



## DRIVE CORD ARRANGEMENT



To string dial cord, turn the main drive drum to maximum counter-clockwise position and use following parts:

- 114955 Clip on end of cord
- 502773 Cord (3 1/2 feet)
- 119087 Ring
- 161384 Tension Spring

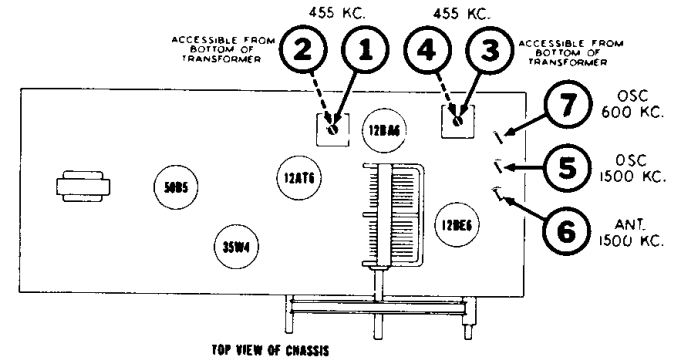

TOP VIEW OF CHASSIS



FRONT VIEW OF CHASSIS

## SOCKET VOLTAGES

Measured with voltmeter having sensitivity of 20,000 ohms per volt except where indicated by (\*). The (\*) symbol designates a vacuum tube voltmeter measurement.

BAND SWITCH SET TO "SW" POSITION


DIAL TUNED TO MAXIMUM COUNTER-CLOCKWISE POSITION

I.F.  
455 KC.

Lettered terminals in illustrations correspond to similarly lettered terminals on the circuit diagram.

117 VOLT 60 CYCLE A.C. POWER SUPPLY USED FOR THESE MEASUREMENTS. ALL VOLTAGES MEASURED BETWEEN SOCKET TERMINALS AND B- LUG UNLESS OTHERWISE INDICATED.

### BOTTOM VIEW OF CHASSIS

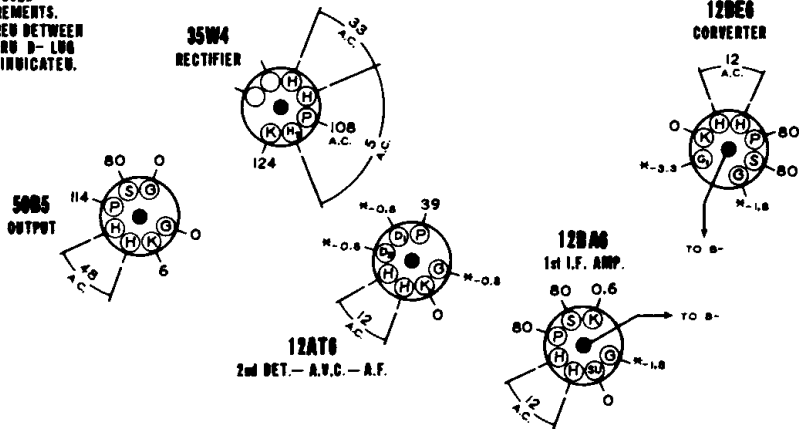

REAR OF CHASSIS