


MOTOROLA INC.

MODEL
37F1 Gray & Pink
37F2 Green & Black

CHASSIS
HS-541

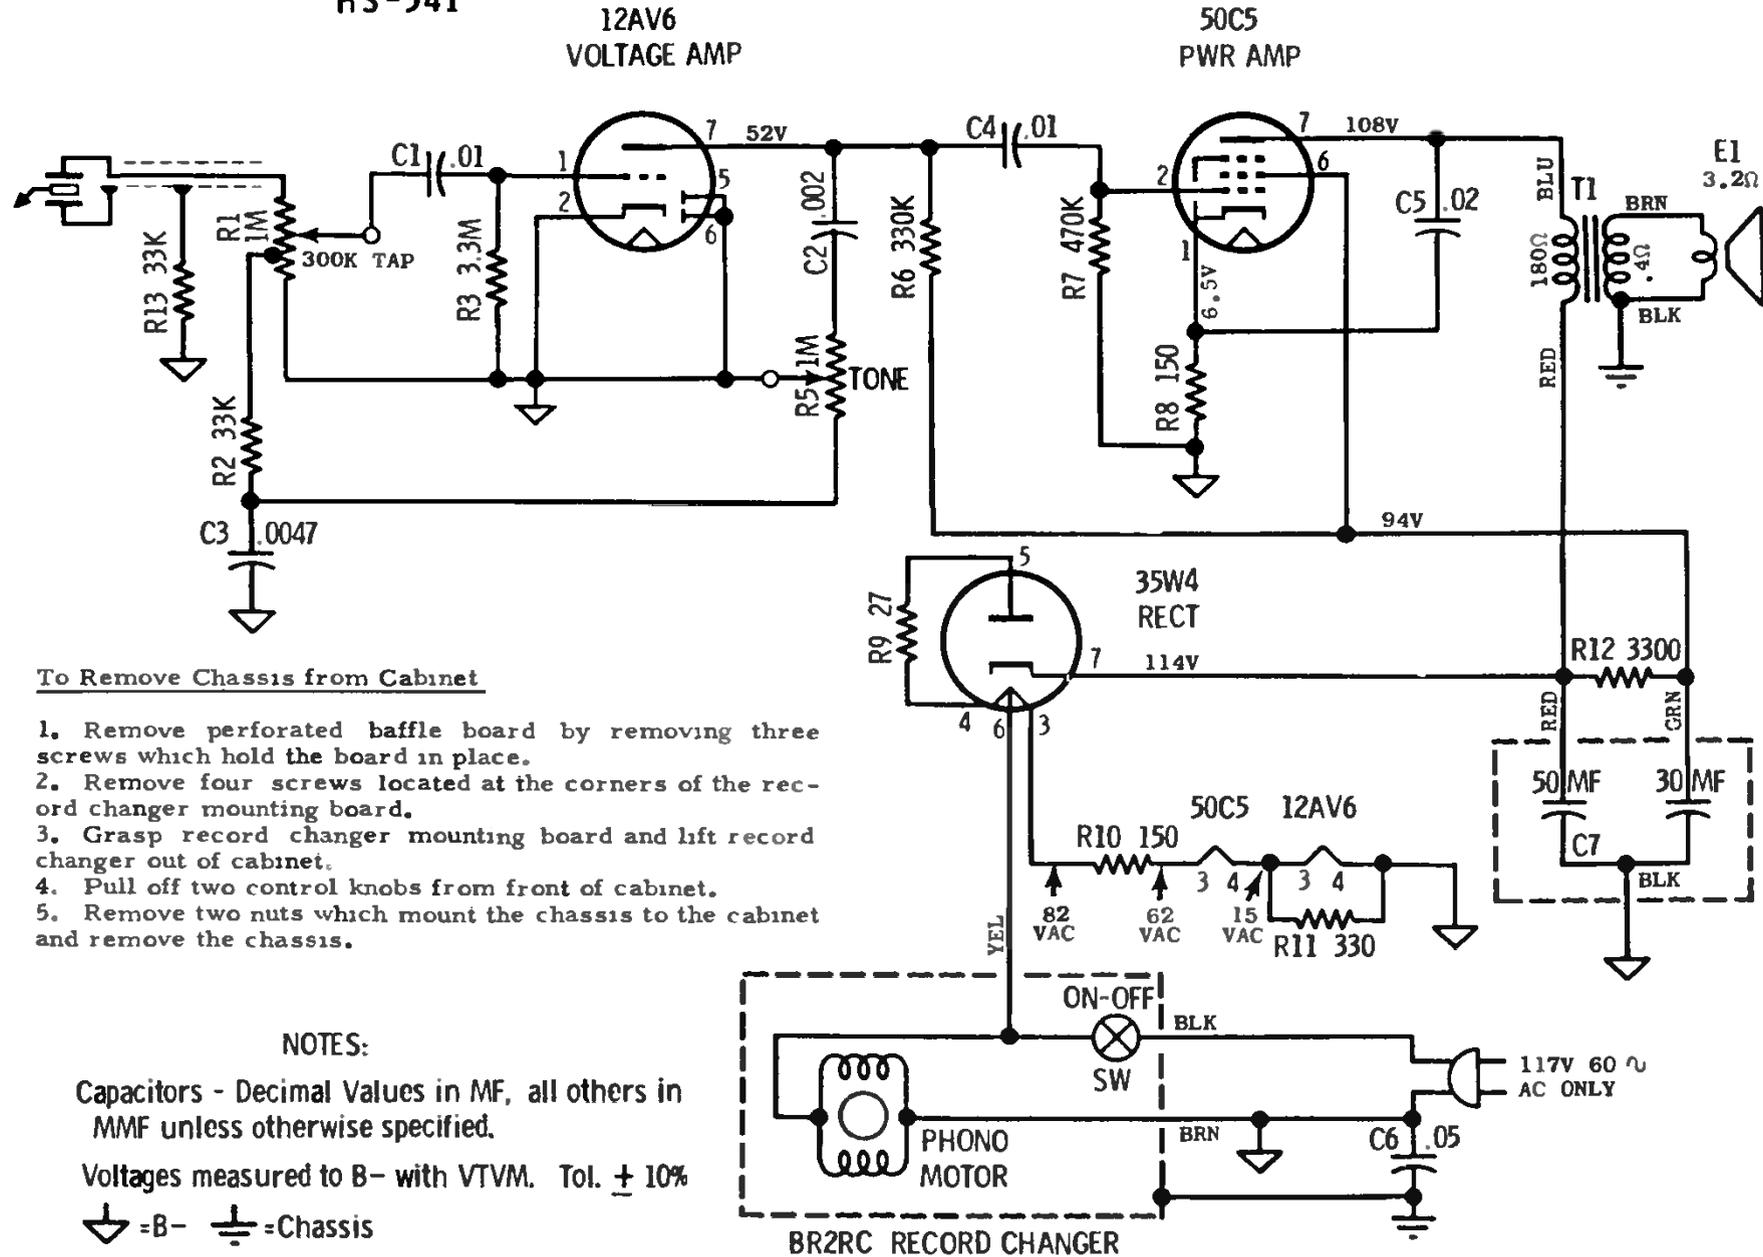

To Remove Chassis from Cabinet

1. Remove perforated baffle board by removing three screws which hold the board in place.
2. Remove four screws located at the corners of the record changer mounting board.
3. Grasp record changer mounting board and lift record changer out of cabinet.
4. Pull off two control knobs from front of cabinet.
5. Remove two nuts which mount the chassis to the cabinet and remove the chassis.

NOTES:

Capacitors - Decimal Values in MF, all others in MMF unless otherwise specified.

Voltages measured to B- with VTVM. Tol. $\pm 10\%$

⏚ = B- ⏚ = Chassis

BR2RC RECORD CHANGER