


MOTOROLA

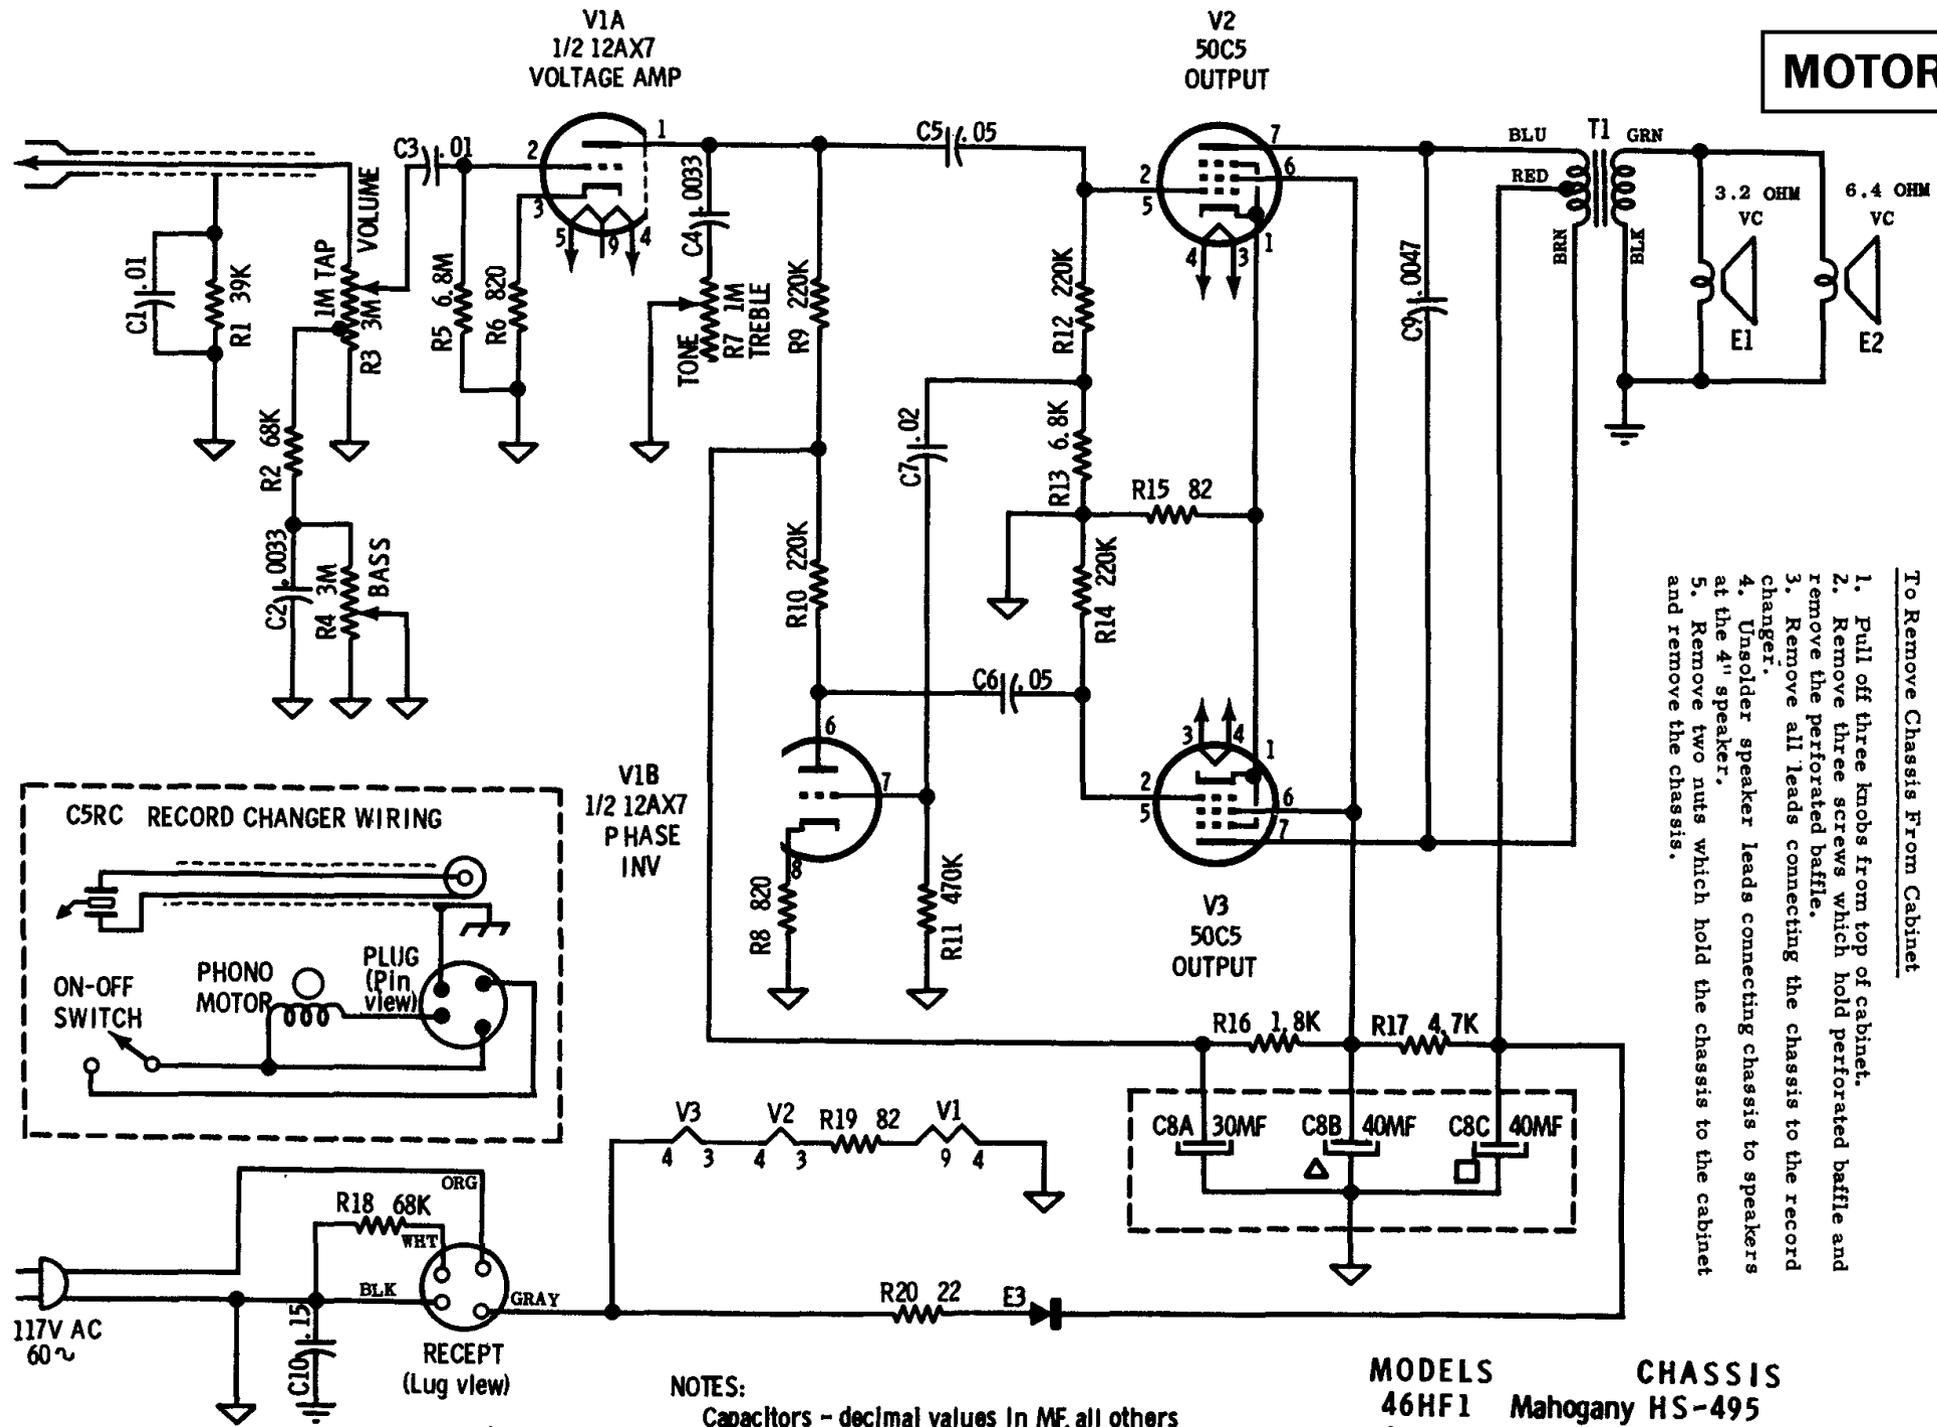

- DISASSEMBLY INSTRUCTIONS**
- To Remove Chassis From Cabinet
1. Pull off three knobs from top of cabinet.
 2. Remove three screws which hold perforated baffle and remove the perforated baffle.
 3. Remove all leads connecting the chassis to the record changer.
 4. Unsolder speaker leads connecting chassis to speakers at the 4" speaker.
 5. Remove two nuts which hold the chassis to the cabinet and remove the chassis.

NOTES:
 Capacitors - decimal values in MF, all others in MMF unless otherwise specified.
 Voltages - measured from point indicated to B- with a VTVM. No signal input. ∇ = B-

MODELS	CHASSIS
46HF1	Mahogany HS-495
46HF1B	Limed Oak HS-495
46HF1D	Mahogany HS-495
46HF1BD	Limed Oak HS-495

MODELS	CHASSIS
46HF1	Mahogany HS-495
46HF1B	Limed Oak HS-495
46HF1D	Mahogany HS-495
46HF1BD	Limed Oak HS-495