


DIAG NO 63059/852-A

NOTES

VOLTAGE READINGS SHOWN WERE MEASURED FROM POINT INDICATED TO CHASSIS WITH A VTVM
 NO SIGNAL WAS TUNED IN
 INPUT VOLTAGE WAS 6.3V DC AT BAT RECEPTACLE
 VOLTAGE TOLERANCE $\pm 10\%$

ALL RESISTORS INDICATED IN OHMS
 K-ONE THOUSAND (1000) OHMS

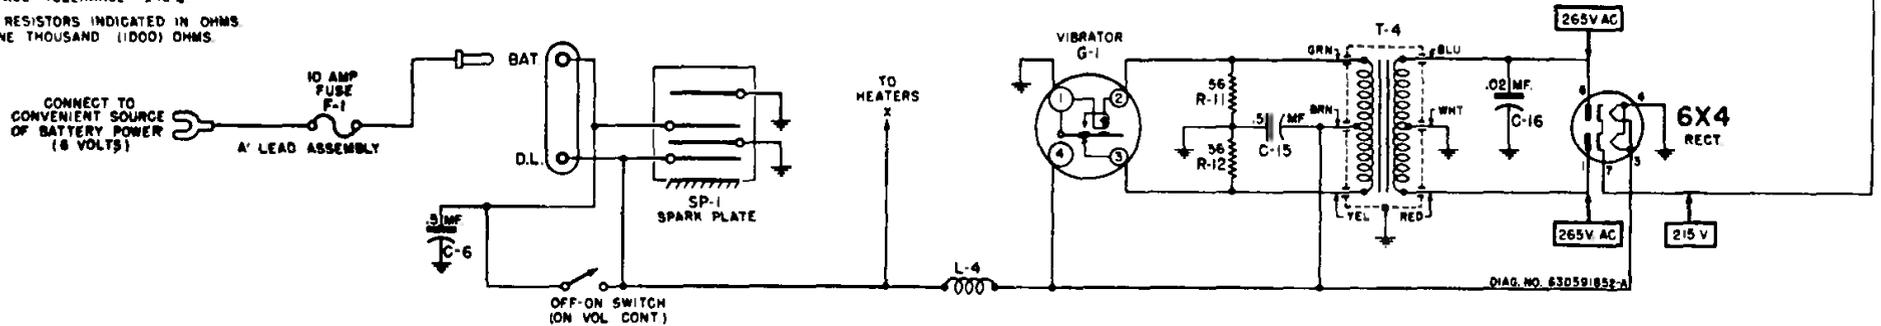

DIAG. NO. 63059/852-A

Compact automotive type superheterodyne receiver with self-contained speaker. Receiver is designed for installation in any car when used with appropriate Motorola control head.

I-F = 455 KC

FREQUENCY RANGE - 535 TO 1600 KC

**MODEL
500**