


SIGNAL GENERATOR				TUNER SETTING	ADJUST FOR MAXIMUM OUTPUT
FREQUENCY	COUPLING CAPACITOR	CONNECTION TO RADIO	GROUND CONNECTION		
455 Kc	.05 Mfd.	Rear stator plates of of tuning condenser.	B Minus Buss Lead	Any point near center where no interfering signal is received.	Slugs at top and bottom of I. F. Coil (T-1) and (T-2)
1620 Kc	.05 Mfd.	Rear stator plates of of tuning condenser.	B Minus Buss Lead	Exactly 1620 Kc.	Oscillator trimmer of Gang. (C5)
1400 Kc	—	Lay Generator lead near back of cabinet.	B Minus Buss Lead	Exactly 1400 Kc.	Antenna trimmer of Gang. (C2)

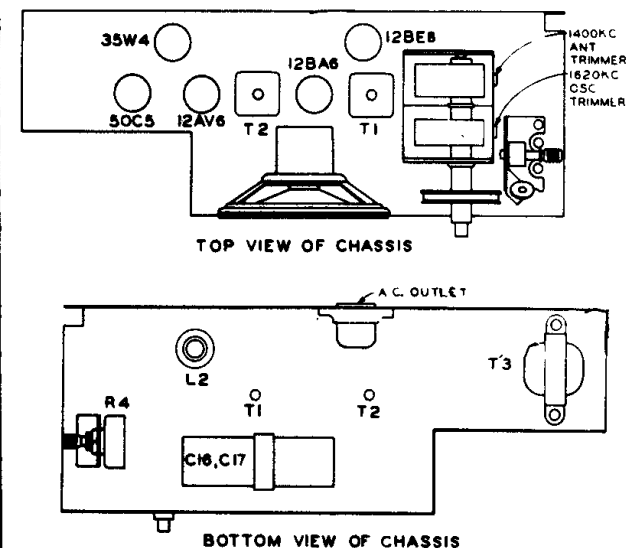

MONTGOMERY WARD Models GSL-1581A, GSL-1582A
 This material also applies to Models GSL-1650A, GSL-1651A,
 which are electrically identical, but have different physical layout.