


Model 37-602

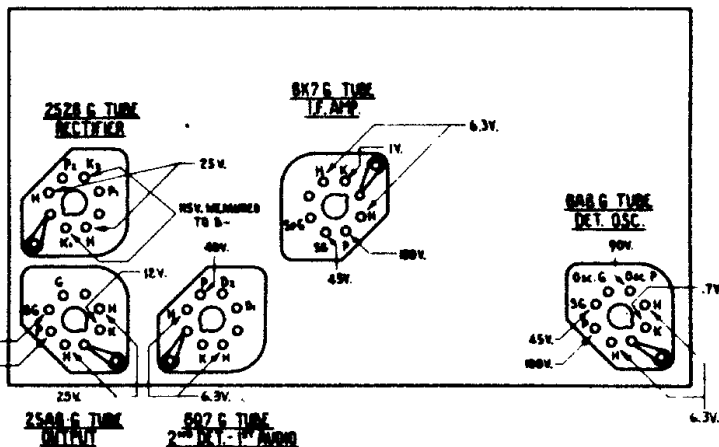

POWER SUPPLY: 115 V., 25 or 60 cycle, A. C.; D. C.

TUBES USED: 1 type 6A8G, Osc. Det., 1 type 6K7

TUBES USED: 1 type 6A8G, Osc. Det., 1 type 6K7G I.F. Amplifier, 1 type 6Q7G, 2nd Det. 1st audio, 1 type 25A6G output, 1 type 25Z6G rectifier.

FREQUENCY RANGE: 530--1800 K.C.

INTERMEDIATE FREQUENCY: 470 K.C.

CURRENT CONSUMPTION: 55 watts.

SPEAKER: B-4.

POWER OUTPUT: $\frac{3}{4}$ watt.

**Tube Sockets as viewed from underside of chassis.
(Voltages measured from socket contacts to B—)**