


Schematic Diagram for Models F-1800, F-1801 and F-1804

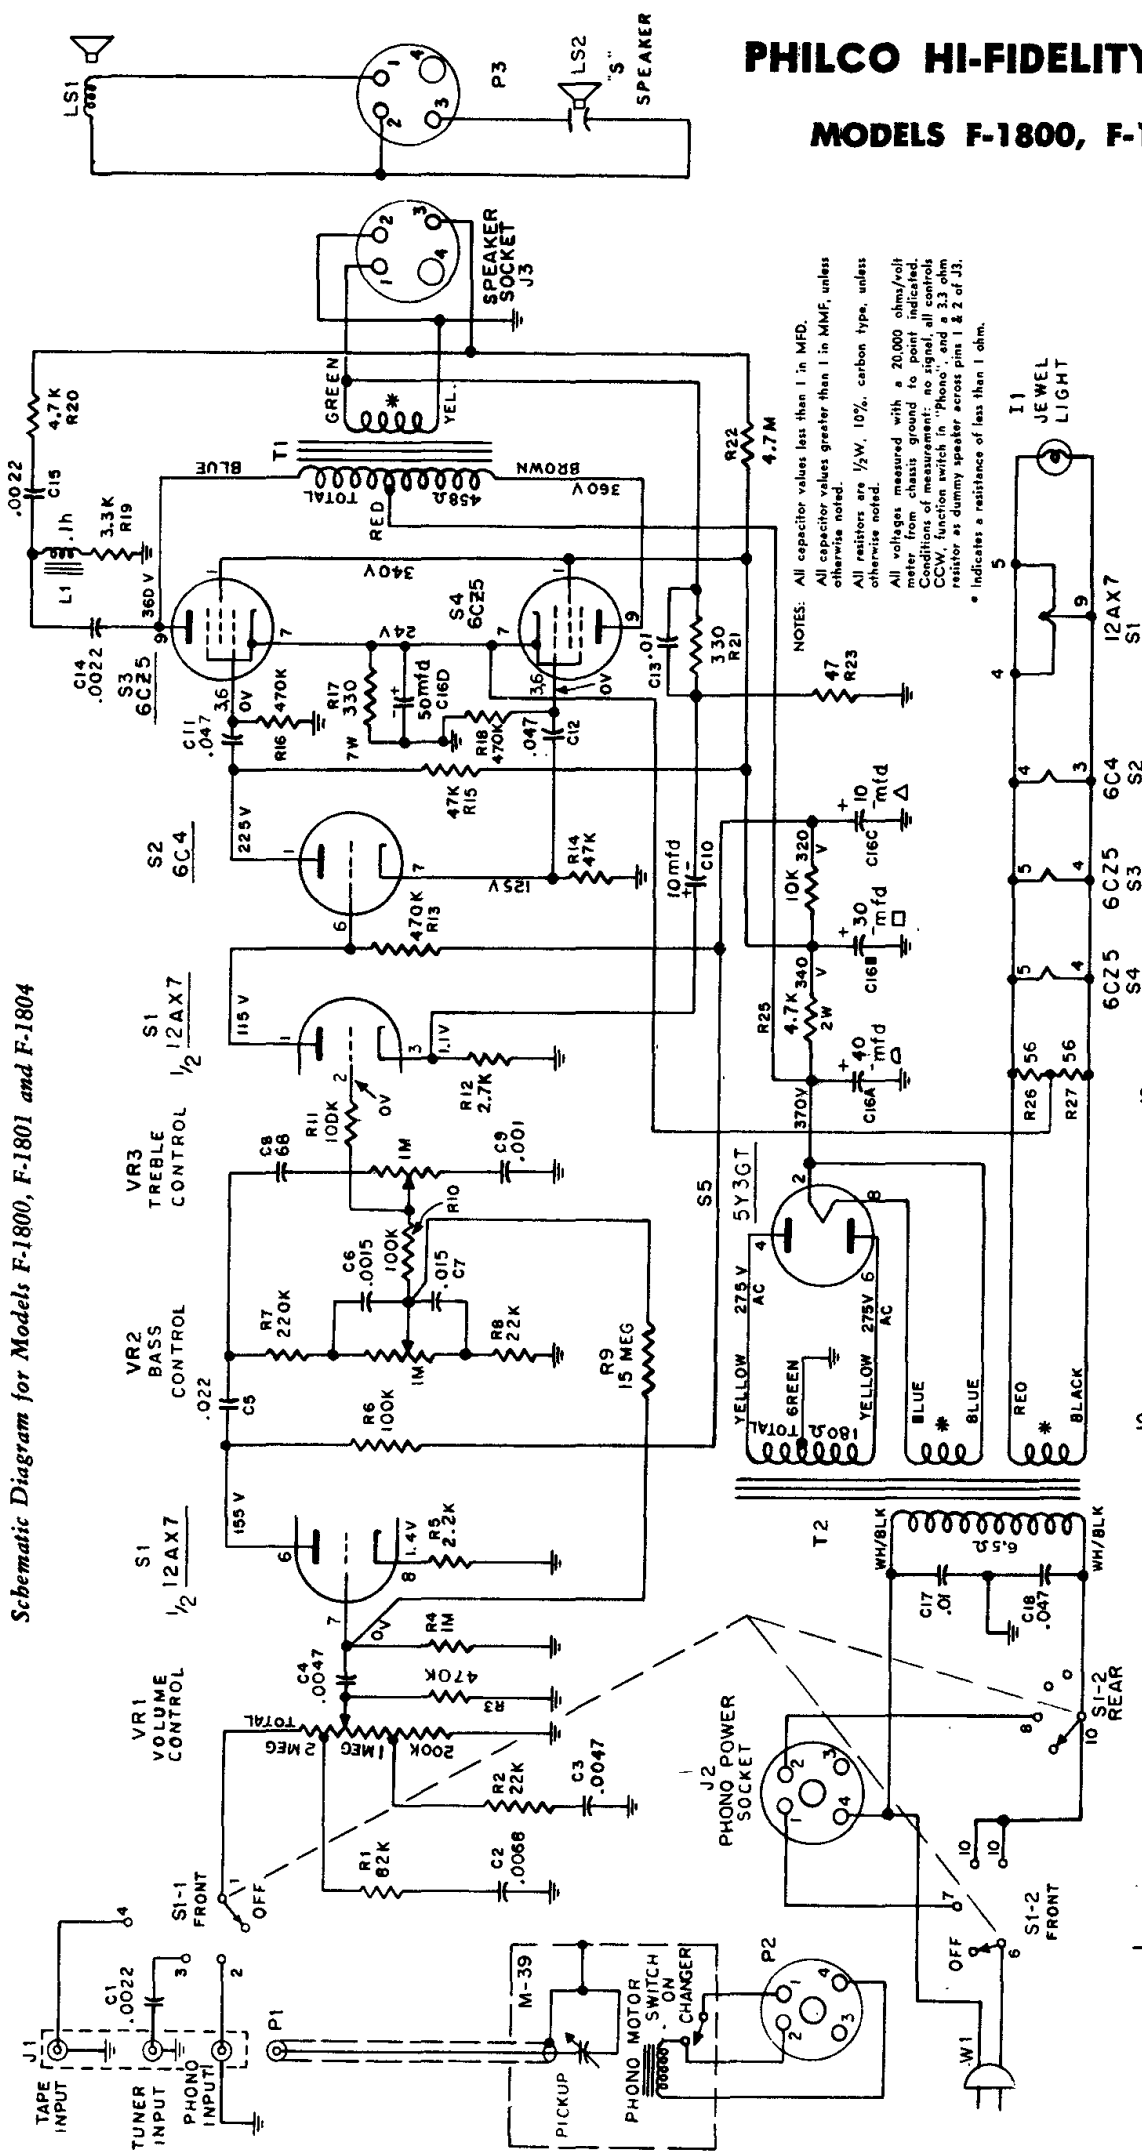

PHILCO HI-FIDELITY PHONOGRAPHS


MODELS F-1800, F-1801 and F-1804

LEAD DRESS INFORMATION

Avoid placing components or leads near R17, the 7 watt, output cathode resistor, or R25, the 2 watt, B + filter resistor. Both resistors operate at a high temperature and may damage any component in contact with them.

The AC leads should be dressed along the sides and down against the subbase.

Care should be taken not to break the wax seal covering L1, the tweeter cross-over choke.

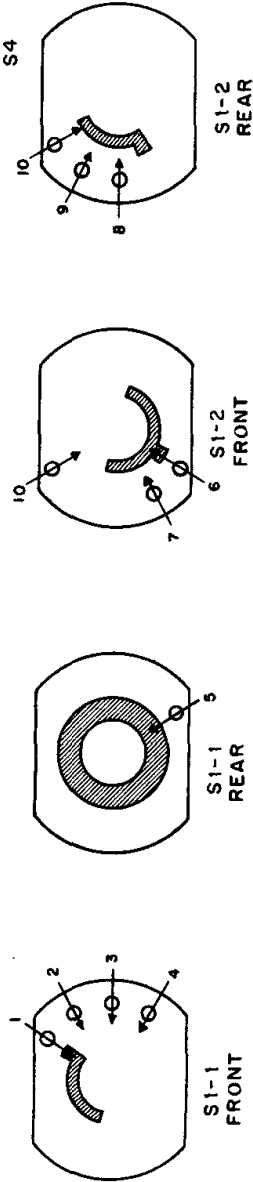

RECORD CHANGER—Philco 4-speed automatic record changer, model M-39. 7-in., 10-in. and 12-in. intermix. Automatic shut-off of entire instrument at end of last record.

SWITCH SHOWN IN MAX. COUNTER CLOCKWISE POSITION "OFF"

SWITCH VIEWED FROM KNOB END

S1-102) IS A SHIELD SECTION, CONTACT 5 IS GROUNDED.