


PHILCO Models H-830, H-832, H-834, H-836

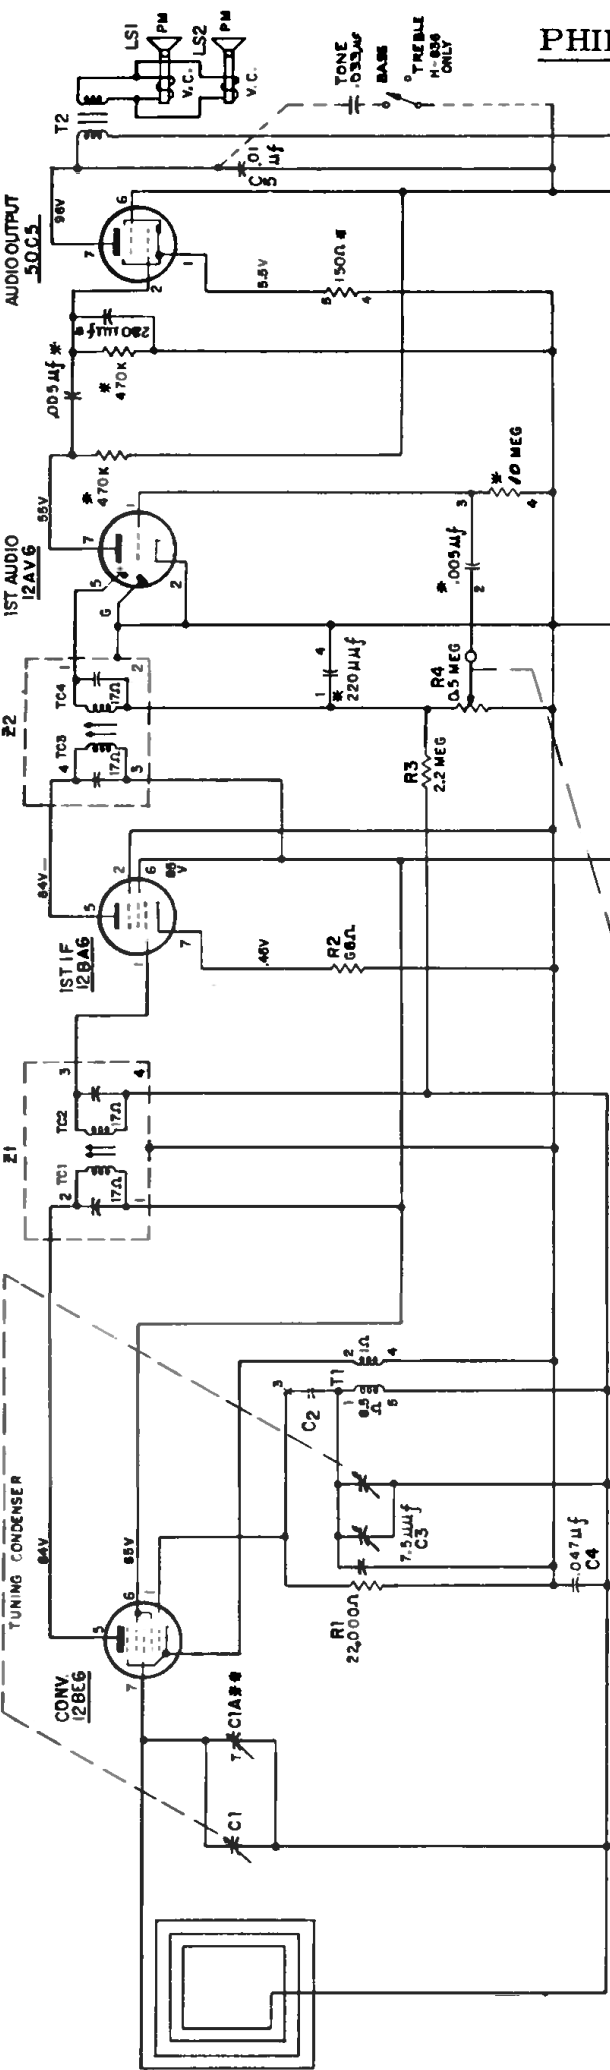

RECT 35W4

RECT 35W4

RECT 35W4

RECT 35W4

RECT 35W4

RECT 35W4


RECT 35W4

RECT 35W4

RECT 35W4

RECT 35W4

RECT 35W4



Schematic Diagram—Models H-830, H-832, H-834 and H-836

I. F. 455 KC.

- NOTES:**
- All capacitors over 1 are in mmf, unless otherwise noted.
 - All capacitors under 1 are in mfd.
 - All resistors are 1/2 watt, 10%, carbon type, unless otherwise noted.
 - Voltages are taken with a 20,000 ohm/volt meter, between the point indicated and B-, under no-signal condition.
 - I1 pilot light, is used in Model H-836 only.
 - C1 is part of osc. coil.
 - Model H-838 uses only 1 speaker and a magnetore antenna.
 - *Indicates component is part of N1.
 - **C1A is on underside of panel.