


NOTES:

- All capacitors over 1 are in mmf, unless otherwise noted.
- All capacitors under 1 are in mfd.
- All resistors are 1/2 watt, 10%, carbon type, unless otherwise noted.
- Voltages are taken with a 20,000 ohm/volt meter, between the point indicated and 8—, under no-signal condition.
- ⊕ Indicates a resistance of less than one ohm.
- 11, Pilot light, is used in Models G-826 and G-828 only. See insert of 35W4 wiring for Models G-820, G-822, and G-824.
- Models G-826 and G-828 have two speakers connected in parallel.
- *Indicates component is part of N1.
- **R7 is grounded to volume control frame.
- ***CIA is on underside of panel.

PHILCO

MODELS G-820, G-822, G-824, G-826 and G-828

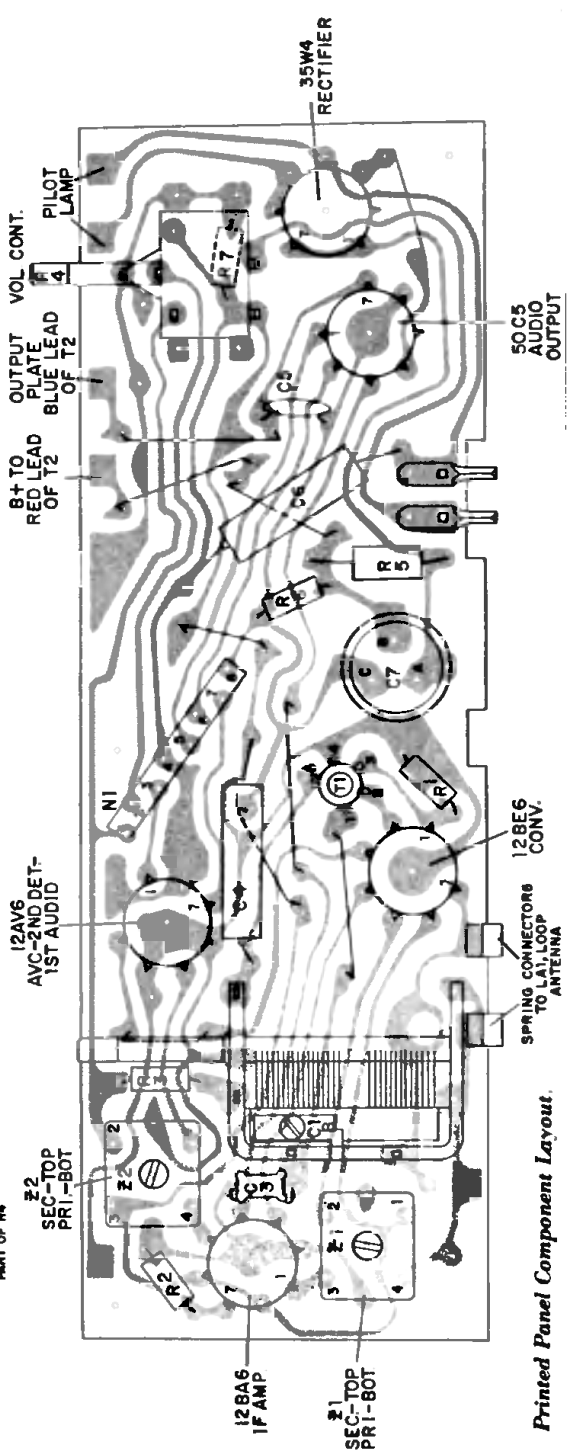

Printed Panel Component Layout.