


# PHILCO UNIVERSAL STEREO AMPLIFIER—MODEL SA-1005

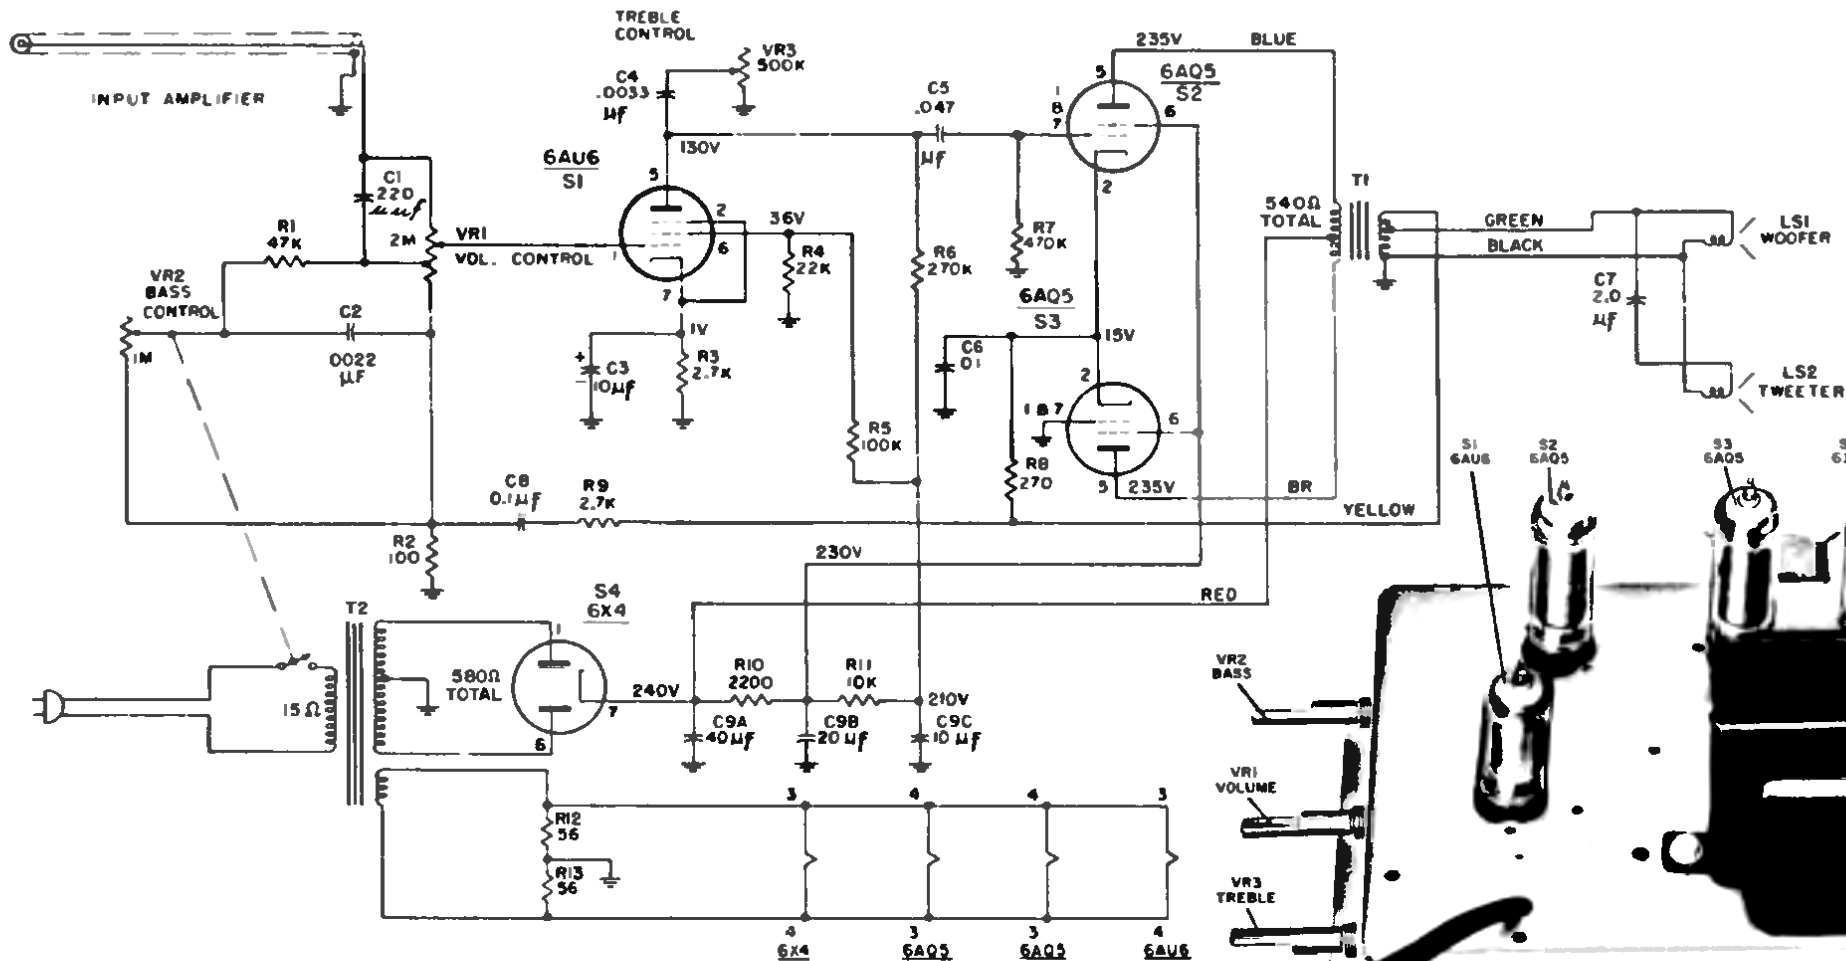

## REPLACEMENT PARTS LIST

Reference Symbol	Description	Service Part No.
C1	Capacitor, 220 $\mu$ f, hi comp.	30-1225-11
C2	Capacitor, .0022 mfd, bass cut	30-4671-20
C3	Capacitor, elect., 10 mfd, 25V, cathode by-pass	30-2417-49
C4	Capacitor, .0033 mfd, treble control	30-4650-38
C5	Capacitor, .047 mfd, coupling	30-4650-62
C6	Capacitor, .1 mfd, cathode by-pass	30-4650-47
C7	Capacitor, 2 mfd, crossover	30-4681-7
C8	Capacitor, .1 mfd, feedback	30-4650-30
C9	Capacitor, elect., 40/20/10 at 350WV	30-2575-47
LS1	Speaker, 6" PM, 8 ohm V.C.	36-1680-8
LS2	Speaker, 4" PM, 16 ohm V.C.	36-1673-11

The SA-1005 is a single-channel amplifier primarily designed as a companion amplifier for the G-line Hi-Fidelity Stereo Phonographs. A 12-ft. audio cable and an a-c line cord are attached to the SA-1005.

T1	Transformer, audio output	32-8939-1
T2	Transformer, power	32-8890-1
VR1	Volume control, 2 meg, tapped	33-5535-46
VR2	Bass control, 1 meg	33-5588-12
VR3	Treble control, 500,000 ohms	33-5587-31