

MISCELLANEOUS PARTS—MODEL 40-125


540 to 1600 K. C. 1.6 to 3.3 M. C.

POWER SUPPLY: 115 volts A. C. or D. C. current.


COMPUTATORS 14A, 14B
14A ARE AT TOP
OF TRANSFORMERS

18 14 33 22 25 16 23 13 4 10 10 17

COMPUTATORS
2A & 2B ARE AT
TOP OF TAPPING
COND. 2A AT FRONT,
2B AT REAR.



CONNECTIONS SHOWN IN
DOTTED LINES ARE FOR
MODEL 40-125 ONLY

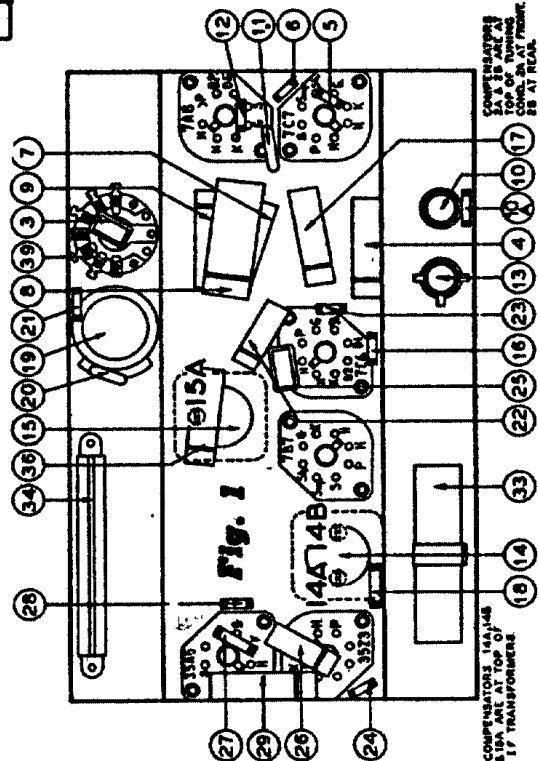

Model 40-120 is dial tuned and assembled in cabinet type "C".

Model 40-125 is equipped with six electric push buttons for automatically selecting stations in addition to dial tuning. Five push buttons are used for stations one of which can be used in combination with a Special type PHILCO TELEVISION receiver for reception of television sound programs. The sixth push button selects dial tuning.