


Models TPM-11, TPM-12, TPM-13, VC-13, VCR-13, VC-14, VCR-14, VC-16, PM-17, VC-17, PM-18, and VC-22, all use tuner RC-1192. Some of these combinations use Pre-Amplifier RS-179 and Power Amplifier RS-177A. Others use amplifier RS-171D or RS-171F.

Diagram illustrating the FM Dial Cord Arrangement. The diagram shows a coiled cable with a 3-turn turn. A label "UPPER SCALE ON DIAL" points to a horizontal line. A label "3 TURNS" points to a coiled section of the cable. A label "FM Dial Cord Arrangement" is positioned vertically on the right. The diagram also includes a vertical line with a horizontal segment and a circular component at the bottom.

VOLTAGES MEASURED TO CHASSIS GROUND WITH "VOLTHYST", SHOULD HOLD WITHIN  $\pm 20\%$  AT 15V LINE. VOLUME CONTROL MINIMUM VALUES ABOVE 1.0 IN MMF EXCEPT AS NOTED. K = 1000 ALL RESISTANCE VALUES IN OHMS. ALL CAPACITANCE VALUES LESS THAN 1.0 IN MMF.

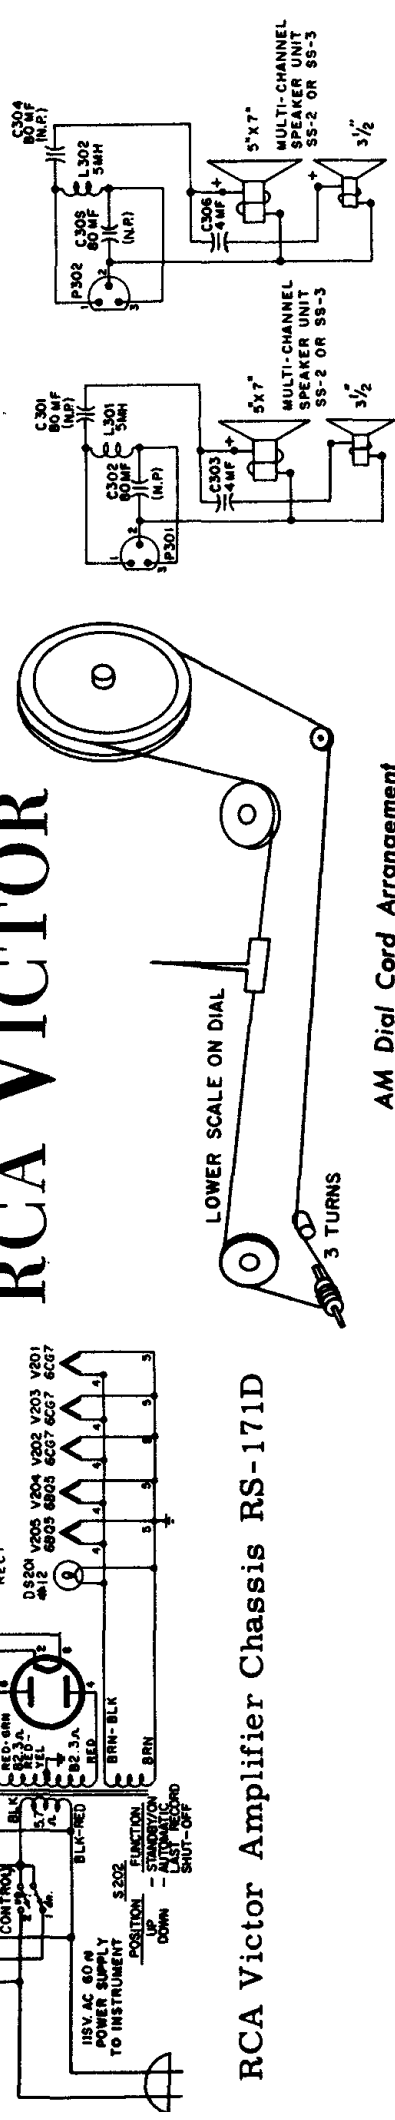

**LOWER SCALE ON DIAL**

### AM Dial Cord Arrangement

# RCA Victor Amplifier Chassis RS-171D