


TECHNICAL DATA

Tuning Range	540-1600	Sensitivity (For 0.05 Watt Output)	300 Microvolts per Meter Average
Intermediate Frequency	455 KC	Power Output (in voice coil)	130 Watts
Power Consumption	15 Watts	Undistorted	300 Watts
Selectivity	A C A 12-1	Maximum	

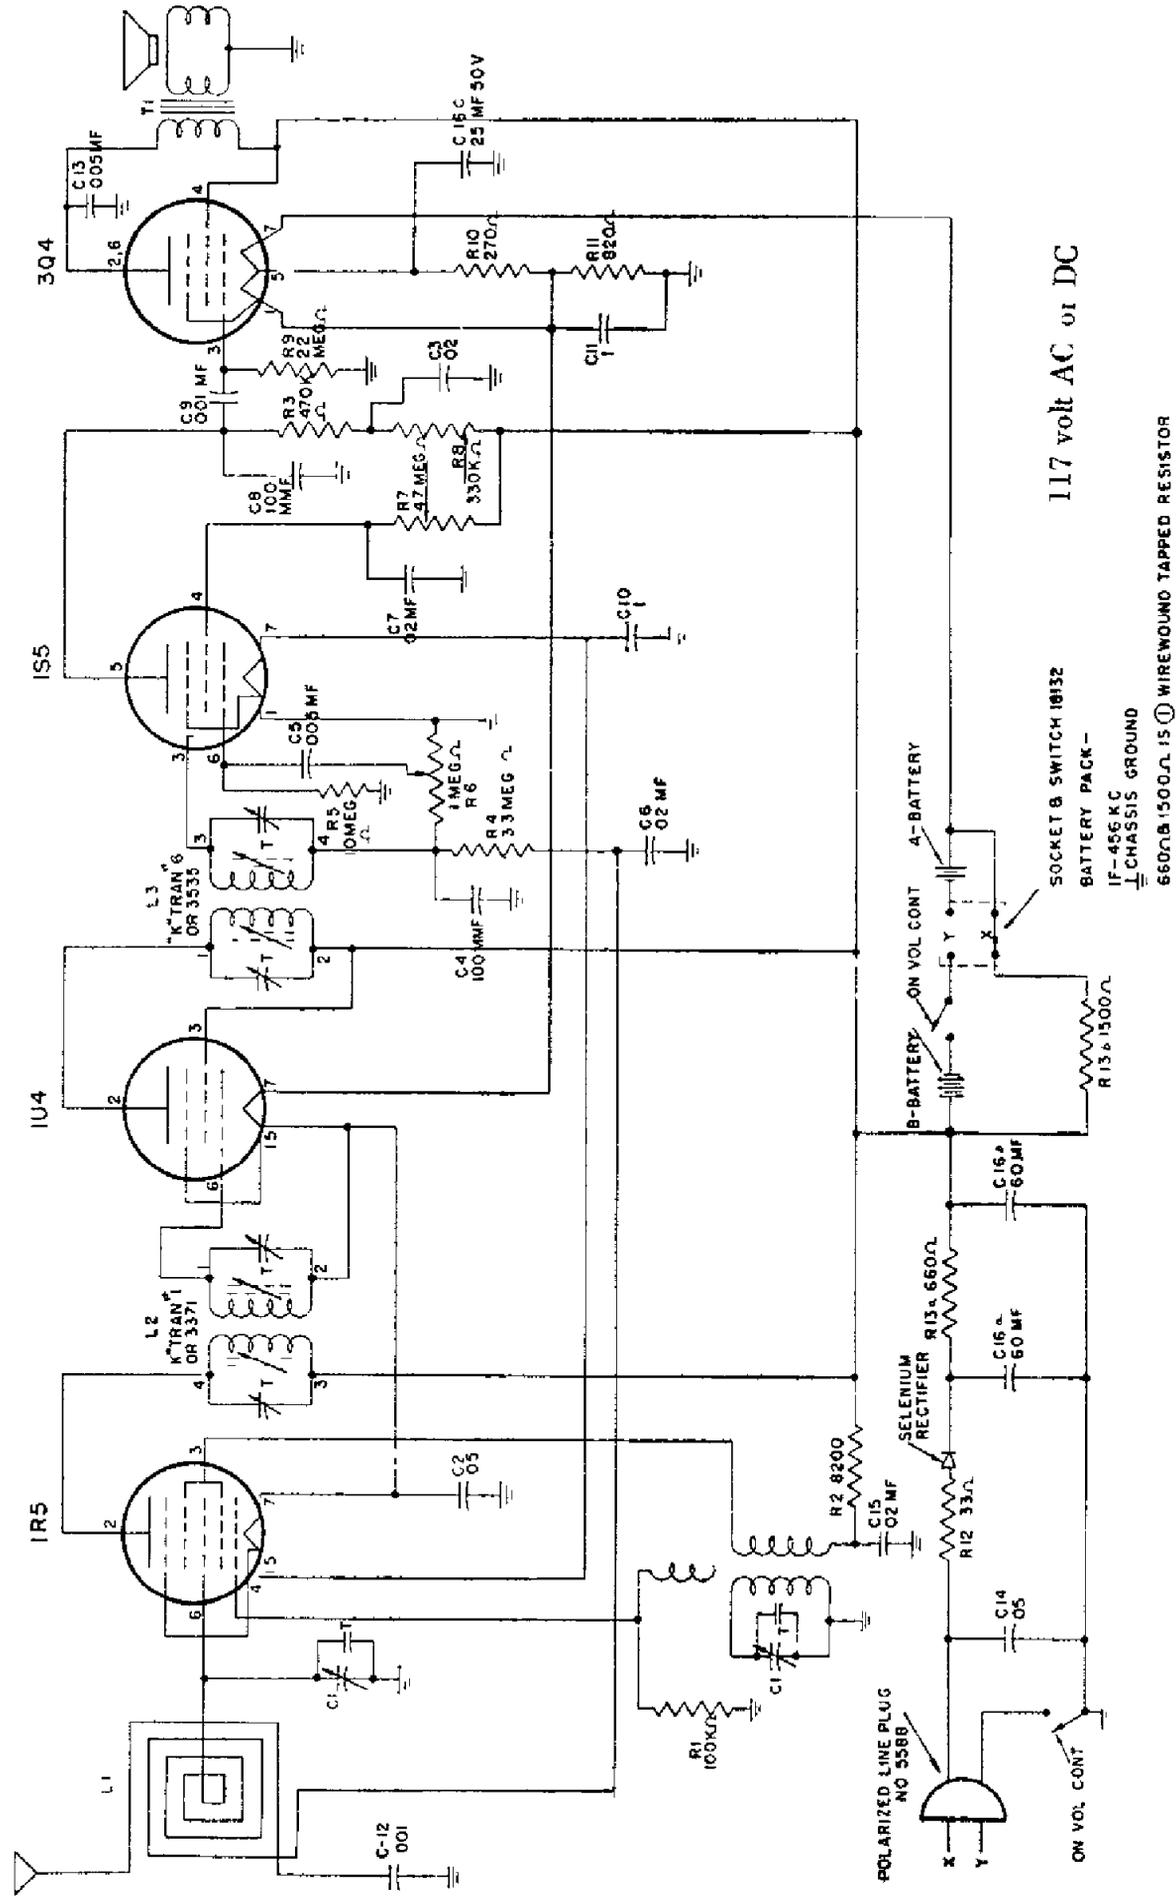

117 volt AC or DC

SOCKET B SWITCH 18132
BATTERY PACK -

IF-455 KC
⊥ CHASSIS GROUND
660Ω & 1500Ω 15 ⊕ WIREWOUND TAPPED RESISTOR