


WESTINGHOUSE Chassis V-2512-3, used in Models H-F1010A, H-F1011A, H-F1012A, H-F1013A, H-F1050B, H-F1051B, H-F1052B, H-F1053B

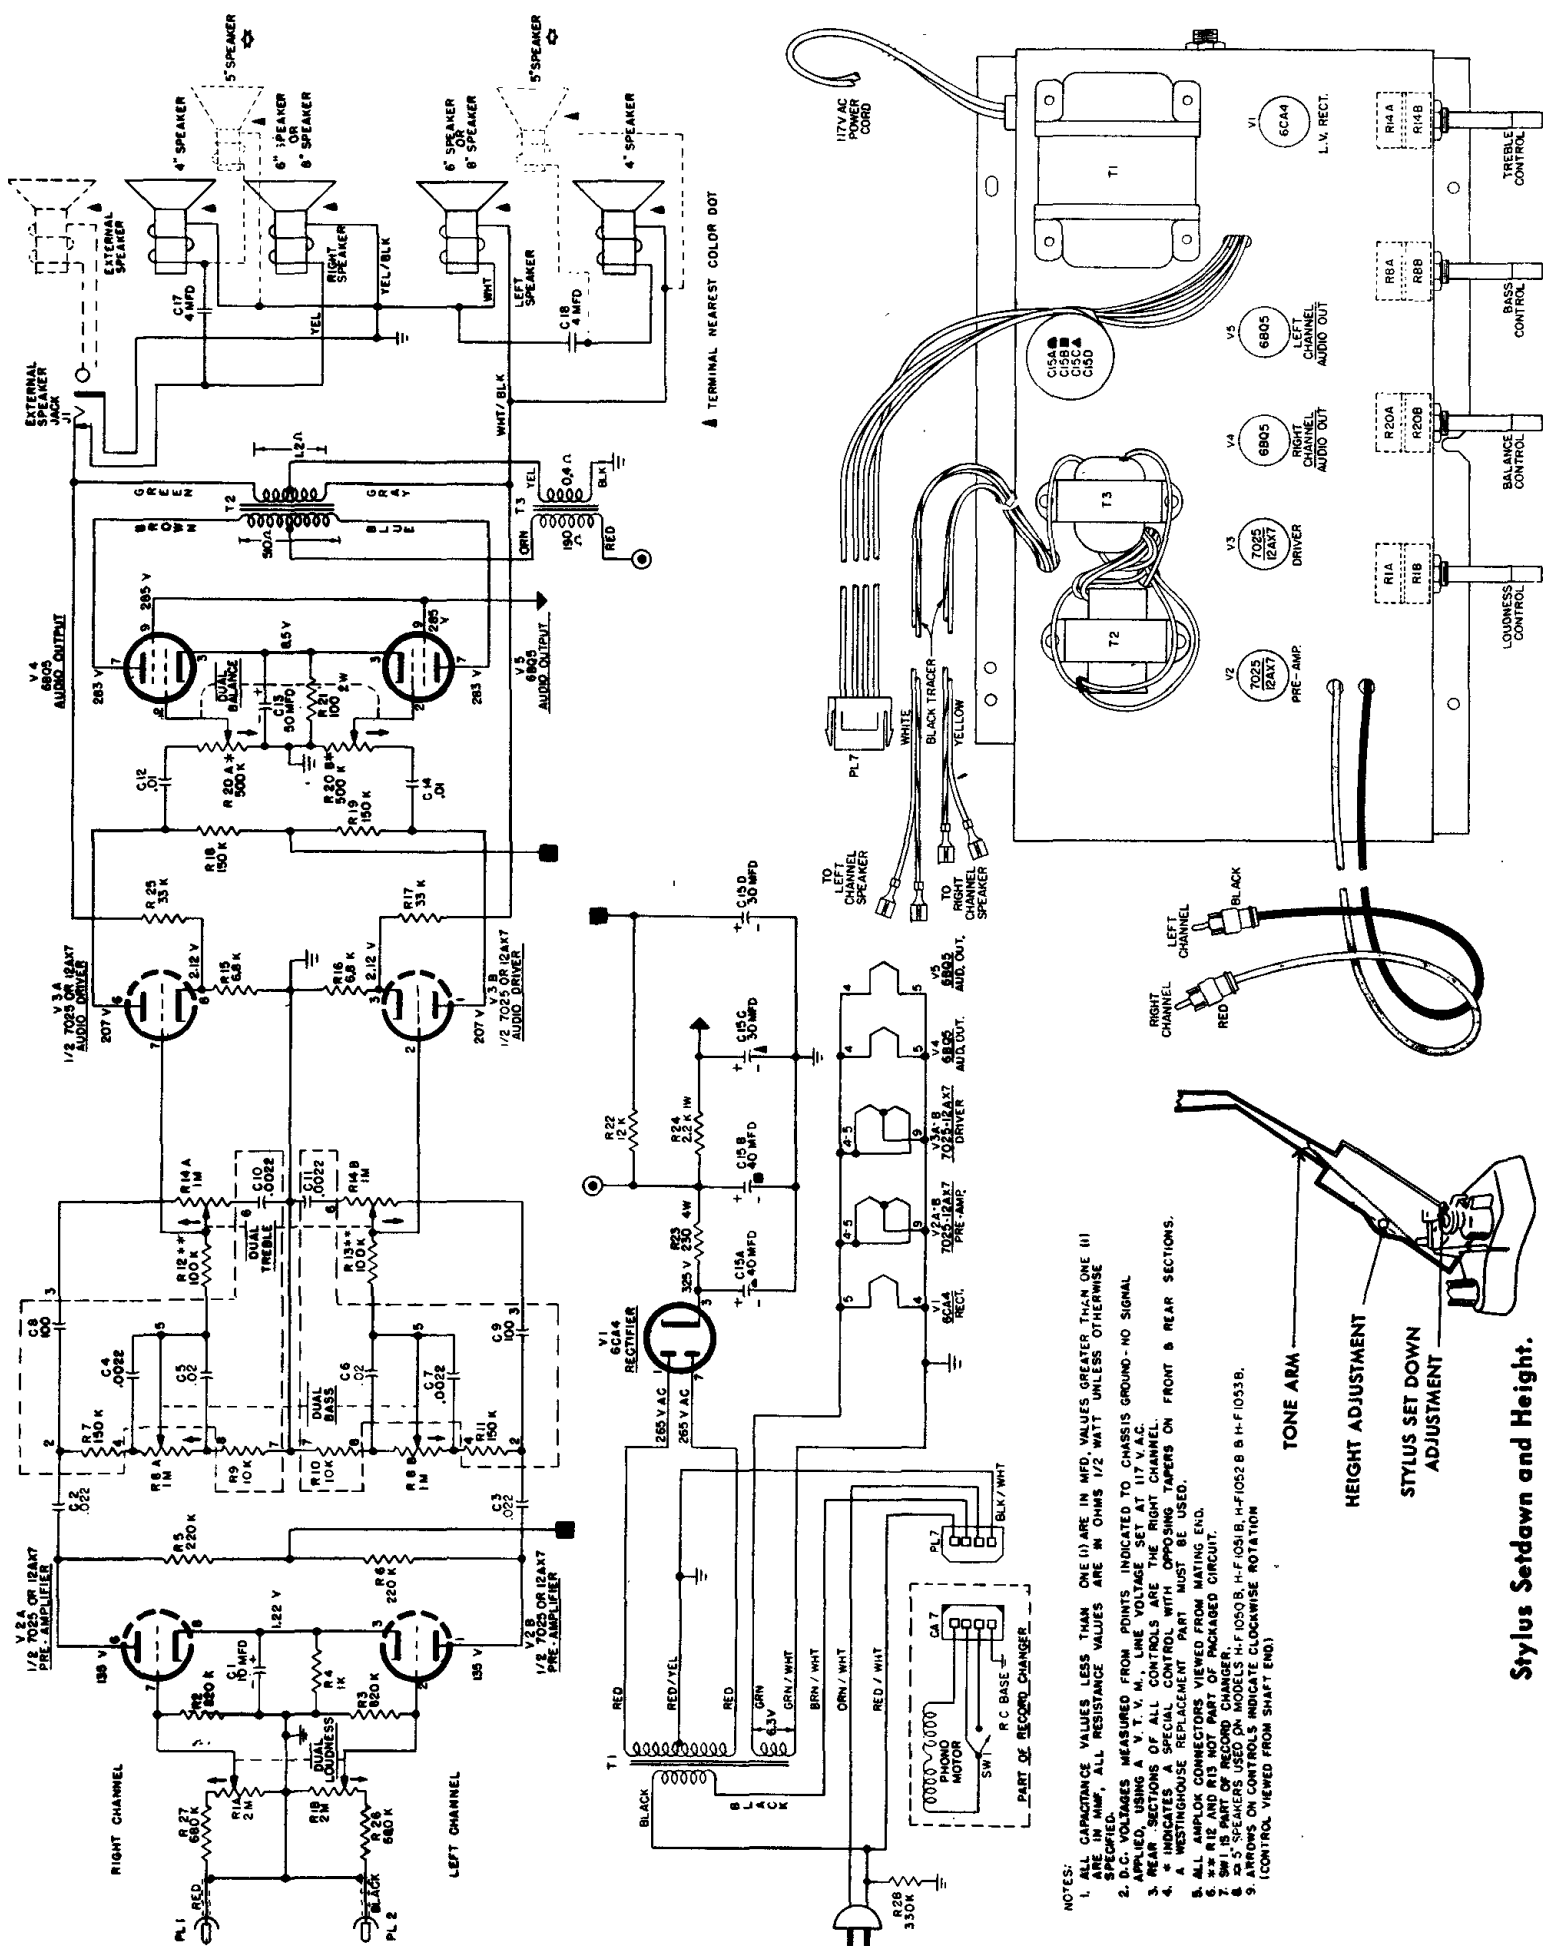

- NOTES:
1. ALL CAPACITANCE VALUES LESS THAN ONE (1) ARE IN MFD. VALUES GREATER THAN ONE (1) ARE IN  $\mu$ MFD. ALL RESISTANCE VALUES ARE IN OHMS 1/2 WATT UNLESS OTHERWISE SPECIFIED.
  2. D.C. VOLTAGES MEASURED FROM POINTS INDICATED TO CHASSIS GROUND-NO SIGNAL APPLIED, USING A V.T.V.M., LINE VOLTAGE SET AT 117 V.A.C.
  3. REAR SECTIONS OF ALL CONTROLS ARE THE RIGHT CHANNEL.
  4. \* INDICATES A SPECIAL CONTROL WITH OPPOSING TAPERS ON FRONT & REAR SECTIONS. A WESTINGHOUSE REPLACEMENT PART MUST BE USED.
  5. ALL AMPLOX CONNECTORS VIEWED FROM MATING END.
  6. SW1 IS PART OF RECORD CHANGER.
  7. SW1 IS PART OF RECORD CHANGER.
  8. 2X 5" SPEAKERS USED ON MODELS H-F1050B, H-F1051B, H-F1052B & H-F1053B.
  9. ARROWS ON CONTROLS INDICATE COUNTERCLOCKWISE ROTATION (CONTROL VIEWED FROM SHAFT END).

Stylus Setdown and Height.