

Fig. 6—Schematic Circuit Diagram

SPECIFICATIONS

Selectivity	- - 38 KC Broad at 1000 Times Signal	Power Consumption	- - 8.2 Amperes at 6.6 Volts
Tuning Frequency Range	- - - 540 to 1600 KC	Power Output (6.6 Volts)	- - - 3.0 Watts Undistorted
Intermediate Frequency	- - - - - 456 KC	Sensitivity	- - - 1 Microvolt at .5 Watt Output
Speaker	- - - - - 6" Electro-Dynamic		

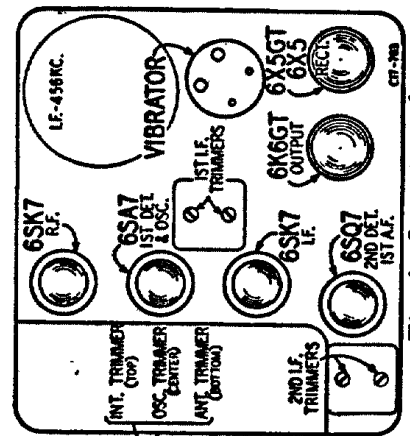


Fig. 4—Location of Tubes and Vibrator