

Frequency Ranges—
 Broadcast 540-1600 KC
 Frequency modulation 88-108 MC


Intermediate Frequency—
 AM 455 KC — FM 10.7 MC

TUBE SOCKET VOLTAGES

Socket voltages are shown on the schematic diagram at the tube socket terminals. All voltages are between the socket terminal and chassis ground. Plate, screen and cathode voltages were taken with a 1000 ohm-per-volt meter with a 300 volt scale used for plate and screen voltages. Audio grid voltages were read with a vacuum tube volt-meter. Conditions of measurement are:

- Line voltage117 Volts AC
- Signal InputNone
- A Variation of ±10% is usually permissible.

Western Auto Supply Co.

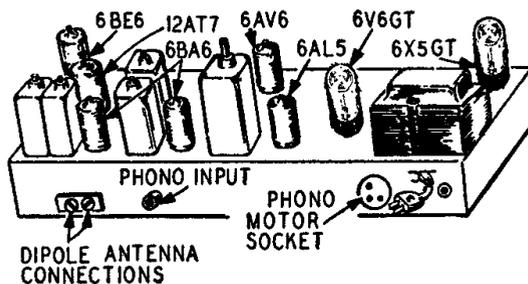

tru-tone
 REG. U. S. PAT. OFF.

MODEL D2027A
Factory Model 227A96-906
FM AND BROADCAST RADIO