


DET.-OSC.  
6A8 G

I. F.  
6K7G

2ND DET.-A.V.C.  
1ST AUDIO  
6Q7 G

POWER  
6V6G

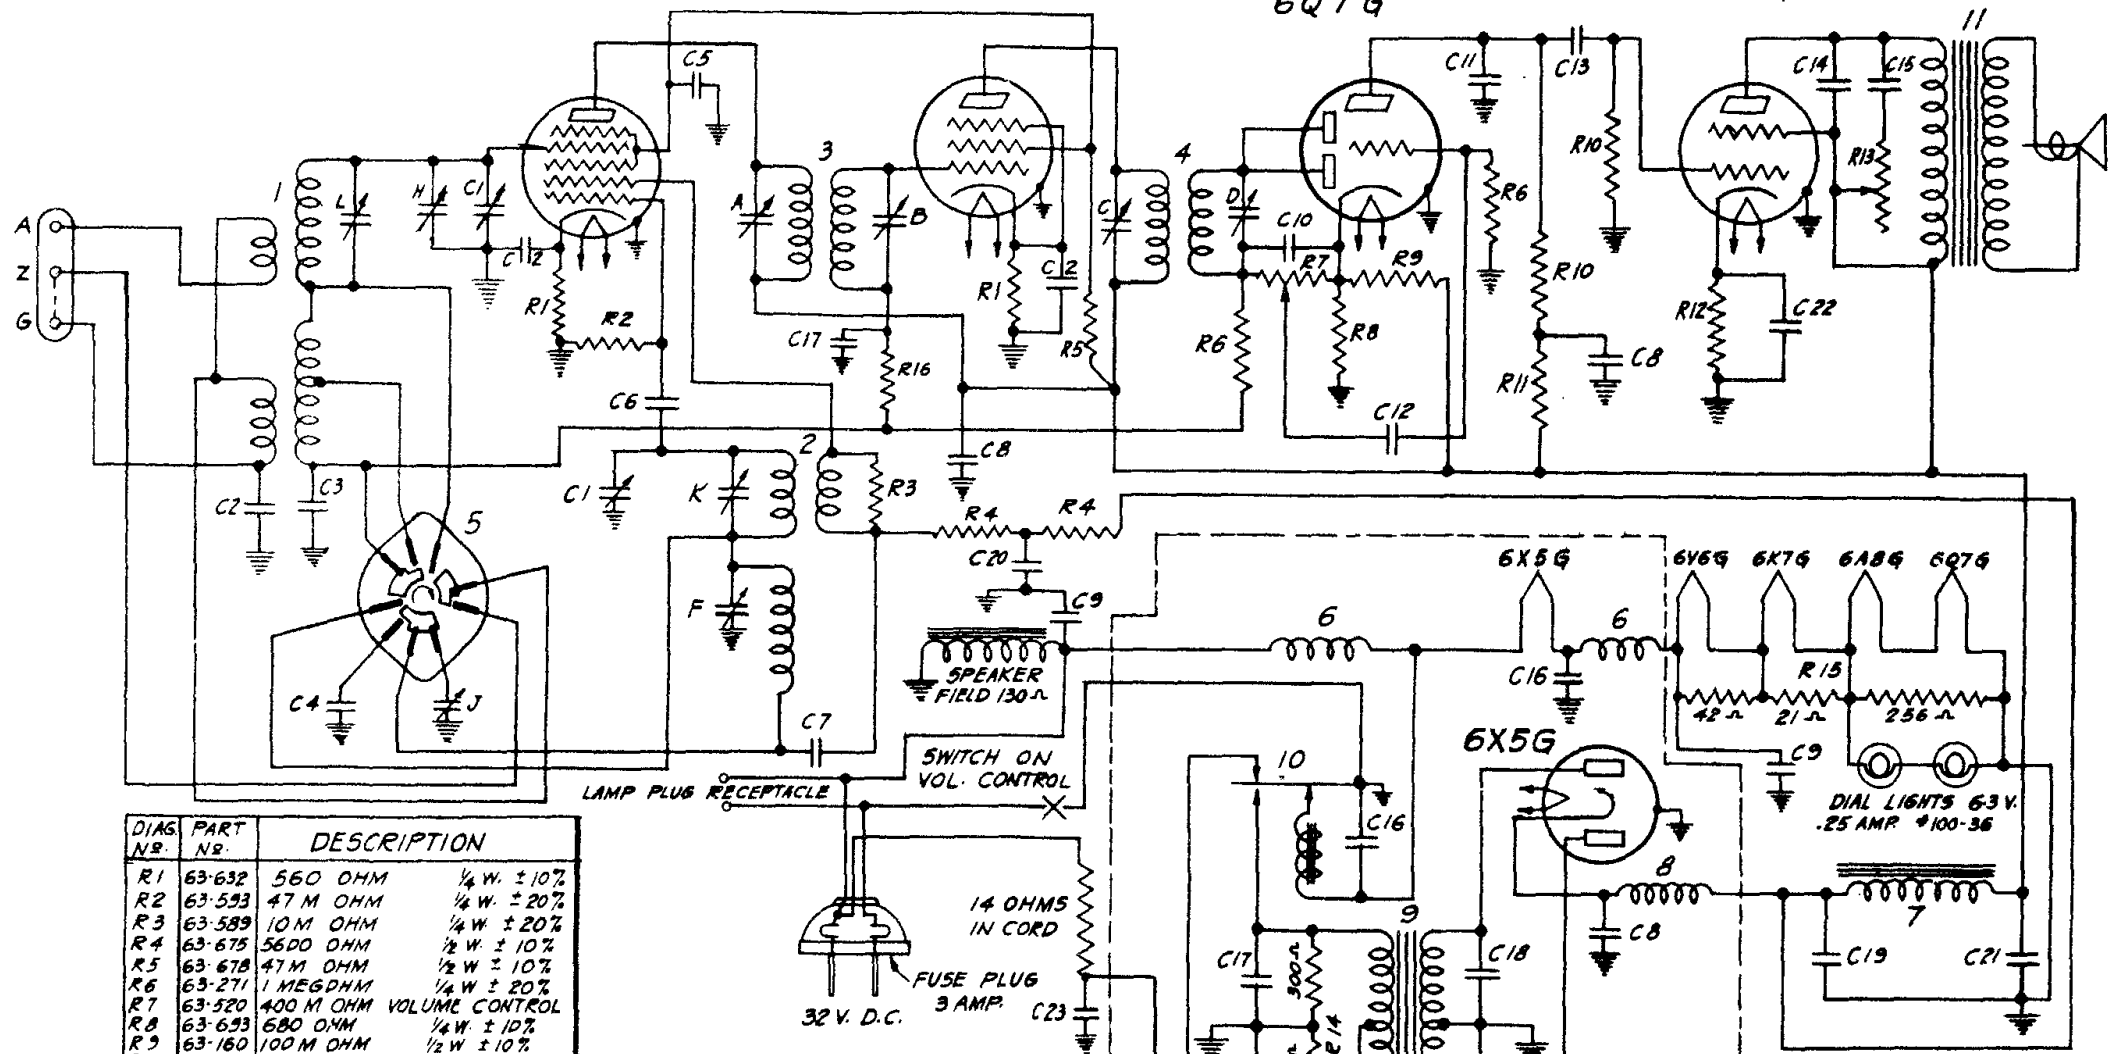

DIAG. NO.	PART NO.	DESCRIPTION
R1	63-632	560 OHM 1/4 W. ± 10%
R2	63-593	47 M OHM 1/4 W. ± 20%
R3	63-589	10 M OHM 1/4 W. ± 20%
R4	63-675	5600 OHM 1/2 W. ± 10%
R5	63-678	47 M OHM 1/2 W. ± 10%
R6	63-271	1 MEG OHM 1/4 W. ± 20%
R7	63-520	400 M OHM VOLUME CONTROL
R8	63-633	680 OHM 1/4 W. ± 10%
R9	63-160	100 M OHM 1/2 W. ± 10%
R10	63-597	470 M OHM 1/4 W. ± 20%
R11	63-296	220 M OHM 1/4 W. ± 20%
R12	63-805	300 OHM WIREWOUND 1/2 W. ± 10%
R13	63-521	50 M OHM TONE CONTROL
R14	63-804	2 SECTION CANOHM
R15	63-928	3 SECTION CANOHM
R16	63-595	100 M OHM 1/4 W. ± 20%
C1	22-632	TWO GANG VARIABLE CONDENSER
C2	22-250	.05 MFD. 200 V.
C3	22-487	.05 MFD. 400 V.
C4	22-563	FIXED PADDER
C5	22-212	.05 MFD. 400 V.
C6	22-127	.25 MMFD. 600 V.
C7	22-358	.002 MFD. 600 V.
C8	22-170	.1 MFD. 400 V.
C9	22-350	.25 MFD. 200 V.
C10	22-162	.0001 MFD. 600 V.
C11	22-147	.0005 MFD. 600 V.
C12	22-327	.02 MFD. 200 V.
C13	22-435	.02 MFD. 600 V.

DIAG. NO.	PART NO.	DESCRIPTION
C14	22-229	.005 MFD. 600 V.
C15	22-171	.05 MFD. 600 V.
C16	22-199	.5 MFD. 200 V.
C17	22-185	.01 MFD. 200 V.
C18	22-646	.1 MFD. 1000 V.
C19	22-647	.8 MFD. DRY ELECT. 450 V.
C20	22-648	.8 MFD. DRY ELECT. 450 V.
C21	22-648	.516 MFD. DRY ELECT. 450 V.
C22	22-648	.10 MFD. DRY ELECT. 25 V.
C23	22-243	.01 MFD. 400 V.

5 TUBE SUPERHETERODYNE - 2 BANDS  
I. F. FREQUENCY - 456 K.C.  
32 V. D.C. CHASSIS NO. 5523  
ZENITH RADIO CORPORATION