


WESTINGHOUSE ELEC. INTERNATIONAL CO.

MODEL M108

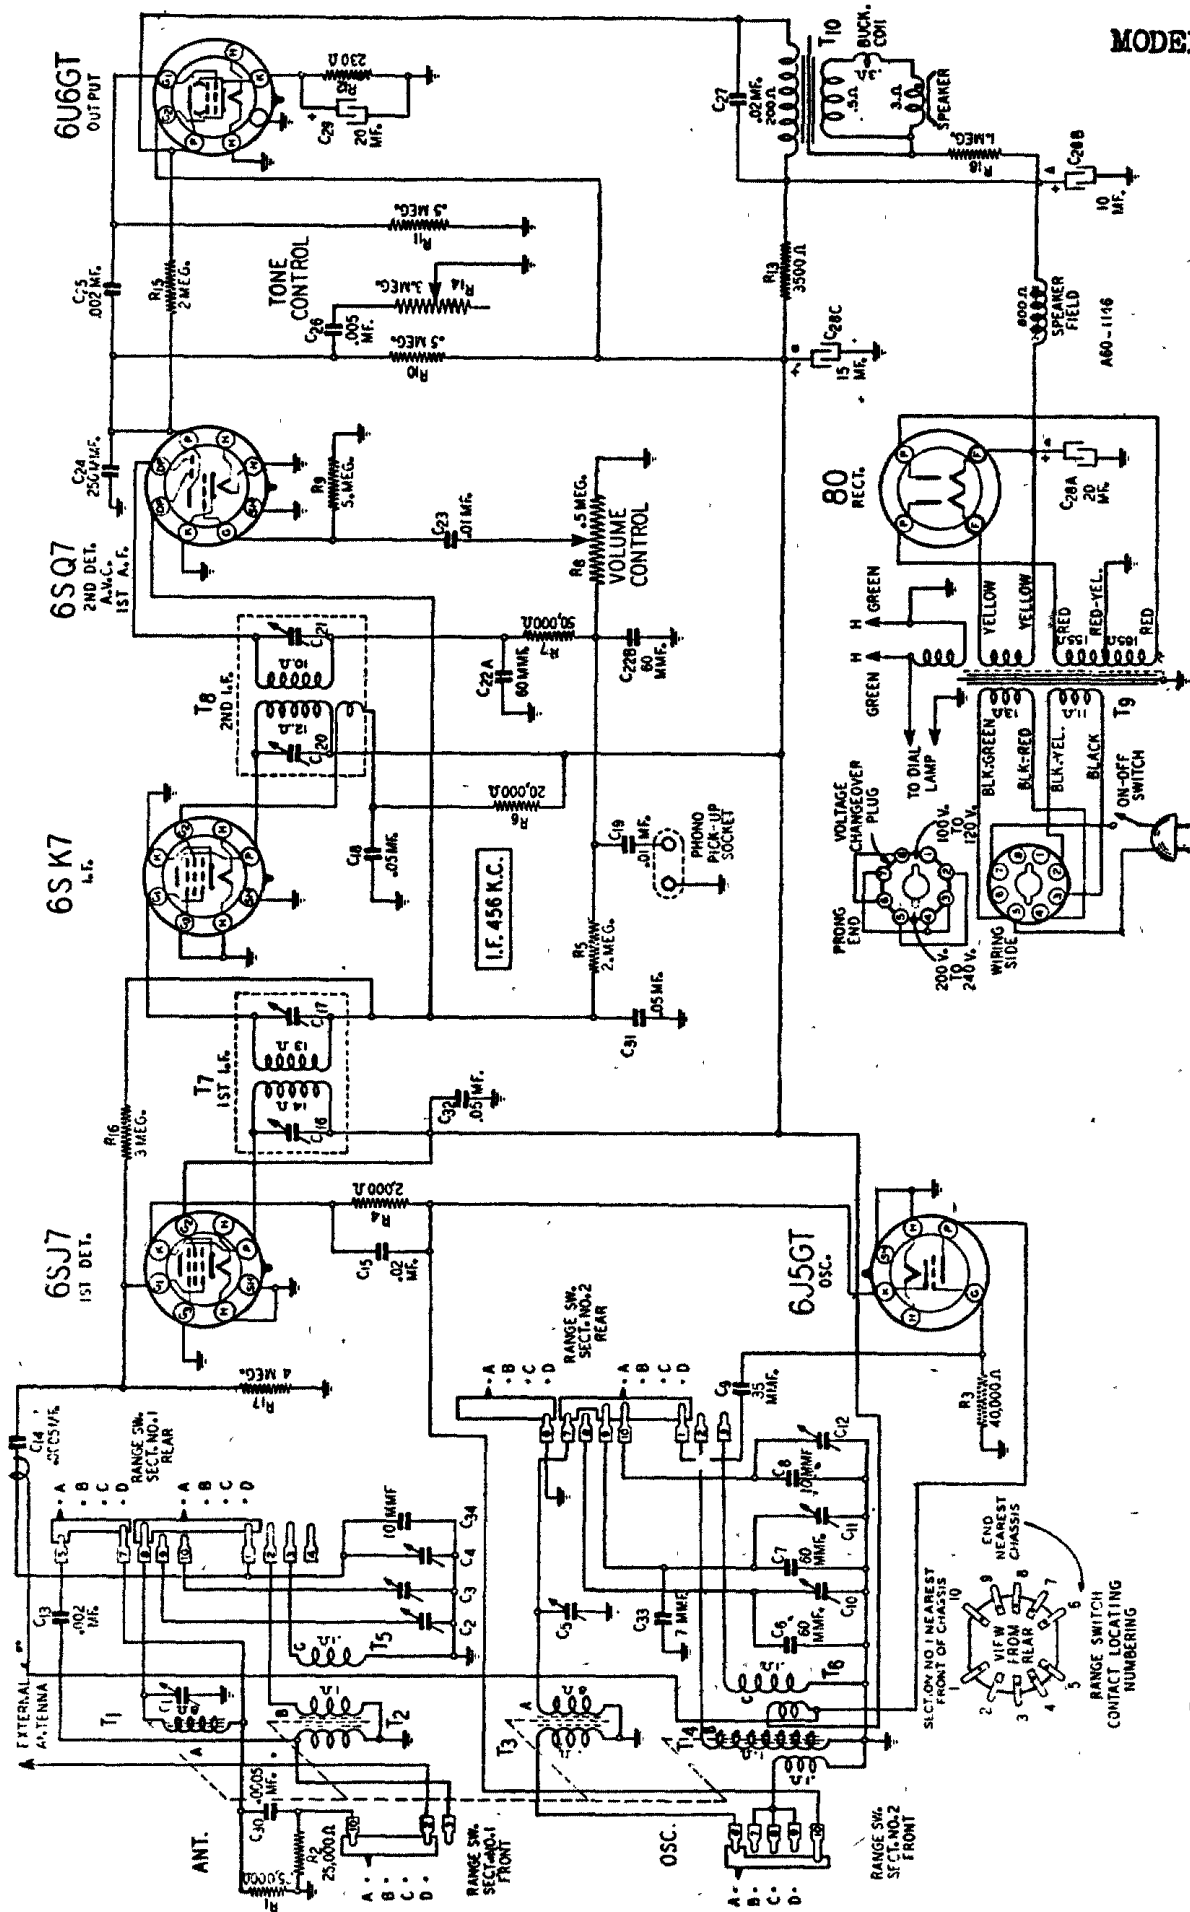

SPECIFICATIONS

Power Consumption—(At 120 volts 60 cycles)	- 65 Watts	
Power Output	- 5 Watts Undistorted 7 Watts Maximum	
Selectivity	- 38 KC Broad at 1000 times Signal	
Intermediate Frequency	- 456 KC	
Speaker	- 6" Electro-Dynamic	
Range	Frequency Range	Sensitivity (For 0.5 Watt output)
A Range	535 to 1610 KC	10 Microvolts Average
B Range	3.2 to 7.4 MC	12 Microvolts Average
C Range	8.32 to 12.05 MC	12 Microvolts Average
D Range	15.0 to 22.0 MC	18 Microvolts Average