


FIXED CONDENSERS MARKED ©
ENCLOSED IN 1 CONTAINER MARKED
#80-59

SIZE	COLOR	USED FOR
#20	RED	+180. R.F. & A.F. PLATE LEAD.
#20	WHITE	+250 FILTER CHOKE.
#20	YELLOW	AUDIO CATHODES.
#20	SLATE	SCREENS & CATHODES R.F.
#20	BLACK	AUDIO GRID LEADS, GRID COMMON.
#20	GREEN & OLIVE	POWER FILA'S. & PILOT LIGHT.
#14	BLACK	224 & 227 FILAMENTS.
#14	BLUE	" " "
#20	BROWN OR SLATE	224 DET. SCREEN.

ZENITH RADIO CORP.
CHICAGO, ILL.
MODEL 80
HYPERMETRON

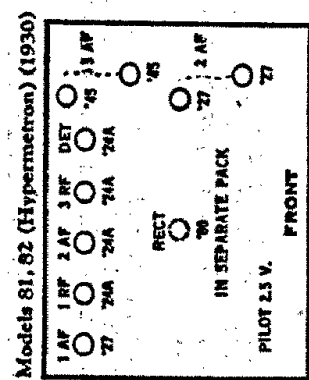

MODELS 82, 89 (60 cycle) and 822, 892 (25 cycle) ZENITH HYPER METRON RECEIVERS.
Models 82 and 89 Zenith Receivers operate on 105 to 125 volts, 50 to 60 cycle alternating current. Models 822 and 892 operate on 105 to 125 volts, 25 to 40 cycle alternating current (A. C.) The power supply ZE80 is used on 50 to 60 cycle current. The power supply ZE802 is used on 25 to 40 cycle current.