


(For chassis wiring view see next page adjacent at right)

121-236  
2ND I.F.

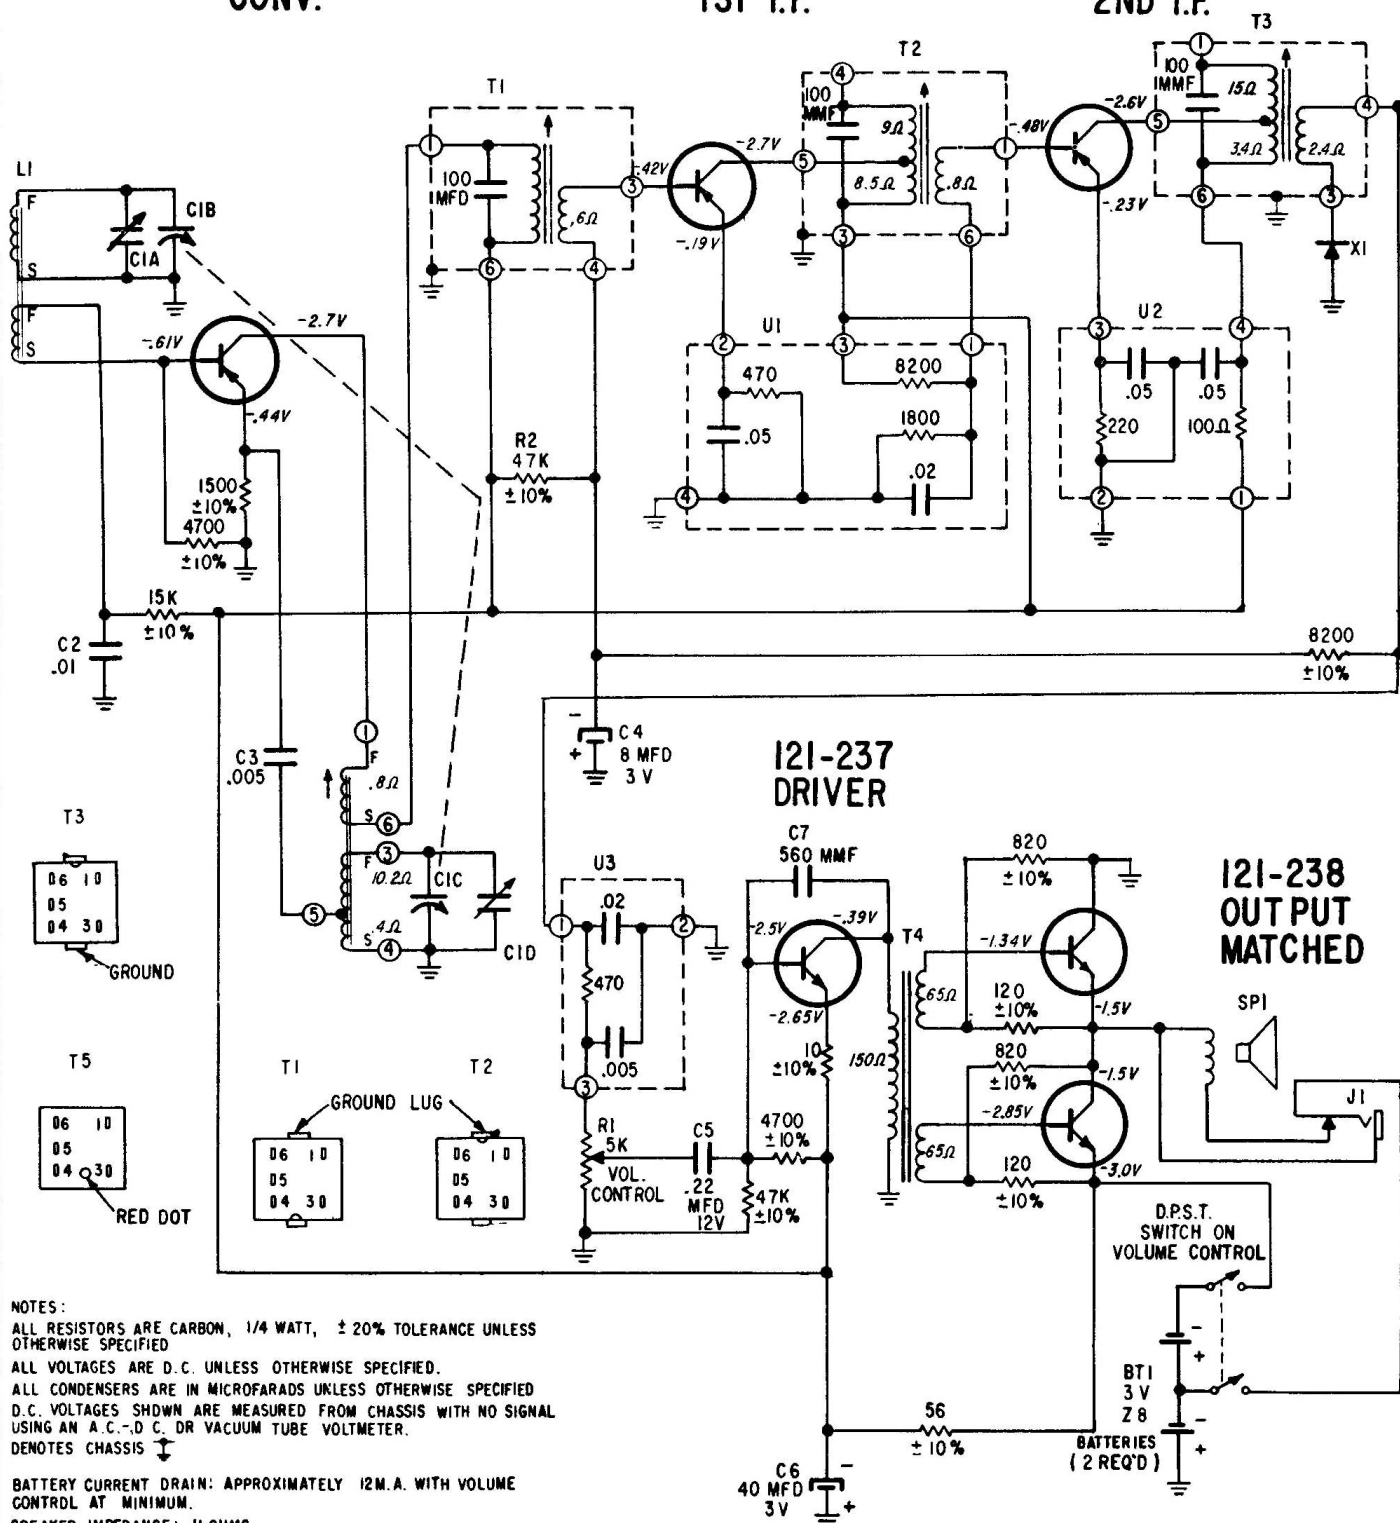

NOTES :

ALL RESISTORS ARE CARBON, 1/4 WATT,  $\pm 20\%$  TOLERANCE UNLESS OTHERWISE SPECIFIED

ALL VOLTAGES ARE D.C. UNLESS OTHERWISE SPECIFIED.

ALL CONDENSERS ARE IN MICROFARADS UNLESS OTHERWISE SPECIFIED

D.C. VOLTAGES SHOWN ARE MEASURED FROM CHASSIS WITH NO SIGNAL USING AN A.C.-D.C. OR VACUUM TUBE VOLTMETER.

DENOTES CHASSIS 

BATTERY CURRENT DRAIN: APPROXIMATELY 12M.A. WITH VOLUME CONTROL AT MINIMUM.

**SPEAKER IMPEDANCE: 11 OHMS**

