



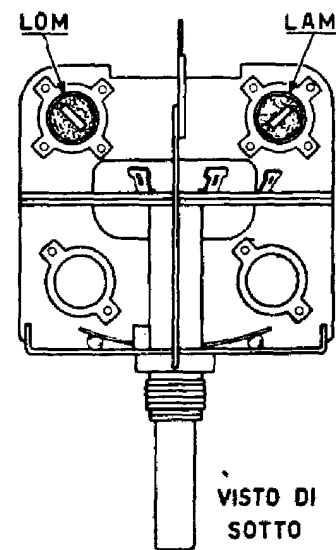


190 ÷ 580 m	}	1	COM (*)	Kc. 1400	m.	214	CAM (*)
		2	LOM	Kc. 600	m.	500	LAM
14 ÷ 43 m.		3	LOC 1	Mc. 7,5	m.	40	LAC 1
43 ÷ 130 m.		4	LOC 2	Mc. 2,5	m.	120	LAC 2

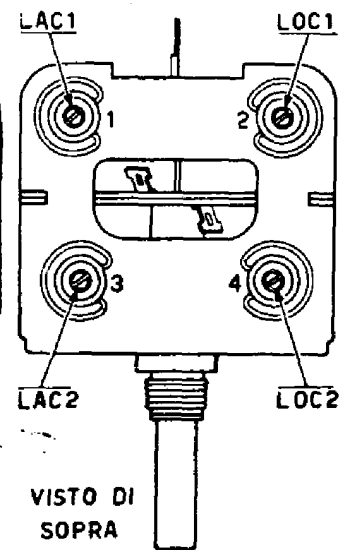

<b>4 valvole</b> a riscaldamento diretto . . . . .	DK92 - DF91 - DAF91 - DL94
<b>3 gamme d'onda</b> . . . . .	14 ÷ 43; 43 ÷ 130; 190 ÷ 580 mt.
<b>Sensibilità</b> in antenna . . . . .	25 µV
<b>Potenza di uscita</b> . . . . .	0,250 watt
<b>Media frequenza</b> . . . . .	467 kHz
<b>Sensibilità</b> per la Media Frequenza . . . . .	80 µVolt
<b>Altoparlante</b> . . . . .	SP 200/10.000
<b>Scala parlante</b> . . . . .	multicolore, stazioni italiane raggruppate, indicazione dei comandi
<b>Controlli</b> . . . . .	interruttore - volume - gamma - sintonia
<b>Alimentazione</b> . . . . .	rete c.c. 110 V - rete c.a. 110 - 125 - 140 - 160 - 220 V (42 ÷ 60 Hz)
	Pila 90 V (+ rosso — nero)
	Pila 7,5 V (+ arancione — azzurro)
<b>Mobile</b> . . . . .	in materiale plastico
<b>Dimensioni</b> . . . . .	mm. 510 x 270 x 260
<b>Peso</b> con imballo . . . . .	kg. 6.500 circa

**G 175 - 4 VALVOLE**

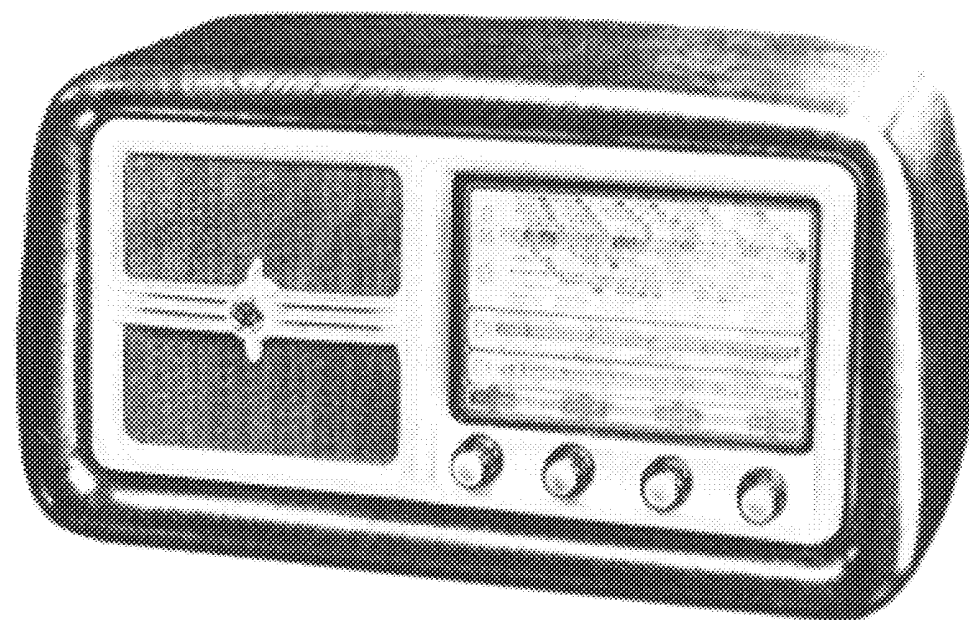

**G 175 L - 4 VALVOLE**

