



# PHILIPS-SERVICE

# 874 A




200—600 m  
800—2000 m

25 777 200

103—253 V

44 W

200—600 m	200—600 m	800—2000 m
VOL. max.	VOL. max.	VOL. max.
225 m—200 pF—	225 m—200 pF—	C13, C15 1000 m
C13, C15 225 m	C13, C15 225 m	1000 m—200 pF—
C16 max.	225 m	C22 max.

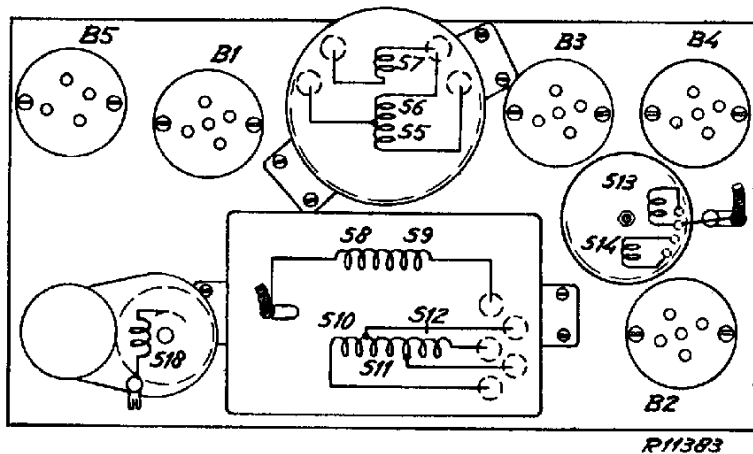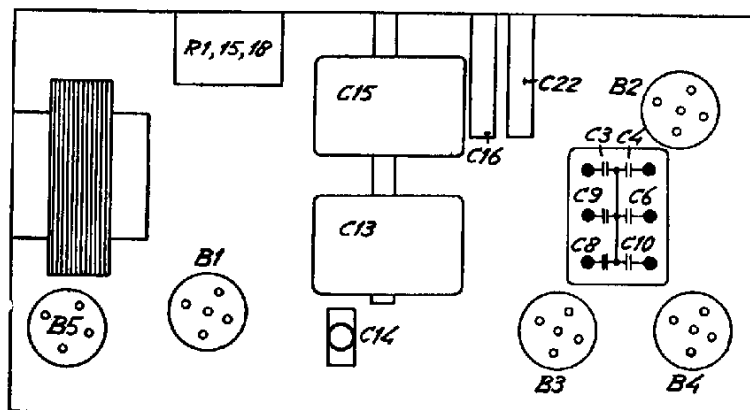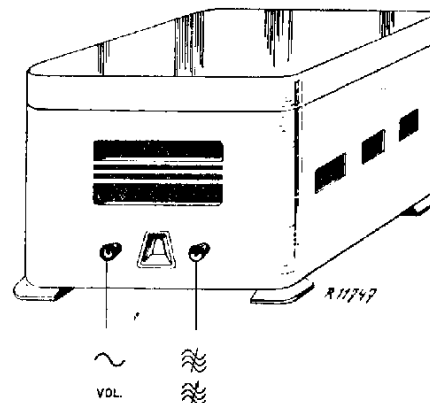


	B1	B2	B3	B4	B5	
	E 455	E 462	E 499	C 453	1823	
Va	225	225	168	215	—	V
Vg2	80	115	—	225	—	V
Ia	1,9	2,8	0,12	20	—	mA

VC2 = 225 V.

Copyright  
N.V. Philips Gloeilampenfabrieken,  
Eindhoven  
Imprimee en Hollandse

R1	1200 Ω	C1	15 μF	—
R2	39000 Ω	C2	15 μF	—
R3	68000 Ω	C3	1 μF	—
R5	27000 Ω	C4	0,25 μF	25 115 30.1
R6	0,1 MΩ	C6	0,25 μF	—
R7	0,39 MΩ	C8	0,25 μF	—
R8	2,2 MΩ	C9	0,1 μF	—
R9	0,68 MΩ	C10	0,5 μF	—
R10	680 Ω	C5	0,1 μF	48 751 10/100K
R11	18000 Ω	C7	0,1 μF	48 751 10/100K
R12	0,33 MΩ	C11	100 pF	48 429 10/100E
R13	2,2 MΩ	C12	20 pF	48 429 10/20E
R14	0,33 MΩ	C13	430 pF	—
R15	390 Ω	C14	430 pF	25 828 85.0*
R17	68000 Ω	C15	30 pF	28 212 36.4
R18	330 Ω	C16	30 pF	28 212 36.4
R19	0,68 MΩ	C17	640 pF	48 429 10/640E
R20	0,15 MΩ	C18	250 pF	48 429 10/250E
		C19	2200 pF	48 752 10/2K2
		C20	50 pF	48 429 10/50E
		C21	4700 pF	48 751 10/4K7
		C22	30 pF	28 212 36.4



A 2950  
B 2983

S1, S2, S3, S4  
S5, S6, S7  
S8, S9, S10, S11, S12  
S13, S14  
S15, S16  
S17  
S18

—  
25 960 10.0\*  
25 960 11.0\*  
25 728 26.1\*  
25 647 99.0  
25 960 78.0\*