



B1, B2




B2052T

B3



B2038

B4



B2043


# PHILIPS-SERVICE

# 870 C

200—600 m  
850—2000 m



2157  
110—220V  
65 W (220V)

200—600 m	200—600 m	850—2000 m
VOL. max 1333 kc/s—200 pF— C12, C15, max C16, C12, C15 max VOL. R2 — 2V C16, C12, C15 max	1333 kc/s—200 pF— C12, C15 max 225 m	VOL. R2 — 2V 300 kc/s—200 pF— C12, C15 1000 m C17 max

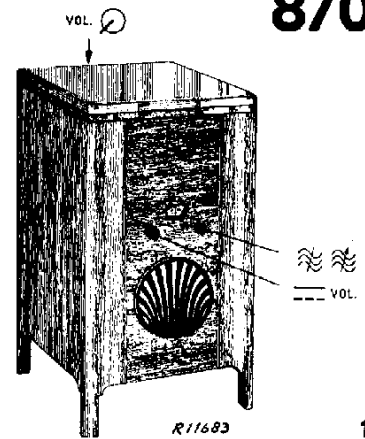

R11693

1935

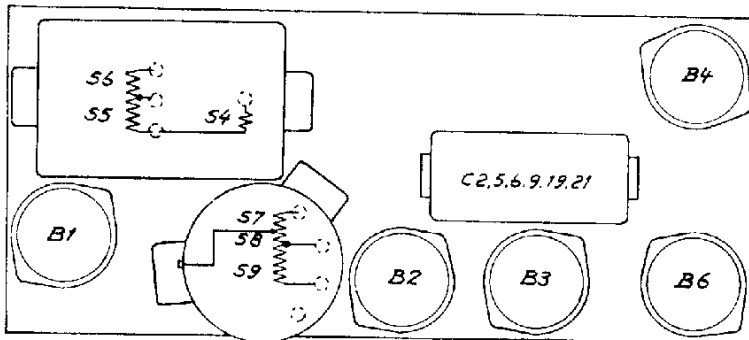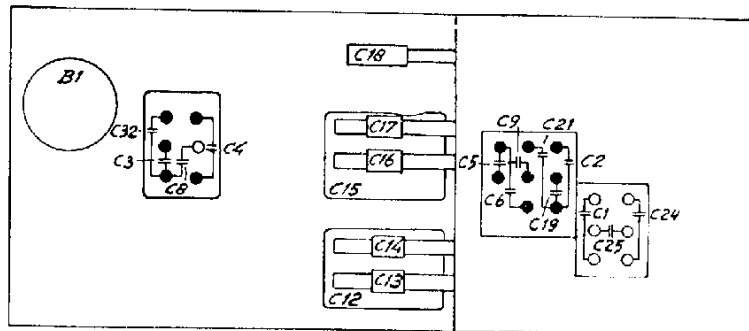

R12074

110V


	B1	B2	B3	B4	B6	
	B2052T	B2052T	B2038	B2043	1926	
Va	85	90	55	80		V
Vg2	40	65	—	85		V
Ia	1,2	1,5	2	7		mA

220V

	B1	B2	B3	B4	B6	
	B2052T	B2052T	B2038	B2043	1928	
Va	165	185	110	155		V
Vg2	85	145	—	175		V
Ia	3	3,5	5	18		mA

150V B6 = 1927

R2	3000	Ω	25 721 31.0	C1	2	μF	
R3	15000	Ω	48 427 10/15K	C24	0,2	μF	25 114 51.0*
R4	18000	Ω	48 427 10/18K	C25	0,2	μF	
R5	680	Ω	48 426 10/680E	C3	0,5	μF	
R6	15000	Ω	48 427 10/15K	C4	0,5	μF	25 114 52.0*
R7	15000	Ω	48 427 10/15K	C8	0,5	μF	
R8	0,22	MΩ	48 425 10/220K	C32	0,5	μF	
R9	470	Ω	48 426 10/470E	C2	2	μF	
R10	1	MΩ	48 426 10/1M	C5	0,5	μF	
R11	820	Ω	48 552 10/820E	C6	1	μF	25 114 53.1*
R13	0,22	MΩ	48 425 10/220K	C9	0,5	μF	
R14	680	Ω	48 426 10/680E	C19	4	μF	
R15	68000	Ω	48 427 10/68K	C21	0,5	μF	
R16	50000	Ω	—	C7	10000	pF	48 752 10/10K
				C10	1000	pF	48 429 10/1K
				C11	640	pF	48 429 10/640E
				C13	0-30	pF	28 212 36.4
				C14	0-30	pF	28 212 36.4
				C12	8-430	pF	—
				C15	8-430	pF	—
				C16	0-30	pF	28 212 36.4
				C17	0-30	pF	28 212 36.4
				C18	0-30	pF	28 212 36.4
				C20	125	pF	48 429 10/125E
				C22	22000	pF	48 750 10/22K
				C23	3200	pF	48 429 10/3K2
				C26	22000	pF	48 751 10/22K
				C27	22000	pF	48 751 10/22K
				C28	100	pF	48 429 10/100E
				C30	0-30	pF	28 212 36.4
				C31	8200	pF	48 752 10/8K2
				C33	22000	pF	48 750 10/22K
				C84	10000	pF	48 757 20/10K
				C35	10000	pF	48 757 20/10K
				C36	22000	pF	48 754 10/22K



R11389

A Garrard ED  
B 2890

S1, S2	—
S3	—
S4, S5, S6	—
S7, S8, S9	—
S10	—
S11	—
S12, S13	—
S14	—
S20	—