


C	I <sub>2</sub>	3	4	7	I <sub>7</sub>	I <sub>2</sub>	I <sub>6</sub>	I <sub>9</sub>	23	26	24	27	28	29	32	31	33	34	36	37	38	C
L		I <sub>3</sub>	4	2	7	5	6	8	9			I <sub>2</sub>	I <sub>2</sub>									L
R		2	1		5	4	6	I <sub>5</sub>	I <sub>7</sub>	8		9	I <sub>3</sub>	I <sub>2</sub>	14	I <sub>6</sub>	20	I <sub>7</sub>	I <sub>9</sub>	22		R
MISC	S <sub>1a</sub>	S <sub>1b</sub>	S <sub>1e</sub>			TR1		S <sub>1c</sub>		TR2			TR3		XI	TR4	TR5	T1	TR6	T2	S <sub>1d</sub>	MISC

B483

## MURPHY B483

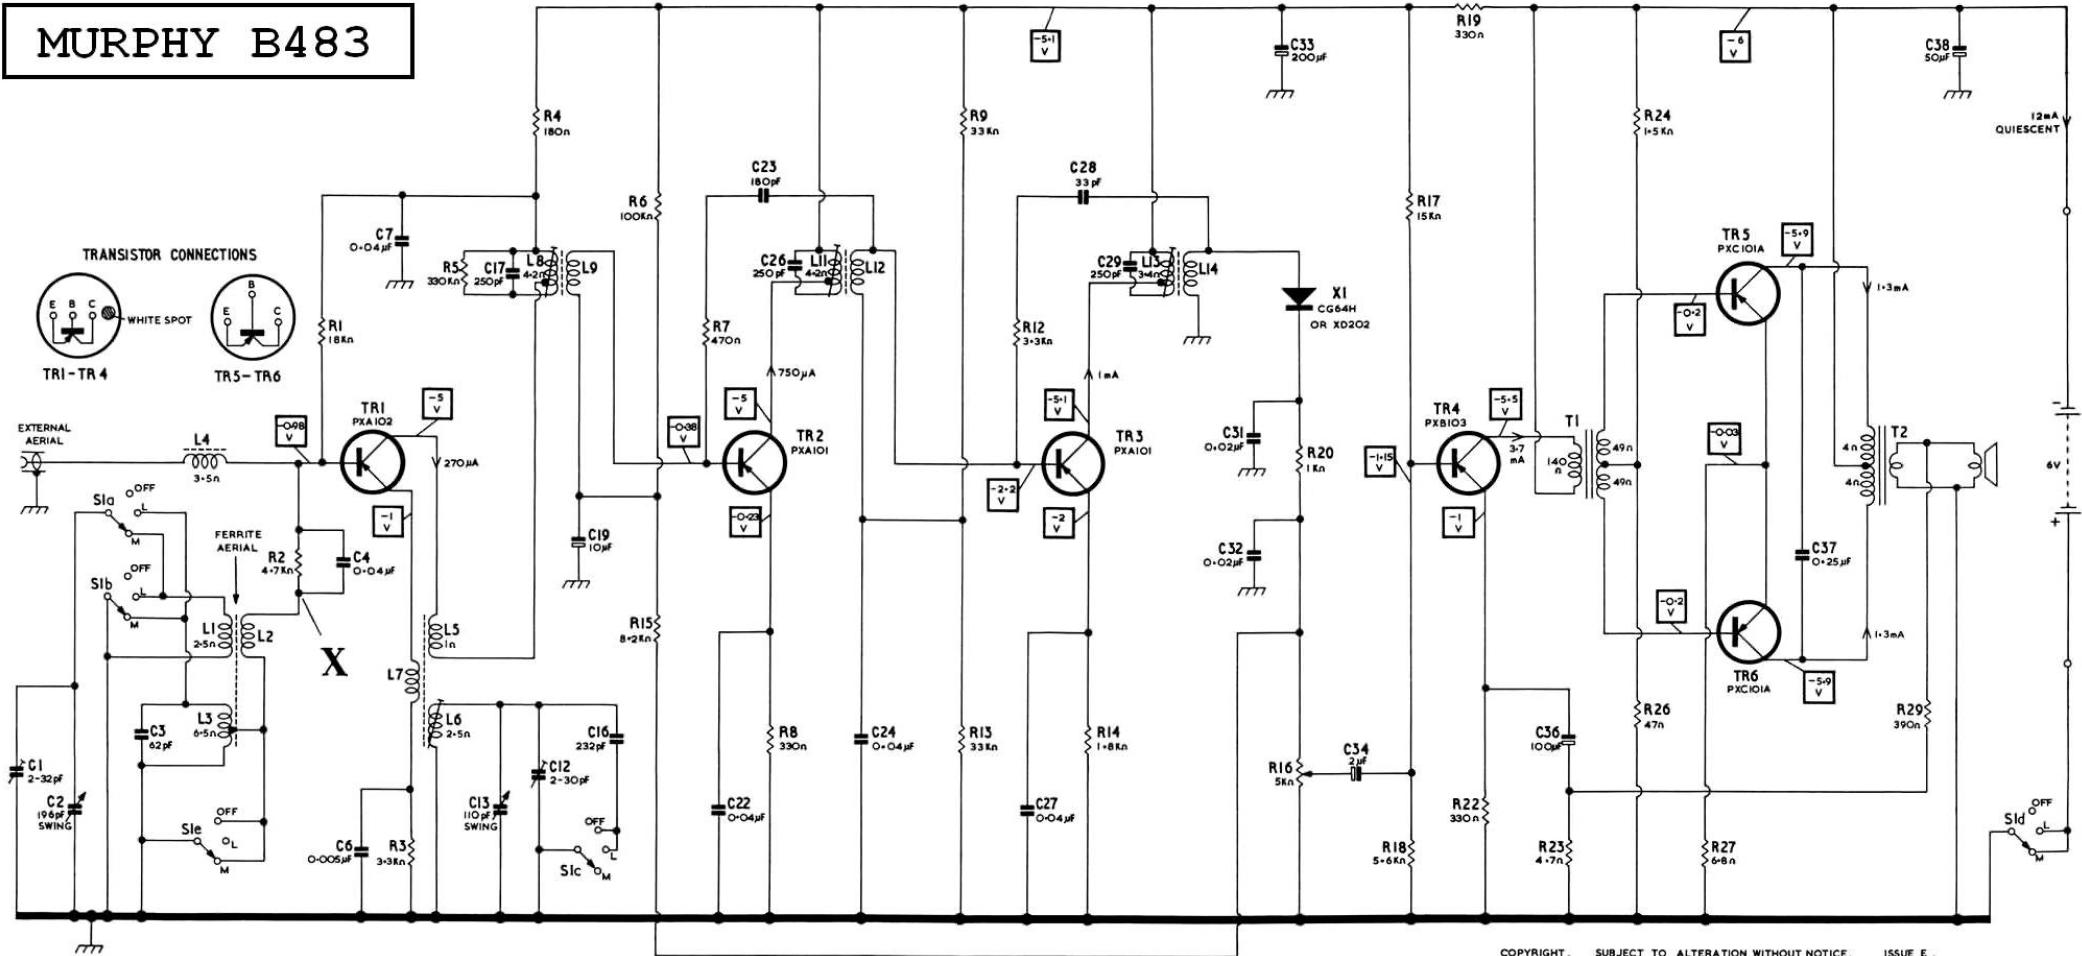

The voltage and current readings were taken under no-signal conditions with the receiver switched to M range and the Volume control at minimum, using a 20 kΩ/Vmeter. The room temperature was about 68°F.

Where the resistance of a coil is less than one ohm the value is omitted.

COPYRIGHT - SUBJECT TO ALTERATION WITHOUT NOTICE - ISSUE E -