


PHILCO

MODEL NT-1004

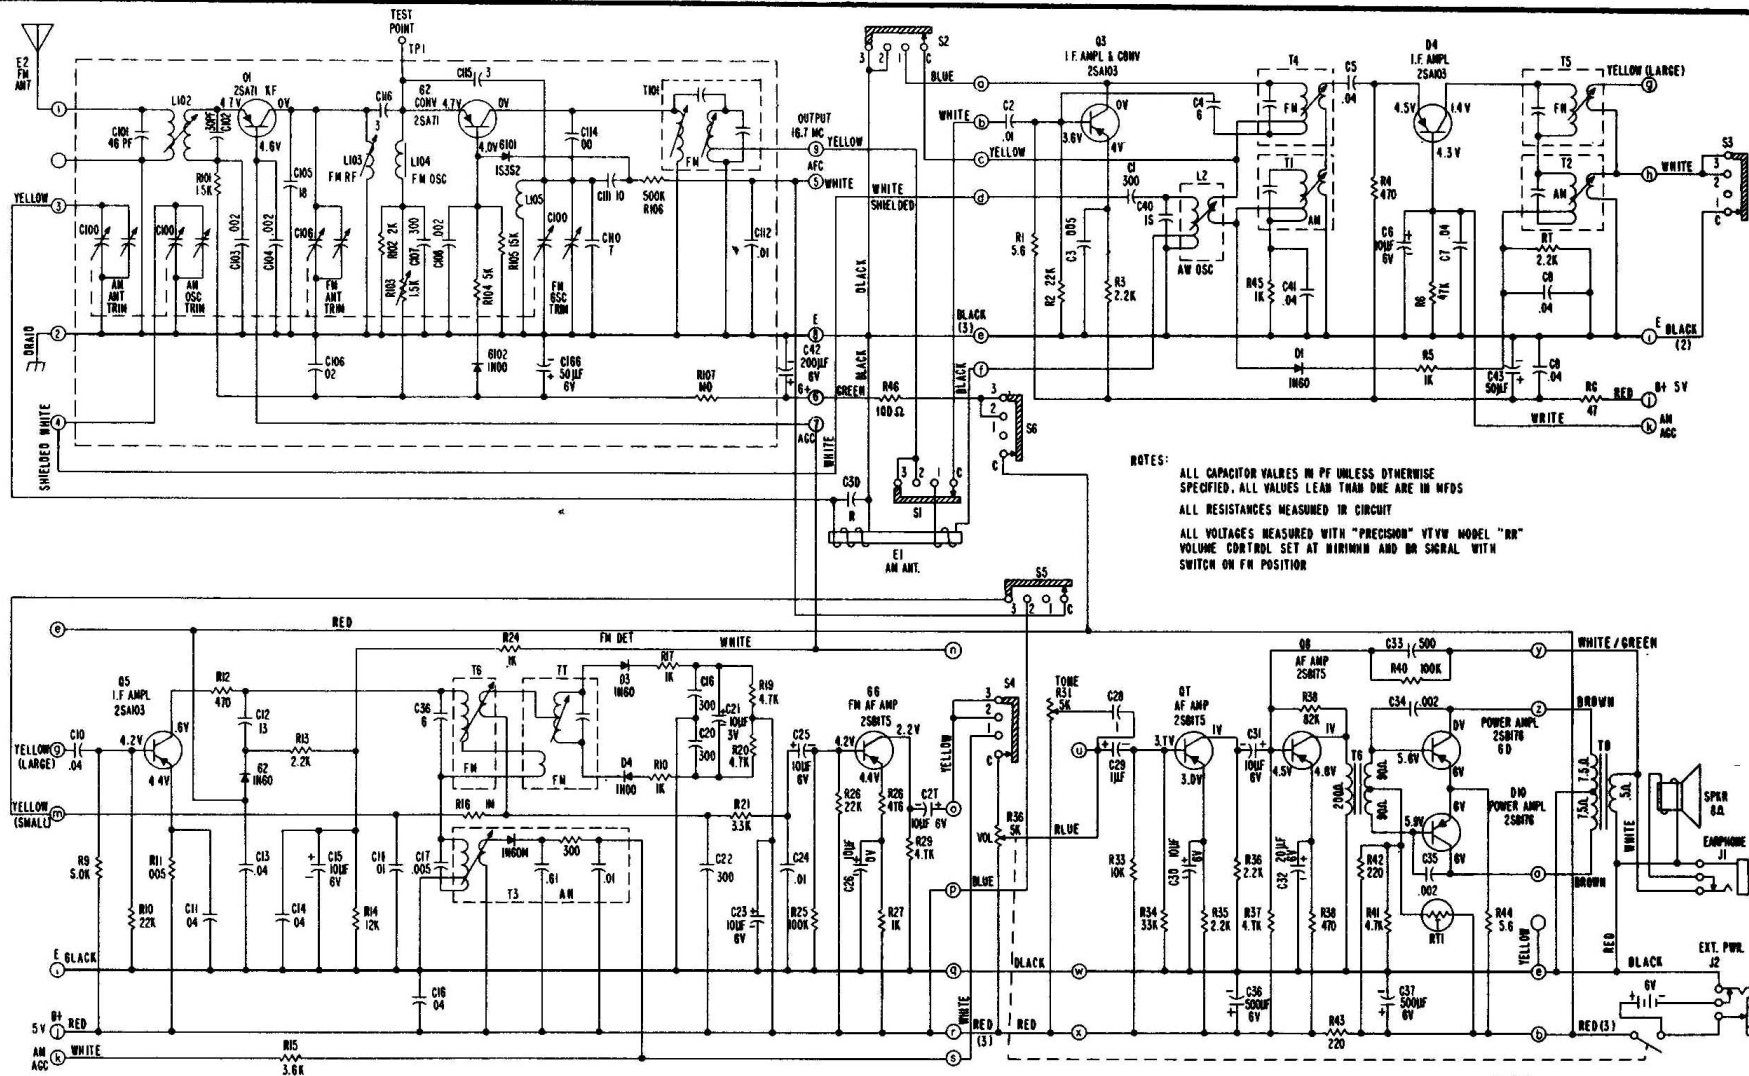


AM-FM TRANSISTOR PORTABLE—MODEL NT-1004

Chassis Removal

1. Remove Battery Sleeve with Batteries.
2. Remove 4 Screws located at each corner of chassis.
3. Remove Knobs and pull FM antenna out of cabinet and fold down.
4. Lift chassis straight up out of cabinet, now bottom sides of Perma-Circuit Panels are accessible.

Tuner Removal

1. Remove chassis from cabinet.
2. Remove Dial Cord, Tuning Sleeve and Tuning Gear Assy.
3. Unsolder all leads including grounding lug to chassis.
4. Remove three screws holding tuner to chassis frame.

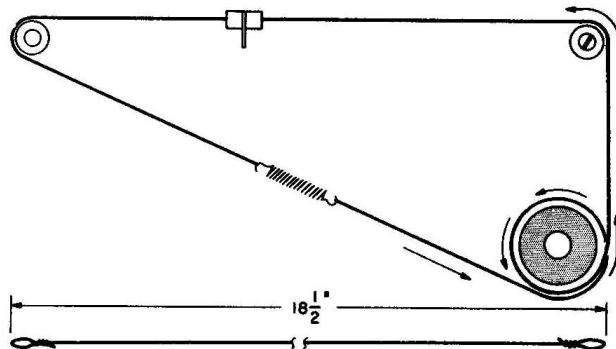

Dial Cord - Model NT1004

Bottom View - AM Conv.-FM AGC Perma-Circuit Panel

