


EF 22

ECH 21



EBL 24

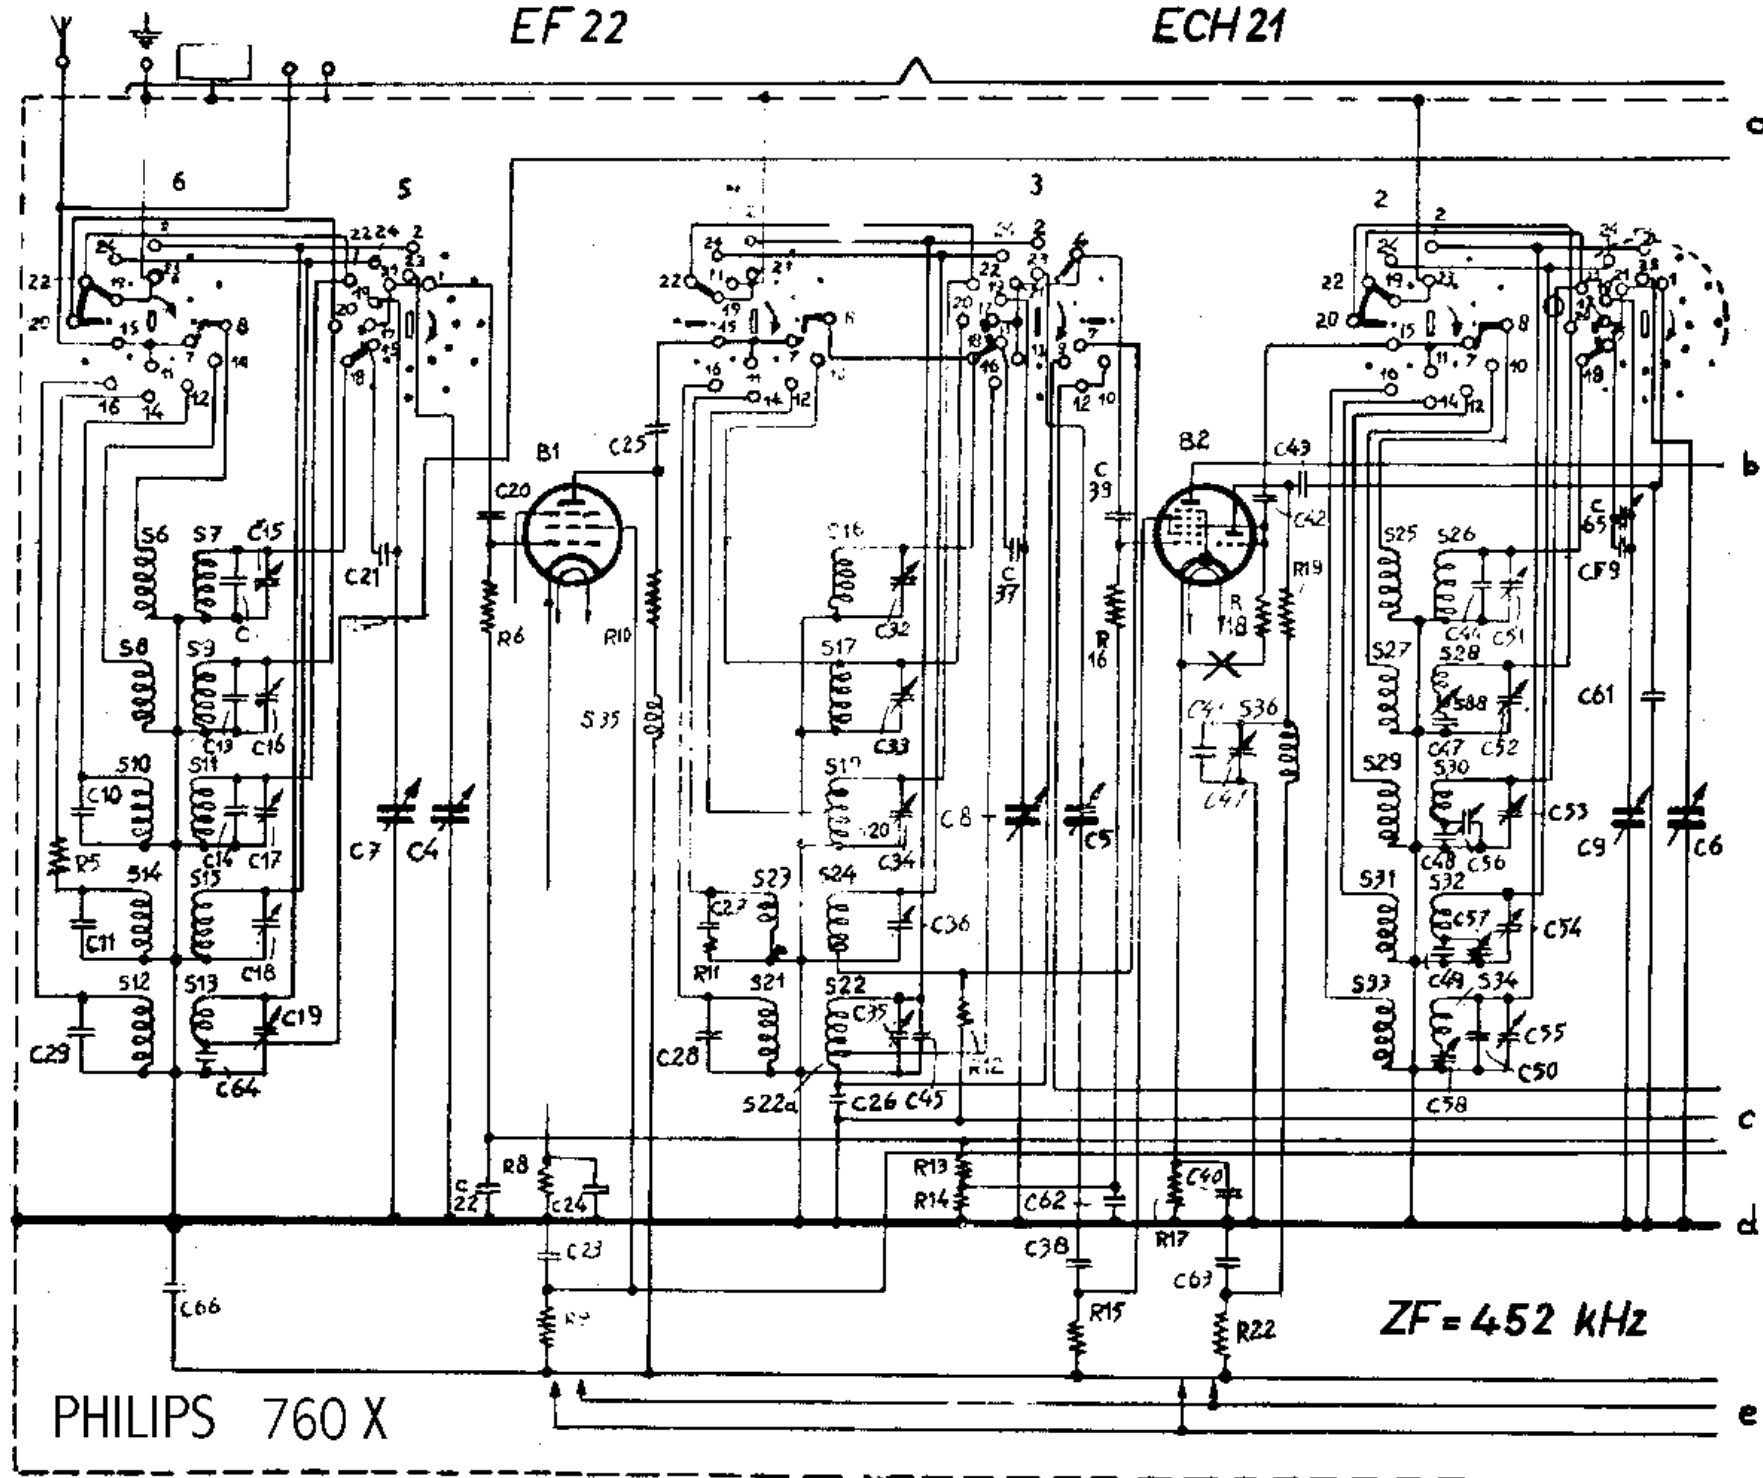

No.	Weerstand Resistance Résistance Widerstand	Codenummer Codenummer No.de code Kodenummer
S1) 220V	25 Ohm	A3 141 25.0
S2)	180 Ohm	
S3)	< 1 Ohm	
S4)	< 1 Ohm	
Z1)	< 1 Ohm	
S6)	2 Ohm	A3 120 91.0
S7) A	< 1 Ohm	
S10)	2.5 Ohm	
S11)	< 1 Ohm	
S8)	2 Ohm	A3 120 94.0
S9) B	< 1 Ohm	
S14)	18 Ohm	
S15)	6 Ohm	
S12) C	160 Ohm	A3 120 97.0
S13)	40 Ohm	
S16)	< 1 Ohm	A3 120 92.0
S19) D	< 1 Ohm	
S20)	< 1 Ohm	
S17)	< 1 Ohm	A3 120 95.0
S23) E	120 Ohm	
S24)	6 Ohm	
S21)	170 Ohm	A3 120 98.0
S22) F	27 Ohm	
S22a)	14 Ohm	
S25)	< 1 Ohm	A3 120 93.0
S26) G	< 1 Ohm	
S29)	< 1 Ohm	
S30)	1.5 Ohm	
S27)	< 1 Ohm	A3 120 96.0
S28) H	< 1 Ohm	
S31)	2 Ohm	
S32)	8 Ohm	

No.	Weerstand Resistance Résistance Widerstand	Codenummer Codenummer No.de code Kodenummer
S33) K	4 Ohm	A3 121 69.0
S34)	170 Ohm	
S35)	10 Ohm	A1 000 35.0
S36)	26 Ohm	A3 110 37.0
S37) L	6 Ohm	A3 121 00.0
S60)	102 pF	
S70)	3 Ohm	A3 121 09.0
S71)	< 1 Ohm	
S72) M	< 1 Ohm	
S73)	< 1 Ohm	
S87)	5 Ohm	A3 122 25.0
S80)	102 pF	
S74)	2 Ohm	A3 122 25.0
S75)	4 Ohm	
S76) N	4 Ohm	A1 000 68.2
S77)	4 Ohm	
S87)	102 pF	
S88)	102 pF	
S78)	95 Ohm	A1 106 21.0
S79)	200 Ohm	
S80)	230 Ohm	A3 151 13.0
S81)	230 Ohm	
S82)	< 1 Ohm	
S83)	< 1 Ohm	
S84)	20 Ohm	
S85)	20 Ohm	
S88	lus - loop - boucle - Schlinge	

X Seleen)
Selenium) Diode A2 900 01.8
Selen)

WEERSTANDEN - RESISTORS - RESISTANCES
WIDERSTÄNDE

No.	Waarde Value Valeur Wert	Codenummer Codenummer No.de code Kodenummer
R1	1000 Ohm	48 468 10/1K
R5	470 Ohm	48 425 10/470E
R6	0.82 M.Ohm	48 425 10/820K
R7	3300 Ohm	48 427 10/3K3
R8	330 Ohm	48 428 10/330E
R9	82000 Ohm	48 427 10/82K
R10	10000 Ohm	48 427 10/10K
R11	1000 Ohm	48 425 10/1K
R12	47 Ohm	48 425 10/47E
R13	1 M.Ohm	48 426 10/1M
R14	1 M.Ohm	48 426 10/1M
R15 par.	39000 Ohm	48 427 10/39K
	68000 Ohm	48 427 10/68K
R16	0.82 M.Ohm	48 425 10/820K
R17	180 Ohm	48 426 10/180E
R18	47000 Ohm	48 425 10/47K
R19	15000 Ohm	48 427 10/15K
R22	6800 Ohm	48 428 10/68K
R41	470 Ohm	48 426 10/47E
R42	330 Ohm	48 428 10/330E
R43	56000 Ohm	48 426 10/56K
R44	1.5 M.Ohm	48 426 10/1M5
R45	3300 Ohm	48 425 10/3K3
R46	47000 Ohm 1)	48 425 10/47K
R47	0.68 M.Ohm	48 425 10/680K
R48	0.33 M.Ohm	48 425 10/330K
R49	0.33 M.Ohm 3)	48 427 10/330K
R50	0.1 M.Ohm 3)	48 425 10/100K
R51	1.5 M.Ohm 3)	48 426 10/1M5

No.	Waarde Value Valeur Wert	Codenummer Codenummer No.de code Kodenummer
R52	0.1 M.Ohm	48 425 10/100K
R53	0.65 M.Ohm	49 472 39.0
R54	0.2 M.Ohm	49 475 00.0
R55	2 M.Ohm	
R56	0.2 M.Ohm	48 425 10/27E
R57	27000 Ohm	
R58	18000 Ohm 1)	48 425 10/18K
R59	0.47 M.Ohm 1)	48 425 10/470K
R60	0.47 M.Ohm 1)	48 425 10/470K
R61	680 Ohm	48 426 10/680E
R62	0.68 M.Ohm	48 426 10/680K
R63	0.27 M.Ohm 1)	48 426 10/270K
R64	1.5 M.Ohm 1)	48 426 10/1M5
R65	1 M.Ohm	48 426 10/1M
R66	1 M.Ohm	48 426 10/1M
R67	100 Ohm	48 425 10/100E
R68	100 Ohm 3)	48 425 10/100E
R69	39000 Ohm 3)	48 425 10/39K
R70	0.39 M.Ohm 3)	48 426 10/390K
R71	0.47 M.Ohm 2)	48 425 10/470K
R72	0.18 M.Ohm 2)	48 425 10/180K
R73	5.3 M.Ohm 1)	48 427 10/5M3
R74	0.47 M.Ohm 2)	48 425 10/470K
R75	0.1 M.Ohm 2)	48 425 10/100K
R76	0.33 M.Ohm 2)	48 425 10/330K
R77	0.22 M.Ohm 2)	48 425 10/220K
R78	1500 Ohm 3)	48 425 10/1K5
R79	680 Ohm 1)	48 426 10/680E
R80	33000 Ohm 3)	48 425 10/33K

1) Unit I
2) Unit II
3) Unit III

PHILIPS 760 X

R81	0.18 M.Ohm 2)	48 425 10/180K
R82	560 Ohm 2)	48 426 10/560E
R83	560 Ohm 2)	48 426 10/560E
R84	0.56 M.Ohm 2)	48 425 10/560K
R85	56000 Ohm	48 425 10/56K
R86	1.5 M.Ohm 2)	48 426 10/1M5
R87	0.22 M.Ohm	48 425 10/220K
R88	0.1 M.Ohm	48 427 10/100K
R89	0.68 M.Ohm 2)	48 425 10/680K
R90	0.82 M.Ohm 2)	48 425 10/820K
R91	82000 Ohm	48 427 10/82K
R92	82000 Ohm	48 427 10/82K
R93	0.68 M.Ohm 3)	48 425 10/680K
R94	0.68 M.Ohm 3)	48 425 10/680K
R95	1000 Ohm 3)	48 425 10/1K

R96	1000 Ohm 3)	48 425 10/1K
R97	56000 Ohm	48 426 10/56K
R98	47000 Ohm	48 426 10/47K
R99	10M. Ohm	48 427 10/10M
R100	0.18 M.Ohm 3)	48 425 10/180K
R101	1 M.Ohm	48 426 10/1M
R102	180 Ohm 2)	48 427 10/180E
R102a	220 Ohm 2)	48 427 10/220E
R103	1 M.Ohm	48 426 10/1M
R104	0.68 M.Ohm	48 425 10/680K
R105	1000 Ohm	48 425 10/1K
R106	1000 Ohm	48 425 10/1K
R107	1500 Ohm	48 425 10/1K5
R108	36 Ohm	48 516 10/36E
R109	1.5 M.Ohm	48 426 10/1M5

CONDENSATOREN - CAPACITORS - CONDENSATEURS
KONDENSATOREN

No.	Waarde Value Valeur Wert	Codenummer Codenummer No. de code Kodenummer
C1	50 uF	48 312 09/50
C2	50 uF)	
C3	50 uF)	48 317 09/50+50
C4	11-490 pF)	
C5	11-490 pF)	
C6	11-490 pF)	A9 863 11.0
C7	0-120 pF	
C8	0-120 pF	
C9	0-120 pF	
C10	56 pF	48 408 10/56E
C11	47 pF	48 408 20/47E
C12	15 pF	48 406 20/15E
C13	15 pF	48 406 20/15E
C14	15 pF	48 406 20/15E
C15	30 pF	28 212 36.3
C16	30 pF	28 212 36.3
C17	30 pF	28 212 36.3
C18	30 pF	28 212 36.3
C19	30 pF	28 212 36.3
C20	180 pF	48 408 10/180E
C21	360 pF	48 429 01/360E
C22	22000 pF	48 750 20/22K
C23	47000 pF	48 751 20/47K
C24	47000 pF	48 750 20/47K
C25	220 pF	48 408 10/220E
C26	6800 pF	48 750 10/68K
C27	150 pF	48 408 10/150E
C28	200 pF	48 408 10/200E
C29	50 pF	48 408 20/50E
C32	30 pF	28 212 36.3
C33	30 pF	28 212 36.3
C34	30 pF	28 212 36.3
C35	30 pF	28 212 36.3
C36	30 pF	28 212 36.3
C37	360 pF	48 429 01/360E
C38	47000 pF	48 751 20/47K
C39	180 pF	48 408 10/180E
C40	47000 pF	48 750 20/47K
C41	52 pF	28 212 06.2
C42	82 pF	48 408 10/82E
C43	470 pF	48 408 10/470E
C44	15 pF	48 429 10/15E
C45	15 pF	48 406 10/15E
C46	12 pF	48 406 10/12E
C47	3000 pF	48 429 01/3K
C48	2100 pF	48 429 95/2K1
C49	390 pF	48 429 10/390E
C50	27 pF	48 406 10/27E
C51	30 pF	28 212 36.3
C52	30 pF	28 212 36.3
C53	30 pF	28 212 36.3
C54	30 pF	28 212 36.3
C55	30 pF	28 212 36.3
C56	200 pF	28 212 08.2
C57	200 pF	28 212 08.2

No.	Waarde Value Valeur Wert	Codenummer Codenummer No. de code Kodenummer
C58	200 pF	28 212 08.2
C59	340 pF	48 429 01/340E
C60	102 pF	
C61	Temp. compensator	49 005.13.0
C62	22000 pF	48 750 20/22K
C63	47000 pF	48 751 20/47K
C64	6800 pF	48 750 10/68K
C65	30 pF	49 005 00.0
C66	22000 pF	48 751 20/22K
C67	6800 pF	48 751 20/68K
C80	102 pF	
C83	68000 pF	48 750 20/68K
C84	18 pF	48 406 10/18E
C85	47000 pF	48 751 20/47K
C86	47000 pF	48 750 20/47K
C87	102 pF	
C88	102 pF	
C89	47000 pF	48 750 20/47K
C90	47 pF	48 406 10/47E
C91	68000 pF	48 750 20/68K
C92	10000 pF	48 750 10/10K
C93	10000 pF	48 750 20/10K
C94	560 pF	48 406 10/560E
C95	18000 pF	48 750 10/18K
C96	22000 pF	48 750 20/22K
C97	0.22 uF	48 750 20/220K
C98	56 pF	48 406 10/56E
C99	68 pF	49 055 91.0
C100	0.1 uF	48 750 20/100K
C101	10000 pF	48 751 10/10K
C102	8.2 pF	48 406 99/8E2
C103	0.1 uF	48 750 20/100K
C104	0.1 uF	48 750 20/100K
C105	0.47 uF	48 750 20/470K
C106	100 pF	28 185 68.0
C107	22000 pF	48 750 20/22K
C108	0.22 uF	48 750 20/220K
C109	0.1 uF	48 750 20/100K
C110	5600 pF	48 751 10/56K
C111	5600 pF	48 751 10/56K
C112	5600 pF	48 751 10/56K
C113	5600 pF	48 751 10/56K
C114	47000 pF	48 752 20/47K
C115	27000 pF	48 750 10/27K
C116	1000 pF	48 758 20/1K
C117	1000 pF	48 758 20/1K
C118	2200 pF	48 751 20/22K
C119	10000 pF	48 750 20/10K
C120	100 pF	48 406 20/100E
C121	10000 pF	48 750 20/10K
C130	82000 pF	48 757 20/82K
C139	22000 pF	48 756 20/22K
C131	82000 pF	48 757 20/82K

PHILIPS 760 X

1) Unit I
2) Unit II
3) Unit III

a) EX7601
b) EX760A