



SONY

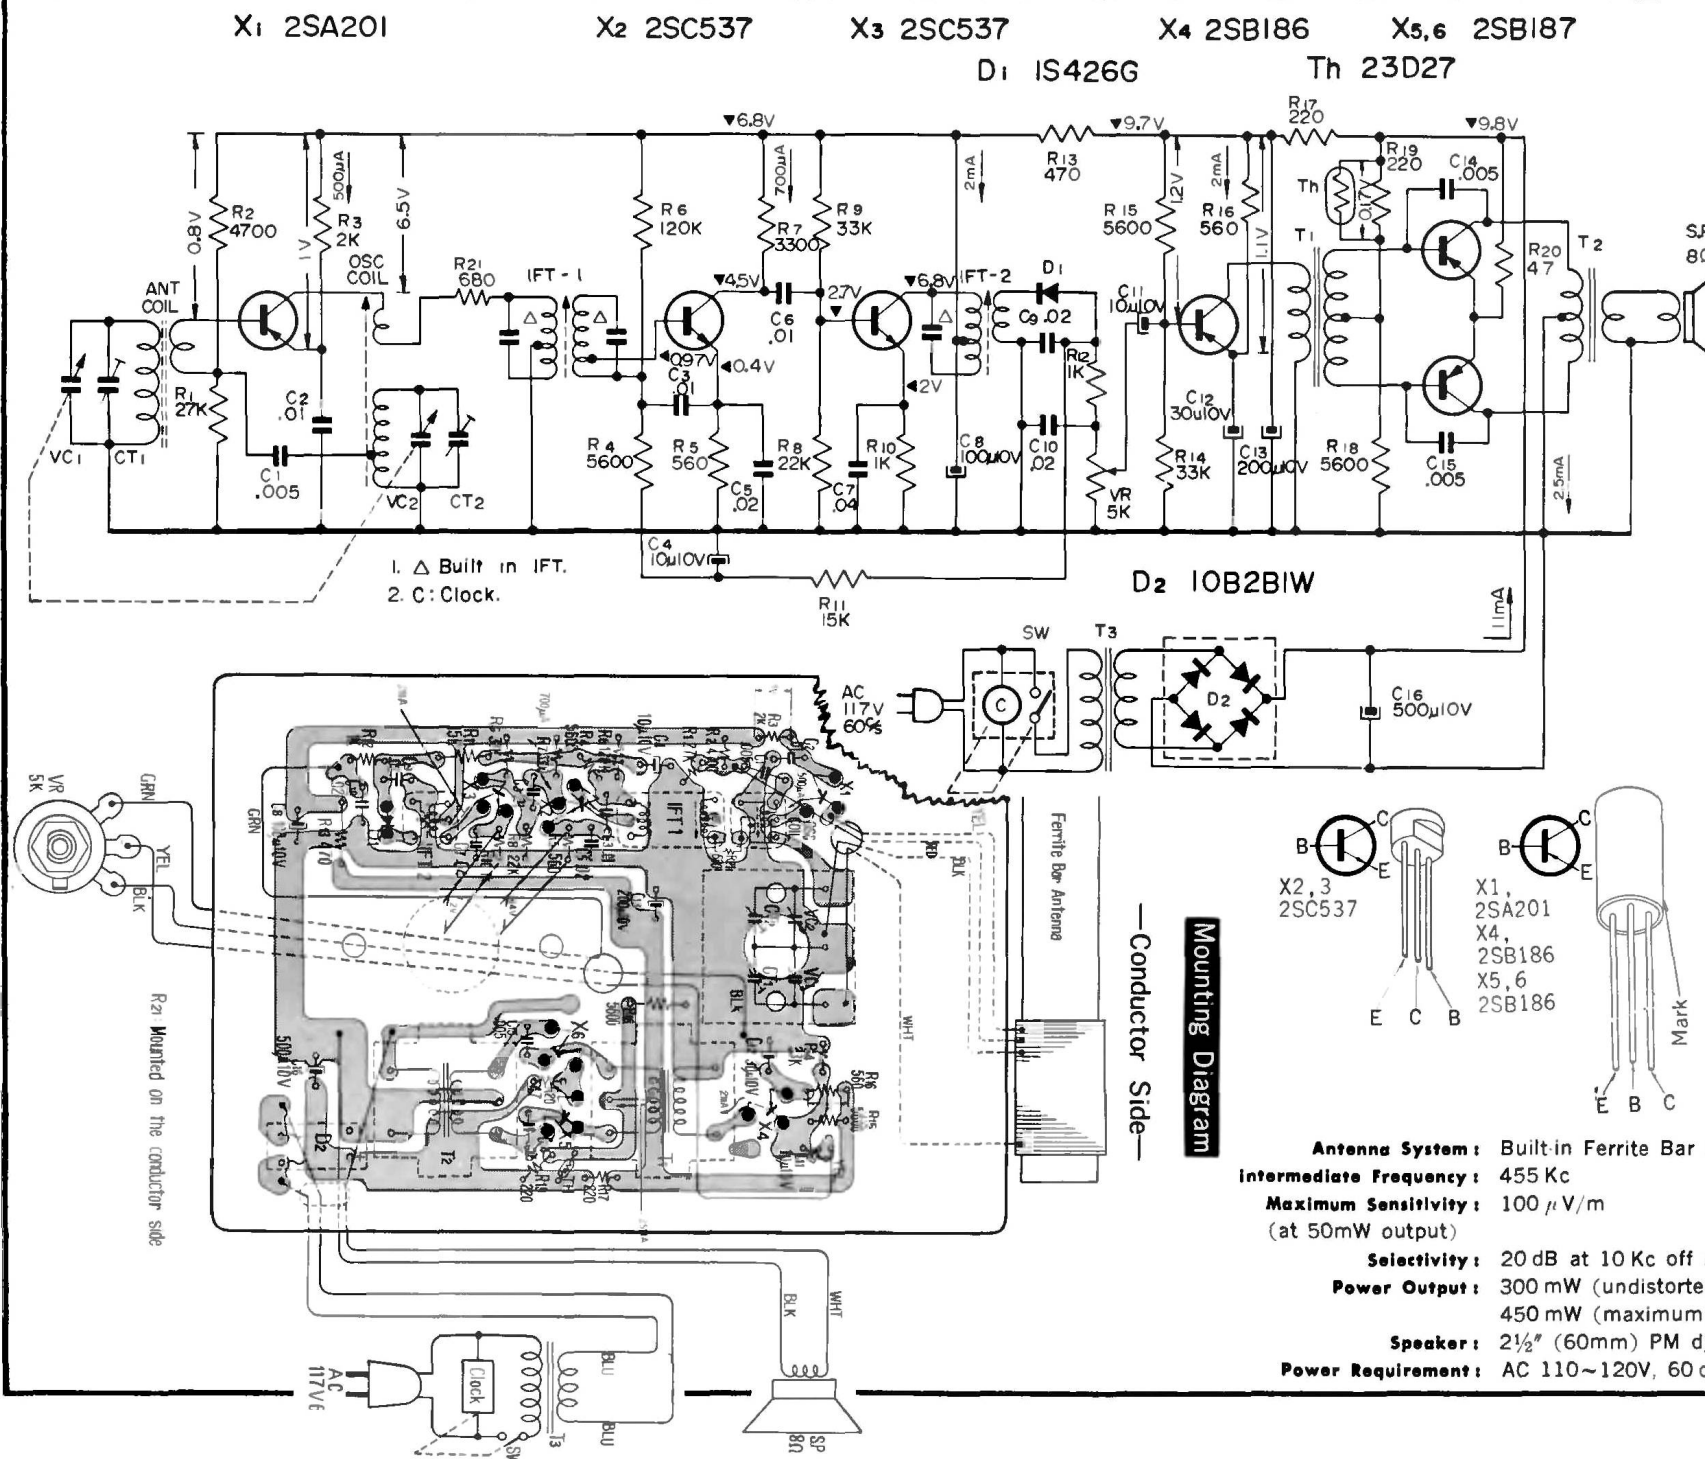

Mounting Diagram

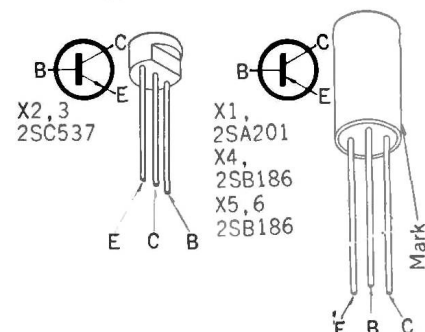

Antenna System: Built-in Ferrite Bar Antenna
Intermediate Frequency: 455 Kc
Maximum Sensitivity: 100 μ V/m
 (at 50mW output)
Selectivity: 20 dB at 10 Kc off resonance, at 1,400 Kc
Power Output: 300 mW (undistorted)
 450 mW (maximum)
Speaker: 2½" (60mm) PM dynamic, impedance 8 Ω
Power Requirement: AC 110~120V, 60 c/s, 5 W