

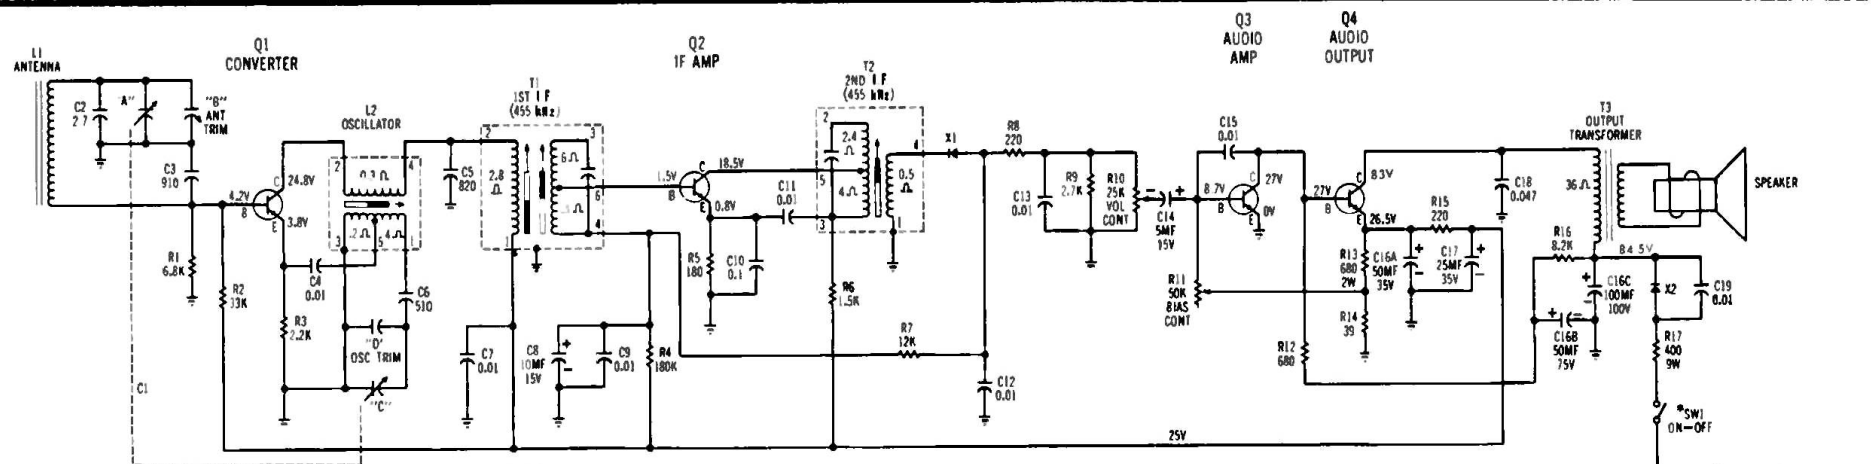
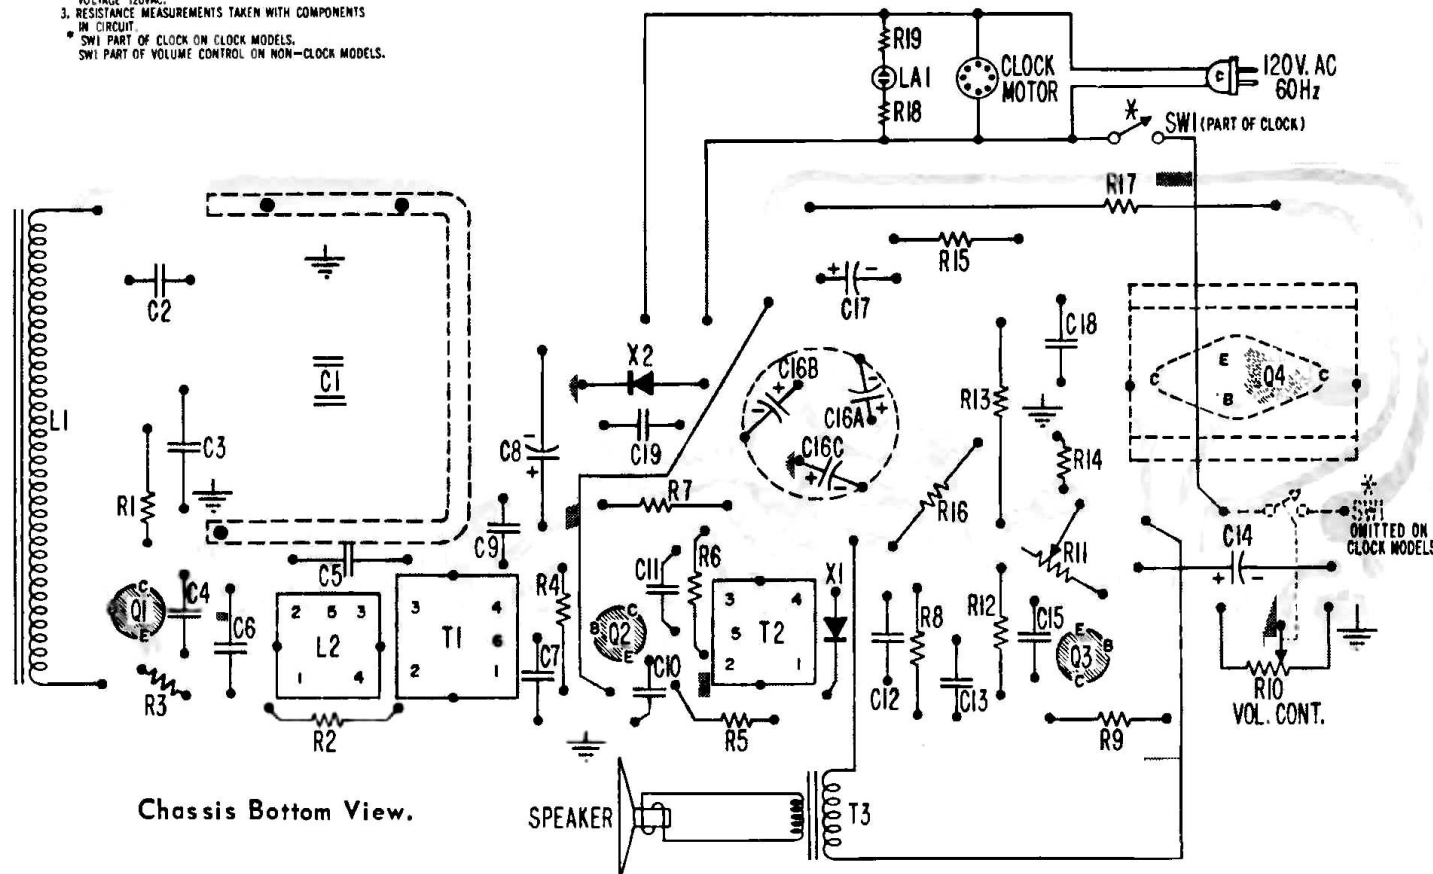



WESTINGHOUSE Models RLA1010A, 1010B, 1011A, 1011B, 1020A, 1020B, 1021A, 1021B, 1100B, 1110B, 1120A, RTA3010A, 3010B; Chassis V-2576

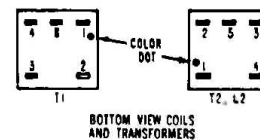

- NOTES:
 1. ALL CAPACITANCE VALUES LESS THAN ONE ARE IN MF (MICROFARADS) AND VALUES GREATER THAN ONE ARE IN PF (PICOFARADS).
 ALL RESISTANCE VALUES ARE IN OHMS, 1/2 WATT.
 2. VOLTAGE MEASUREMENTS MADE WITH A VTVM FROM POINTS INDICATED TO GROUND, WITH TUNING CAPACITOR AT MAXIMUM, VOLUME CONTROL AT MINIMUM (NO SIGNAL INPUT) LINE VOLTAGE 120VAC.
 3. RESISTANCE MEASUREMENTS TAKEN WITH COMPONENTS IN CIRCUIT.
 * SW1 PART OF CLOCK ON CLOCK MODELS.
 SW1 PART OF VOLUME CONTROL ON NON-CLOCK MODELS.

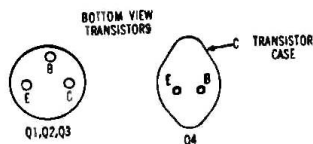

Chassis Bottom View.

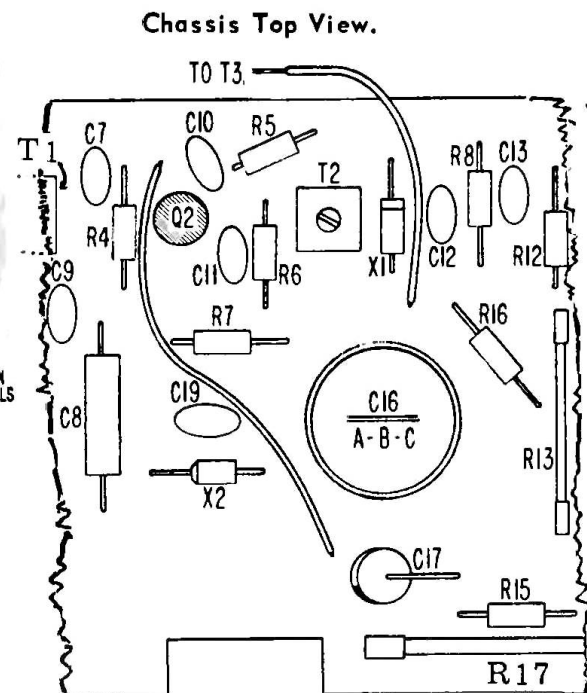

Chassis Top View.