



AZ1

ECH 21

ECH 21

EM 4

EBL 21

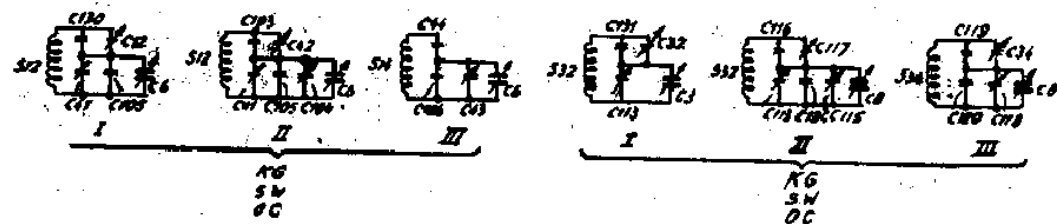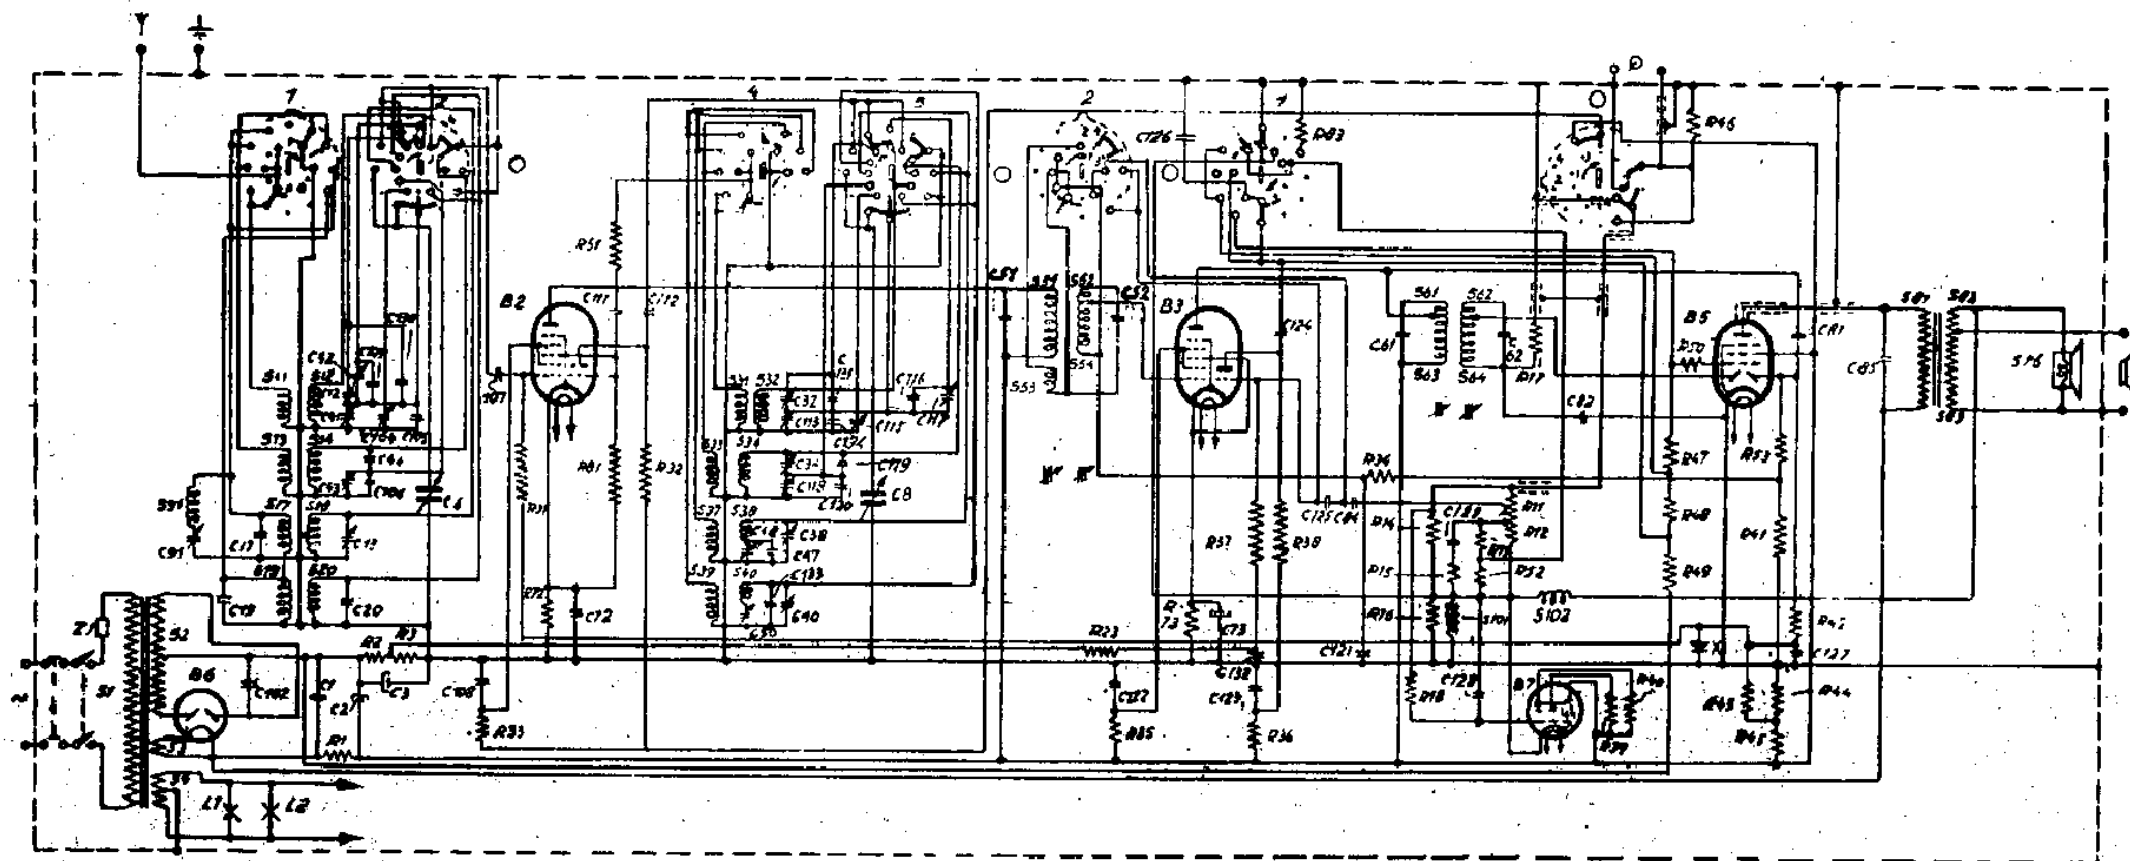

ZF = 452 kHz

SIERA 196 X

ROBINES

No.	Résistance	No. de code	Prix
S1	66 Ohm	A3 141 11.0	
S2	310 Ohm		
S3	<1 Ohm		
S4	<1 Ohm		
Z1	<1 Ohm		
S11	2.1 Ohm	A3 110 07.0	
S12	<1 Ohm		
S13	2.1 Ohm		
S14	<1 Ohm		
S17	59 Ohm	A3 120 37.0	
S18	1.5 Ohm		
S19	<1 Ohm		
S20	44 Ohm		
S31	<1 Ohm	A3 120 36.0	
S32	<1 Ohm		
S33	<1 Ohm		
S34	<1 Ohm		
S37	2.1 Ohm	A3 121 27.0	
S38	7.4 Ohm		
S39	3.7 Ohm		
S40	17.5 Ohm		
S51	18.9 Ohm	A3 120 35.1	
S52	7.9 Ohm		
S53	<1 Ohm		
S54	7.9 Ohm		
C51	102 pF	A3 120 34.1	
C52	102 pF		
S61	7.9 Ohm		
S62	6.8 Ohm		
C61	102 pF	A3 151 01.0	
C62	102 pF		
S81	650 Ohm		
S82	<1 Ohm		
S83	<1 Ohm	A3 110 09.0	
S91	18 Ohm		
S101	158 Ohm		
S102	2.1 Ohm	A3 110 08.0	
X	Diode de sélénium Pov. 245 V	A2 900 01.3	

COURANTS ET TENSIONS

		Va	Vg2 (+4)	Vk	Ia	Ig2 (+4)
B2	Heptode	235	100	2.3	4.3	4.8
	Triode	125			7.5	
B3	Heptode	235	115		5.8	3.2
	Triode	55			1.1	
B5	Pentode	240	235		30	3.8
		VL	Va2d2	Vg1 (1)	Ia	
B7	Indicateur	235	23	28	3.4	

VL = tension pour l'anode fluorescente.

VC1 = 270 V.

VC2 = 245 V.

Le courant de tension est 225 mA h 220 V.ilt.

CONDENSATEURS

No.	Valeur	No. de code	Prix
C1	50 pF	19 031 10.2	
C2	30 pF		
C3	100 pF	28 185 68.1	
C6	11—390 pF	19 001 20.0	
C8	11—390 pF		
C12	30 pF	28 212 36.3	
C17	39 pF	48 408 10 39E	
C18	30 pF	28 212 36.3	
C19	39 pF	48 408 10 39E	
C20	8.2 pF	48 406 99 8E2	
C32	30 pF	28 212 36.3	
C34	30 pF	28 212 36.3	
C38	30 pF	28 212 36.3	
C40	30 pF	28 212 36.3	
C41	30 pF	28 212 36.3	
C42	30 pF	28 212 36.3	
C43	30 pF	28 212 36.3	
C44	625 pF	48 406 01/625E	
C47	330 pF	48 408 10/330E	
C48	125 pF	28 212 07.2	
C50	200 pF	28 212 08.2	
C51	102 pF	voir „Robines“	
C52	102 pF	voir „Robines“	
C61	102 pF	voir „Robines“	
C62	102 pF	voir „Robines“	
C72	17000 pF	48 750 20/47K	
C73	100 pF	28 185 68.1	
C81	27 pF	48 408 10/27E	
C82	47 pF	48 408 10/47E	
C84	10000 pF	48 750 10/10K	
C85	1000 pF	48 757 20/2K2	
C91	30 pF	28 212 36.3	
C102	22000 pF	48 756 20/22K	
C103	276 pF	48 406 02/276E	
C104	30 pF	28 212 36.3	
C105	15 pF	48 406 10/15E	
C106	85 pF	48 406 02/85E	
C107	220 pF	48 408 20/220E	
C108	47000 pF	48 751 20/47K	
C111	120 pF	48 408 10/120E	
C112	470 pF	48 408 20/470E	
C113	30 pF	28 212 36.3	
C115	30 pF	28 212 36.3	
C116	276 pF	48 406 02/276E	
C117	30 pF	28 212 36.3	
C118	30 pF	28 212 36.3	
C119	540 pF	48 406 01/540E	
C120	85 pF	48 406 02/85E	
C121	47000 pF	48 750 20/47K	
C122	47000 pF	48 751 20/47K	
C123	0.1 pF	48 751 20/100K	
C124	22000 pF	48 751 10/22K	
C125	120 pF	48 408 10/120E	
C126	1500 pF	48 751 20/1K5	
C127	47000 pF	48 750 20/47K	
C128	33000 pF	48 750 20/33K	
C129	22000 pF	48 750 10/22K	
C130	47 pF	48 408 10/47E	
C131	56 pF	48 406 10/56E	
C132	47000 pF	48 750 20/47K	
C133	18 pF	48 406 10/18E	
C134	8.2 pF	48 406 99/8E2	

SIERA 196 X

RESISTANCES

No.	Valeur	No. de code	Prix	No.	Valeur	No. de code	Prix
R1	1200 Ω	48 468 10/1K2		R37	2.2 M. Ω	48 427 10/2M2	
R2	82 Ω	48 426 05/82E		R38	0.1 M. Ω	48 426 10/100K	
R3	18 Ω	48 425 10/18E		R39	1 M. Ω	48 426 10/1M	
R11	0.65 M. Ω	49 470 32.0		R40	1 M. Ω	48 426 10/1M	
R12	0.05 M. Ω			R41	0.82 M. Ω	48 425 10/820K	
R13	27000 Ω	48 425 05/27K		R12	1.2 M. Ω	48 426 10/1M2	
R14	0.82 M. Ω	48 425 10/820K		R43	10 M. Ω	48 427 10/10M	
R15	10000 Ω	48 425 10/10K		R44	0.39 M. Ω	48 425 10/390K	
R16	47 Ω	48 425 05/47E		R45	0.82 M. Ω	48 425 10/820K	
R17	0.1 M. Ω	48 425 10/100K		R46	0.22 M. Ω	48 425 10/220K	
R18	2.2 M. Ω	48 427 10/2M2		R17	0.1 M. Ω	48 425 10/100K	
R23	0.17 M. Ω	48 425 10/470K		R48	68000 Ω	48 425 10 68K	
R31	1.5 M. Ω	48 426 10 1M5		R19	0.39 M. Ω	48 425 10 390K	
R32	22000 Ω	48 427 10 22K		R50	1000 Ω	48 425 10 1K	
R33	68000 Ω	48 426 10 68K		R51	120 Ω	48 425 10 120E	
R33a	39000 Ω	48 427 10 39K		R52	27000 Ω	48 425 05 27K	
R34	1.5 M. Ω	48 426 10 1M5		R53	0.27 M. Ω	48 425 10 270K	
R35	17000 Ω	48 427 10 17K		R54	1800 Ω	48 425 10 1K8	
R36	56000 Ω	48 425 10 56K		R72	220 Ω	48 426 10 220E	
				R73	150 Ω	48 426 10 150E	
				R81	47000 Ω	48 425 10 47K	
				R84	22 Ω	48 425 10 22E	