



5 12 19 13 14 18 20	100 37 39 33 34 38 40	51 52	53 54	61 62 63 64	81	82	76
C 19 100 112 20	18 6 130 101 105	110 1 103 102 8 2	48 50 38 40 34 51	38 104 52	61	113 108 62 107 83 109 75 85	
R 41 37	38 30 31 39	31 40 41 39	81 32 1	40	33	43	12 11 34 35 36 75

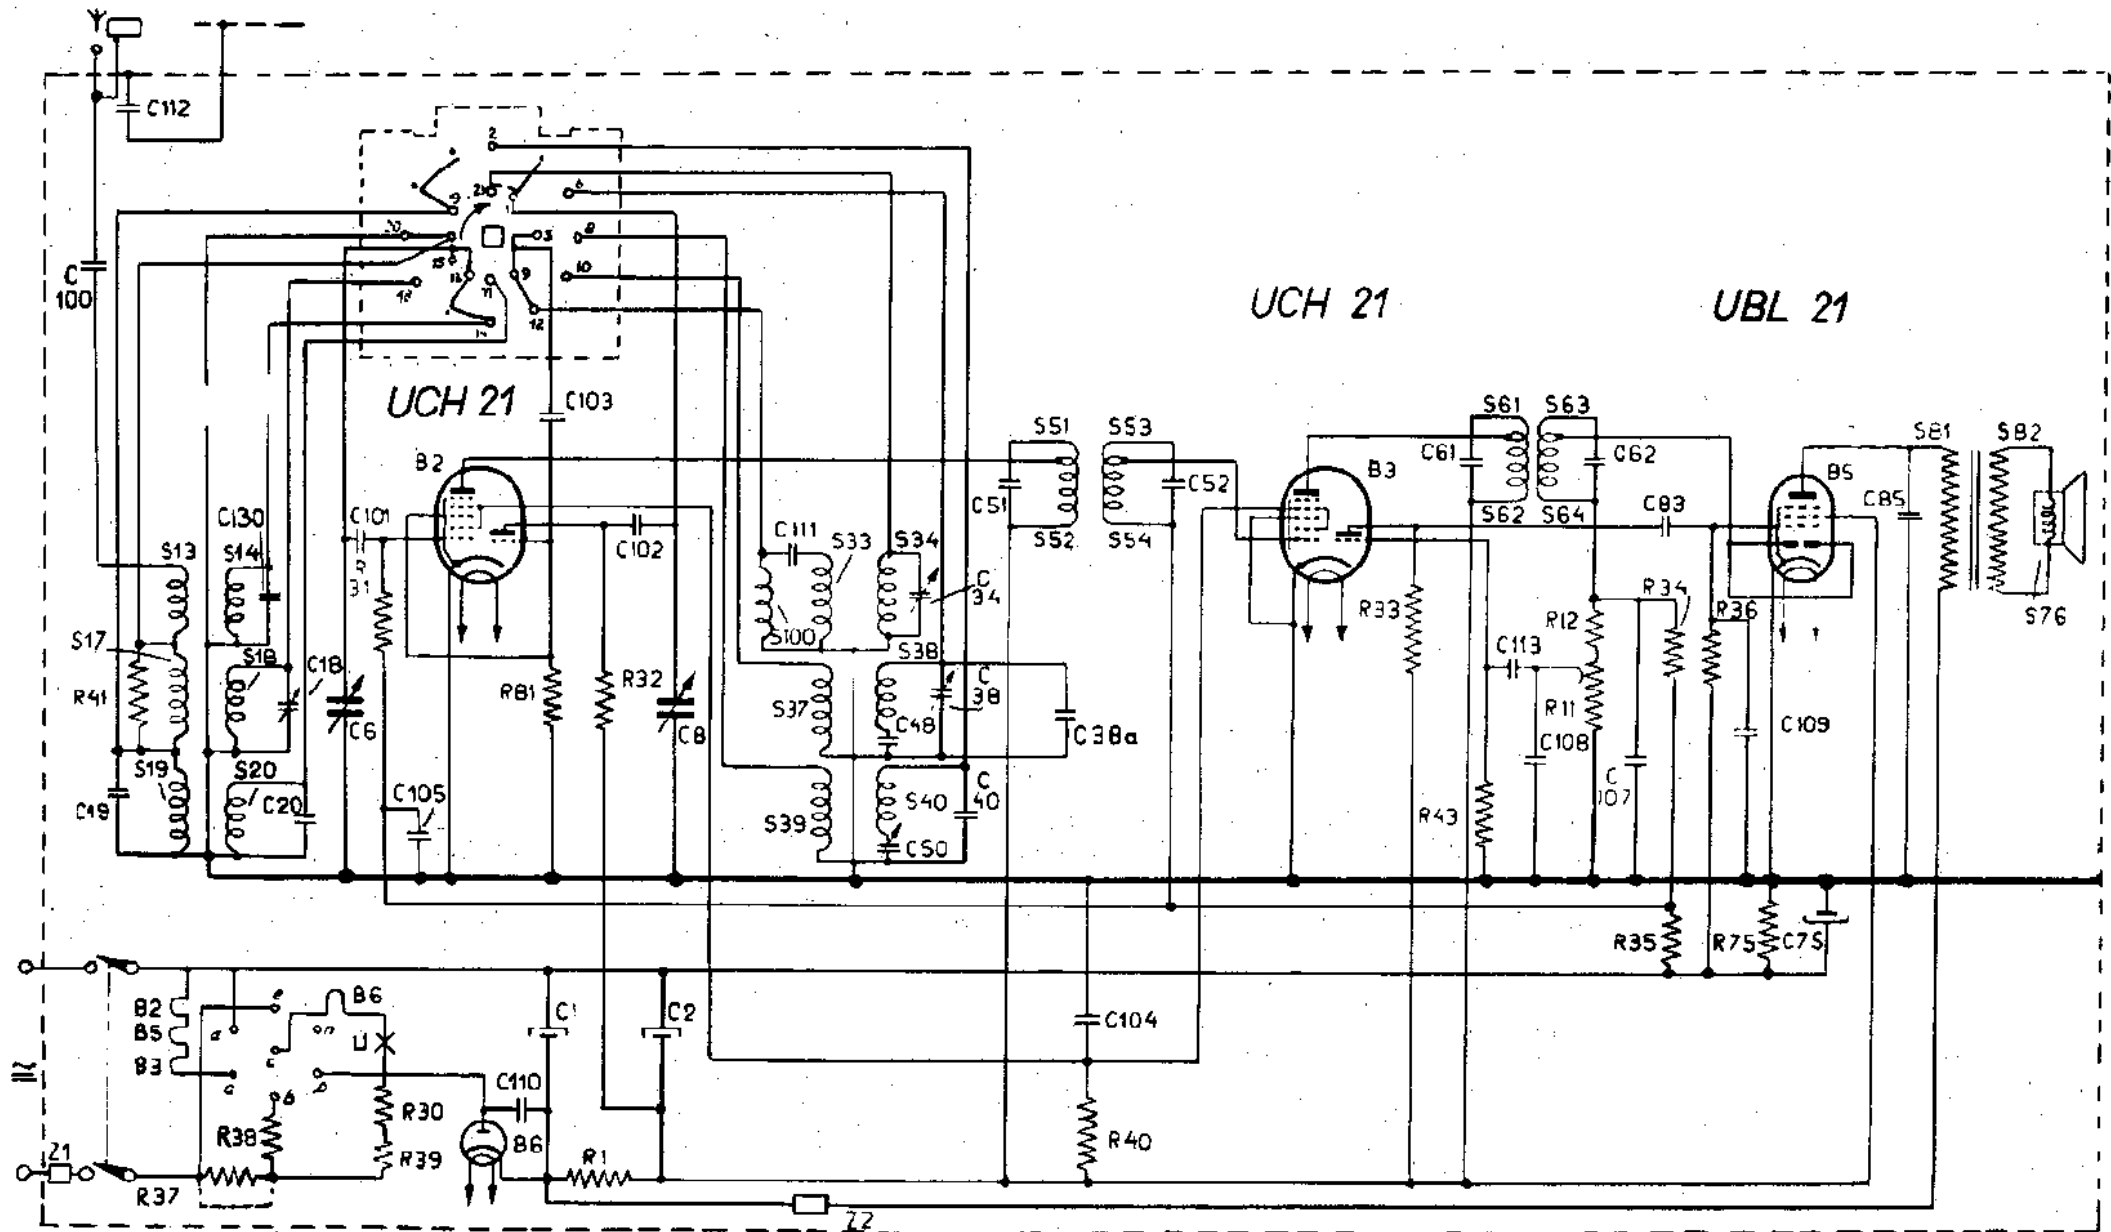

UY1N

SIERA

104 U


SIERA 104 U

COILS SPOELEN - ROBTINES

Nr. No.	Waarde-Value Valeur-Wert	Codenummer No. de Code
S17	40 Ohm	
S18	7.5 Ohm	
S19	160 Ohm	A3 120 18.0
S20	40 Ohm	
S13	2.5 Ohm	
S14	< 1 Ohm	
S33	< 1 Ohm	
S34	< 1 Ohm	A3 120 17.3
S37	4 Ohm	
S38	5 Ohm	
S100	2 Ohm	
S39	7 Ohm	A3 110 04.0
940	15 Ohm	
S51	1.8 Ohm	
S52	8 Ohm	
S53	2 Ohm	A3 121 03.0
S54	9 Ohm	
C51	103 pF	
C52	103 pF	
S61	1.7 Ohm	
S62	8 Ohm	
S63	1.8 Ohm	A3 121 04.0
S64	8 Ohm	
C61	103 pF	
C62	103 pF	
S76	4 Ohm	49 981 03.0
S81	364 Ohm	
S82	< 1 Ohm	A1 081 88.0

RESISTORS WEERSTANDEN - RESISTANCES

Nr. No.	Warde-Value Valeur-Wert	Codennummer Novels Code
R1	1200 Ohm	48 494 10/1K2
R11	0.5 M. Ohm	49 500 11.0
R12	47000 Ohm	48 425 10/47K
R30	170 Ohm	49 378 80.0
R31	0.82 M. Ohm	48 425 10/820K
R32	10000 Ohm	48 426 10/10K
R33	68000 Ohm	48 426 10/68K
R34	1 M. Ohm	48 426 10/1M
R35	6.8 M. Ohm	48 427 10/68K
R36	0.68 M. Ohm	48 425 10/680K
R37	75 Ohm	
R38	150 Ohm	49 362 99.2
R39	190 Ohm	
R40	10000 Ohm	48 427 10/10K
R41	18000 Ohm	48 425 10/18K
R43	6.8 M. Ohm	48 427 10/68K
R75	220-270 Ohm	48 427 10/220Z
	parallel	48 427 10/270Z
R81	47000 Ohm	48 425 10/47K
Z1	400 mA	08 140 46.0
Z2	70 mA	08 141 35.0

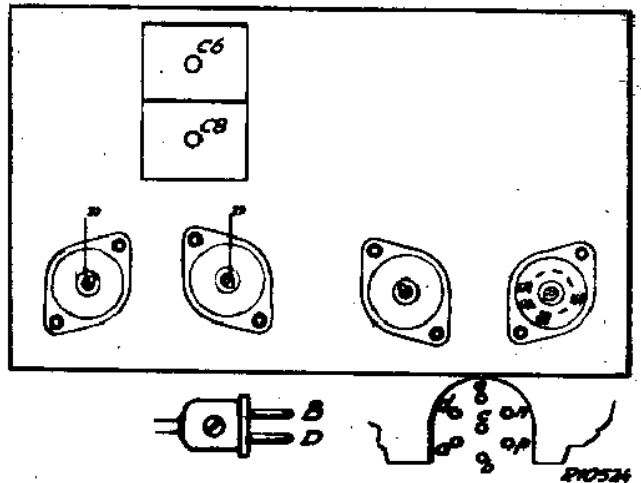

CAPACITORS CONDENSATOREN - CONDENSATEURS

Nr. No.	Waarde-Value Valeur-Wert	Code number No. de Code
C1 C2	50450 uF	49 031 09.5
C6 C8	11-400 pF	49 000 53.0
C18	20 pF	28 212 18.0
C19	39 pF	48 408 10/30E
C20	22 pF	48 406 99/22E
C34	7 pF	49 005 26.0
C38	32 pF	28 212 06.0
C38a	8.2 pF	48 406 99/82E
C40	50 pF	48 408 99/50E
C48	421 pF	48 406 01/421E
C50	200 pF	28 212 08.1
C51 C52 C61 C62	Zie "Spoelen" Voir "Bobines" See "Coils" Siehe "Spulen"	
C75	100 uF	49 020 39.0
C83	6800 pF	48 751 20/68K
C85	4700 pF	48 758 20/47K
C100	1000 pF	48 757 20/1K
C101	120 pF	48 408 10/120E
C102	470 pF	48 408 20/470E
C103	82 pF	48 408 10/82E
C104	47000 pF	48 751 20/47K
C105	47000 pF	48 750 20/47K
C107	100 pF	48 408 20/100E
C108	68 pF	48 408 20/68E
C109	150 pF	48 408 10/150E
C110	22000 pF	49 126 50.0
C111	56 pF	48 408 10/56E
C112	1000 pF	48 757 20/1K
C113	22000 pF	48 750 20/22K
C150	12 pF	48 406 99/12E

R									
9	26	34	30	53	55	56			
	73	25	115	180	205	205			
10	24	27	$\frac{32}{d}$	$\frac{32}{d}$	$\frac{32}{d}$	$\frac{32}{d}$	$\frac{32}{d}$	$\frac{32}{d}$	$\frac{32}{d}$
	145	145	455	305	110	330	455	424	
11	$\frac{b}{c}$								
	255								
12	21	$\frac{32}{d}$	$\frac{32}{d}$		C _B				
	455	235	465	10-20	200-449	700-999			
12									

C									
9	$\frac{34}{d}$	$\frac{34}{d}$	F						
	480	480	190						
10									

11	25	36		
	320	105		
12	26	24	$\frac{32}{d}$	$\frac{32}{d}$
	480	155	180	420

Vol. max,