



Philips 655 U



R11059

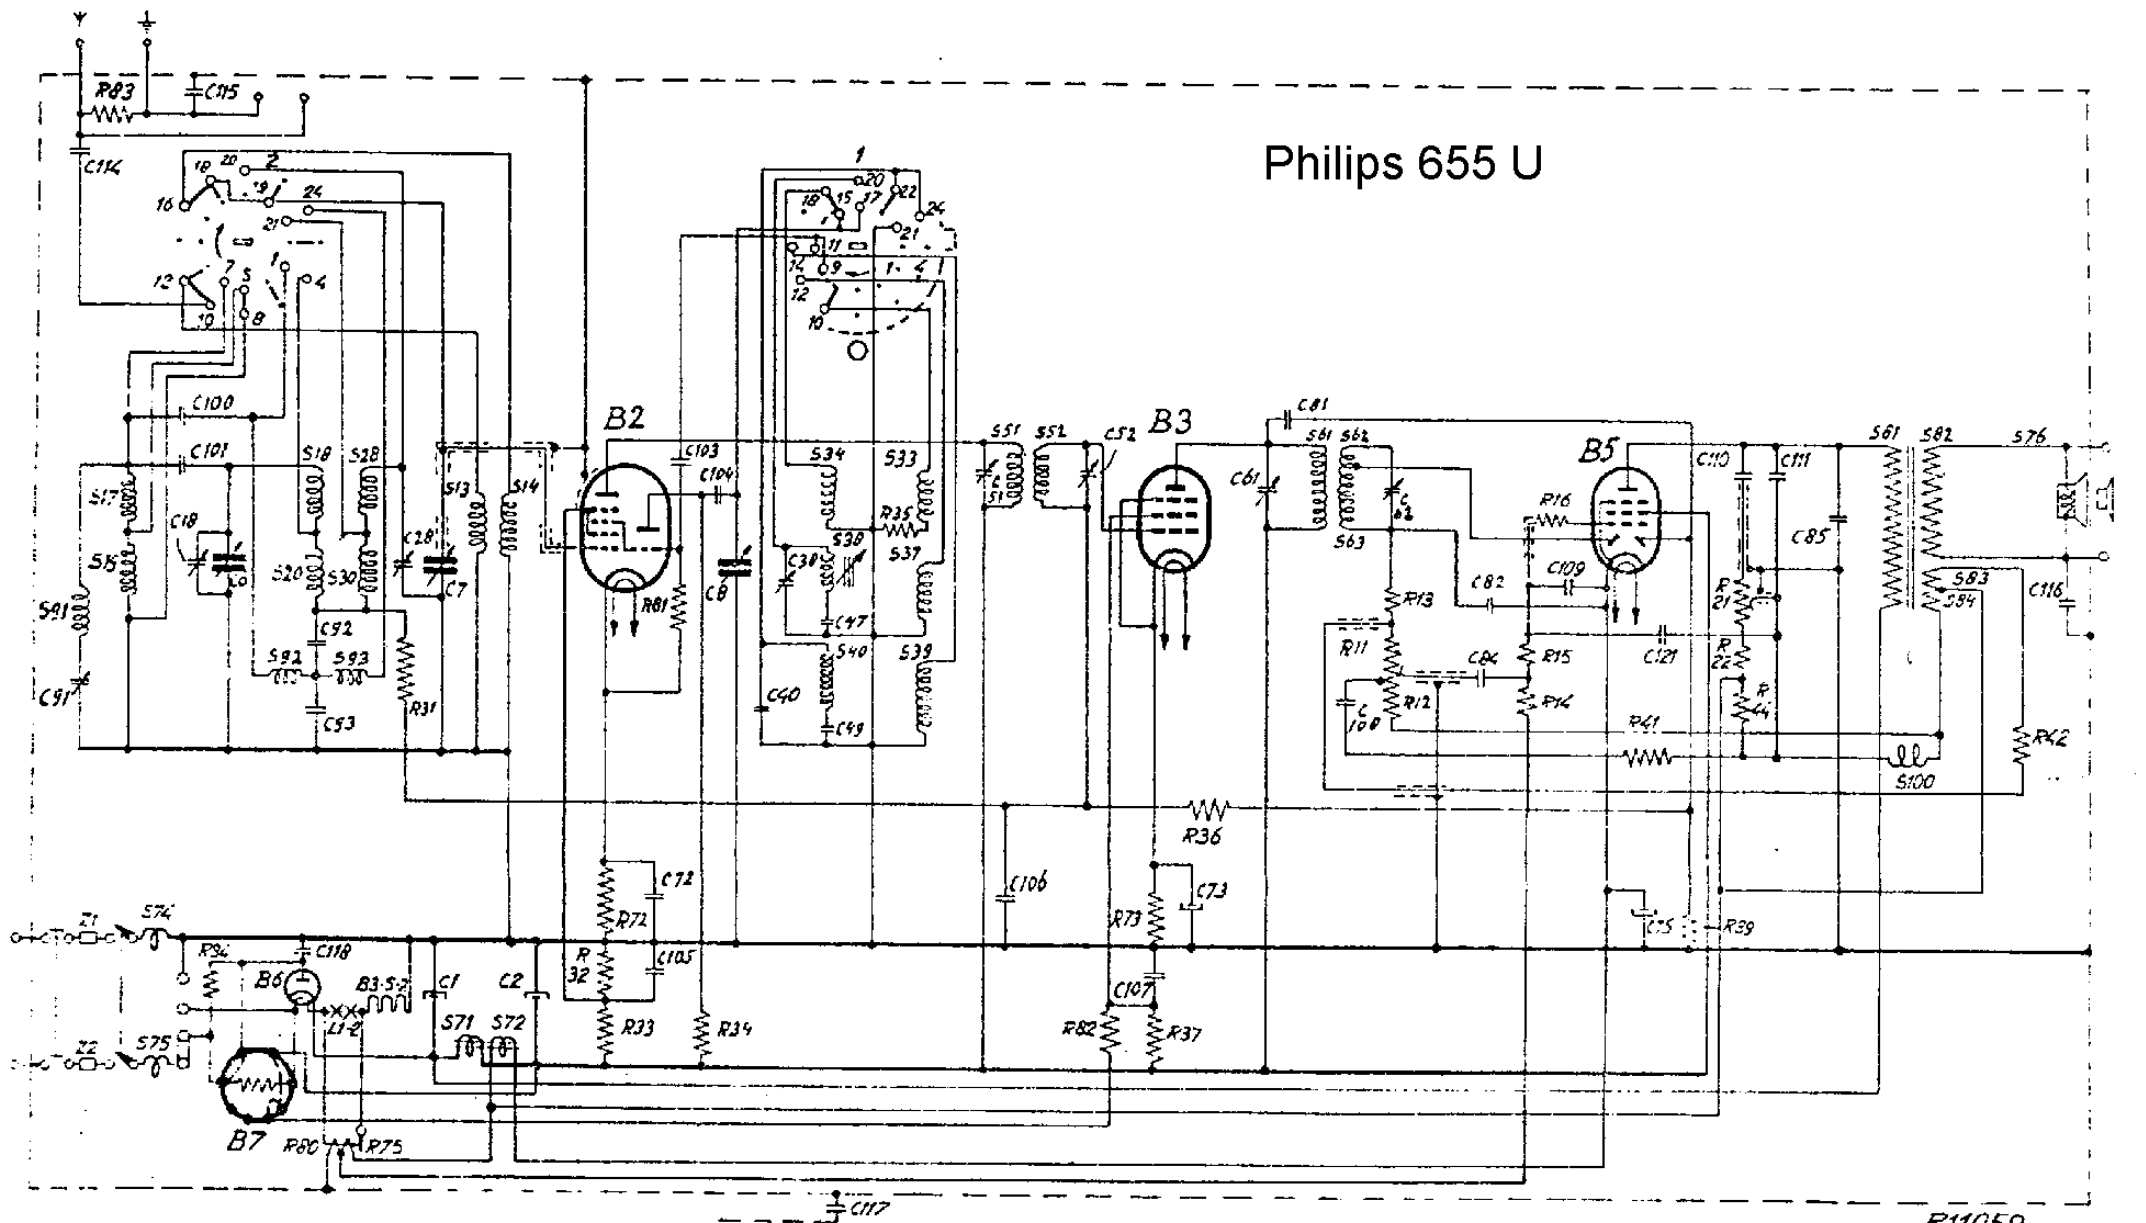

B2



B3



B5




B6



B7



A




B




C




D



E



F



G

PO413A

PHILIPS SERVICE


655 U

13,8—50,5 m
186—585 m
708—2000 m

9602 Z 5 11
9636 Z 5 11


110—110 V, 200 225 V
60 W

120 kc/s

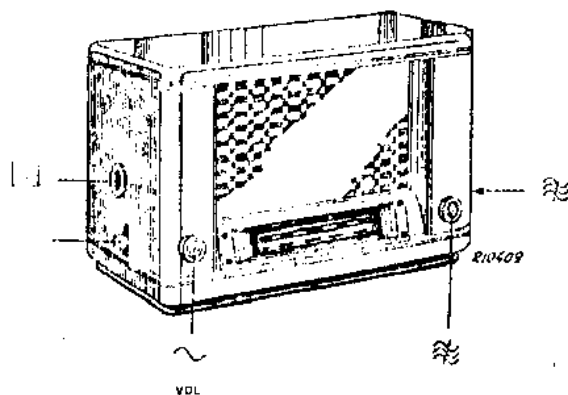

186—585 m I	708—2000 m II	186—585 m V
max.	max.	max.
C6, C7, C8 min.	C6, C7, C8 max.	857 kc/s — Y
120 kc/s—33000 pF—g1102	120 kc/s — Y	C6, C7, C8 350 m
C61—82 pF	C91 min.	350 m
C62 max.	186—585 m II	
C61	max.	
C62—82 pF	C6, C7, C8 + 15°	
C61 max.	1600 kc/s — Y	
C62	C38, C28, C18 max.	
C51—82 pF		
C52 max.		
C51		
C52—82 pF		
C51 max.		
C52		

09 992 44.0

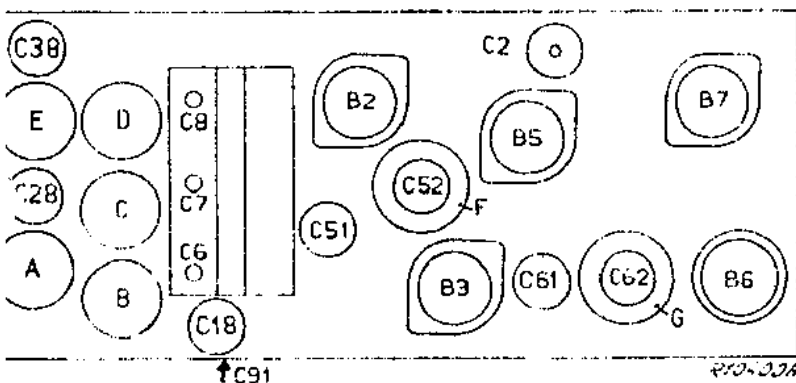

R11	0,65 MΩ	49 500 19.0	C1	50 pF	49 029 01.0
R12	0,2 MΩ		C2	15 pF	
R13	47000 Ω	48 425 10 47K	C6	11-490 pF	
R14	1 MΩ	48 426 10 1M	C7	11-490 pF	28 212 30.0
R15	62000 Ω	48 425 10 62K	C8	11-490 pF	
R16	1000 Ω	48 425 10 1K	C18	20 pF	49 005 05.2
R21	0,5 MΩ	49 500 86.1	C28	20 pF	49 005 05.2
R22	1800 Ω	48 425 10 18K	C38	20 pF	49 005 05.2
R31	0,1 MΩ	48 425 10 100K	C40	35 pF	48 406 05 35E
R32	22000 Ω	48 427 10 22K	C47	1450 pF	48 429 01 1K45
R33	27000 Ω	48 427 10 27K	C49	394 pF	48 429 01 394E
R34	22000 Ω	48 427 10 22K	C51	70-100 pF	49 005 01.1
R35	39 Ω	48 425 10 39E	C52	70-100 pF	
R36	1,5 MΩ	48 426 10 1M5	C61	70-100 pF	49 005 01.1
R37	47000 Ω	48 426 10 47K	C62	70-100 pF	
R39	0,68 MΩ	48 425 10 680K	C73	47000 pF	48 750 20 47K
R41	12000 Ω	48 425 10 12K	C75	25 pF	48 750 20 25K
R42	0,82 MΩ	48 425 10 820K	C81	3,9 pF	48 406 99 3,9E
R44	12000 Ω	48 425 10 12K	C82	56 pF	48 406 10 56E
R72	330 Ω	48 425 10 330E	C91	3300 pF	48 751 20 33,3
R73	330 Ω	48 425 10 330E	C85	1000 pF	48 758 20 1K
R75	150 Ω	A1 151 01.0	C91	70-100 pF	49 005 01.1
R80	180 Ω		C92	12000 pF	48 750 10 12K
R81	47000 Ω	48 425 10 47K	C93	39000 pF	48 750 10 39K
R82	10000 Ω	48 425 10 10K	C100	33 pF	48 406 10 33E
R83	0,1 MΩ	48 425 10 100K	C101	10 pF	48 406 99 10E
R84	100 Ω	48 469 10 100E	C103	47 pF	48 406 10 47E
Z1	600 mA	08 140 43.1	C104	470 pF	48 406 20 470E
Z2	600 mA	08 140 43.1	C105	47000 pF	48 751 20 47K
			C106	47000 pF	48 750 20 47K
			C107	47000 pF	48 751 20 47K
			C108	27000 pF	48 750 10 27K
			C109	82 pF	48 406 10 82E
			C110	6800 pF	48 758 20 68E
			C111	330 pF	49 005 05.3
			C114	1000 pF	48 758 20 1K
			C115	4700 pF	48 752 20 47K
			C116	3700 pF	48 757 20 47K
			C117	4700 pF	48 757 20 47K
			C118	22000 pF	48 756 20 22K
			C121	10 pF	48 406 99 10E

	B2	B3	B5	B6	B7	
	ECH 3	EF 9	CHL 1	CY 1	CL C9	
Va	at 6,5 all 180	175	185	—	—	V
Vg2(4)	70	100	175	—	—	V
Vk	2,3	2,5	1,5	—	—	V
Ia	at 5,4 all 2,5	5,3	40	—	—	mA
ig2(4)	0,98	1,5	5,9	—	—	mA

1 = 190 V.
2 = 175 V.

pyricht '47