


I: 200 - 550 m II: 800 - 1900 m III: IV: M.F.: 115 °KC/s GOLFSCHAKELAAR

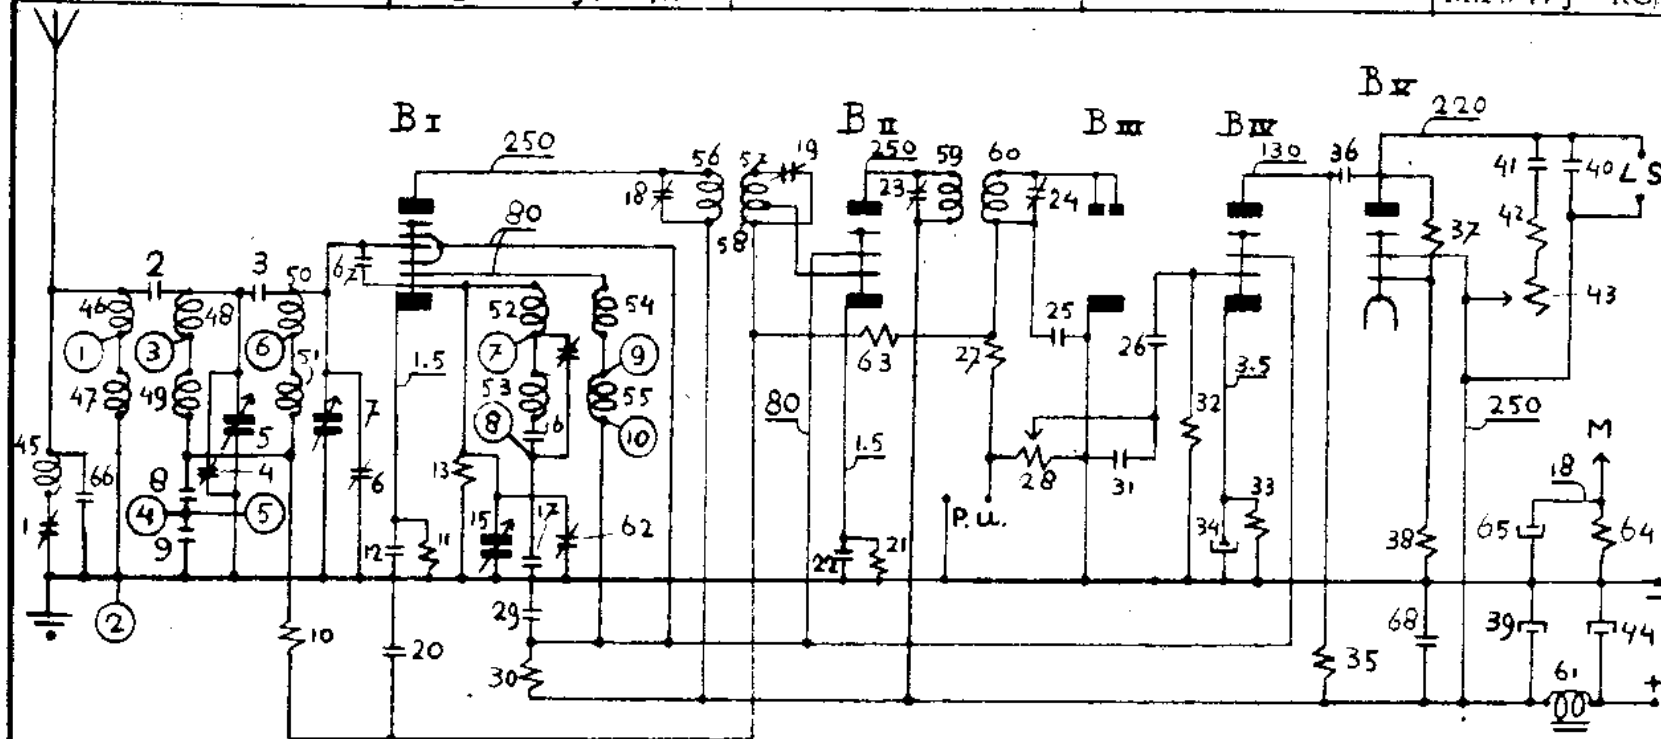

I: 1-2 3-4 5-6  
7-8 9-10  
II: OPEN

1 40-150 pF	16 930 pF	31 200 pF	46 L 30 Ω	61 L 500 Ω	76	91	106	B	Type	G <sub>1</sub>	G <sub>2</sub>	G <sub>3-5</sub>	G <sub>4</sub>	A
2 10 pF	17 1810 pF	32 1 MΩ	47 L 90 Ω	62 0-55 pF	77	92	107	I	AK1		1.2	3.5		2.3
3 < 1 pF	18 40-150 pF	33 6400 Ω	48 L 4 Ω	63 1 MΩ	78	93	108	II	AF 3		1			2
4 0-55 pF	19 40-150 pF	34 25 mF	49 L 40 Ω	64 800 Ω	79	94	109	III	AB1					
5 0-430 pF	20 0.1 mF	35 0.32 MΩ	50 L 4 Ω	65 25 mF	80	95	110	IV	E446					0.5
6 0-55 pF	21 640 Ω	36 10000 pF	51 L 40 Ω	66 80 pF	81	96	111	V	E443H		4			2.0
7 0-430 pF	22 0.1 mF	37 0.64 MΩ	52 L 10 Ω	67 2 pF	82	97	112	VI						
8 25000 pF	23 40-150 pF	38 0.5 MΩ	53 L 40 Ω	68 0.5 mF	83	98	113	VII						
9 25000 pF	24 40-150 pF	39 32 mF	54 L 4 Ω	69 Lsp 5 Ω	84	99	114	VIII						
10 10000 Ω	25 100 pF	40 2000 pF	55 L 10 Ω	70	85	100	115	IX						
11 200 Ω	26 10000 pF	41 32000 pF	56 L 140 Ω	71	86	101	116	X						F
12 50000 pF	27 50000 Ω	42 100 Ω	57 L 125 Ω	72	87	102	117							
13 50000 Ω	28 0.5 MΩ	43 50000 Ω	58 L 20 Ω	73	88	103	118							
14 0-55 pF	29 1 mF	44 32 mF	59 L 140 Ω	74	89	104	119							
15 0-430 pF	30 32000 Ω	45 L 135 Ω	60 L 140 Ω	75	90	105	120							

MERK: PHILIPS  
TYPE: 522-525-572 A