


S:	24,25,26,12,4	5,6	7,8	3	9,10	11,12	13	14,15	16	17	18,19					
C:	17	13,18,4,25	19	20	5,10,35,11,1	2	12,14	15,33,34	6,21,22	36,23	24,27,16,7,37,26,28	29,8	30	3	31	32
P:	16	8	1	23,22,20,6	9	24	2,19	21	10,3,4	18	11	13,17,12,7	14	15		

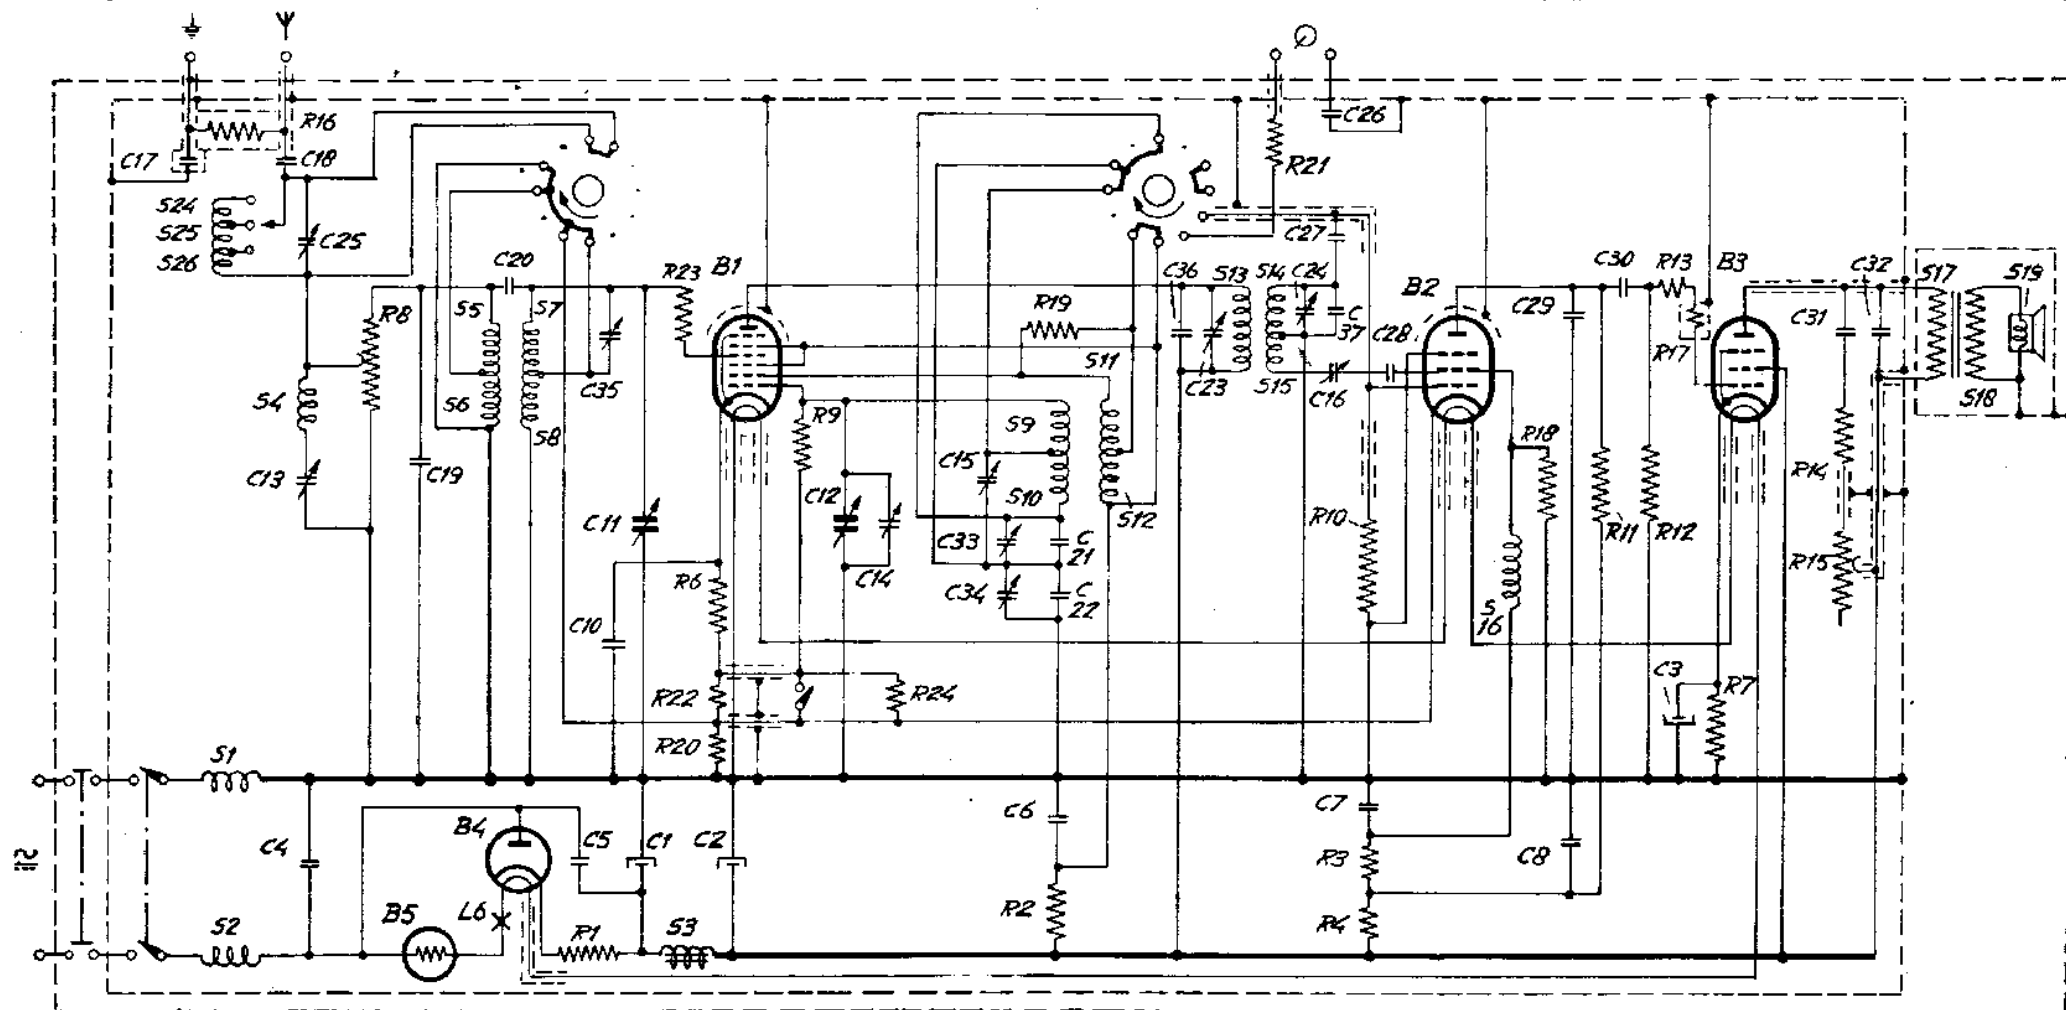

R11323

CK1

CF1


CL4

CY1


C1



B1



B2




B3




B4




B5




518AU



A



B




C


R11306

PHILIPS SERVICE

518 HU-AU

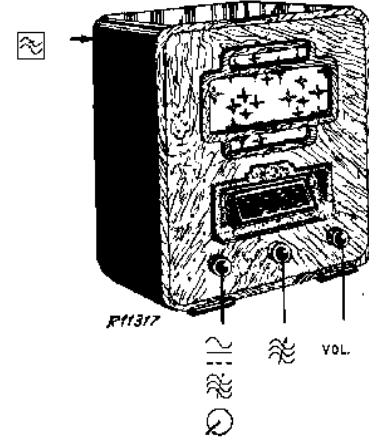

760—1900 m	199—552 m	760—1900 m
C11, C12 max. VOL. max. g4B1—0,1 MΩ— 475 ke/s—33000 pF—g4B1 C23, C24 max.	R9 25 pF—gE1 1333 ke/s— C11, C12 225 m C35 max. R9 600 ke/s— C11, C12 500 m VOL. max. C34 max. 1333 ke/s— C11, C12 225 m C14 max.	VOL. max. 333 ke/s— C11, C12 900 m C15 max. 157,9 ke/s— C11, C12 1900 m C33 max.

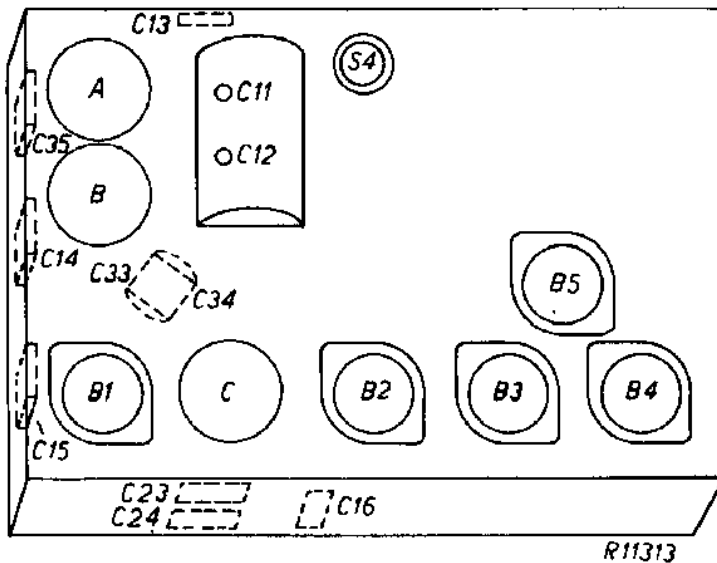

R1*	320 Ω	28 799 44.0*	C1	32 μF	28 182 40.0
R2	47000 Ω/2	48 427 10/47K	C2	32 μF	28 182 40.0
R3	1 MΩ	48 426 10/1M	C3*	25 μF	28 180 02.0
R4	22000 Ω	48 426 10/22K	C4	0,1 μF	48 752 10/100K
R6	220 Ω	48 426 10/220E	C5*	0,1 μF	28 199 90.0
R7	330 Ω	48 426 10/330E	C6	0,47 μF	48 751 10/470K
R8	390 Ω	48 426 10/390E	C7	0,47 μF	48 751 10/470K
R8	20000 Ω	28 810 88.0	C8	0,47 μF	48 751 10/470K
R9	47000 Ω	48 426 10/47K	C10	0,1 μF	48 751 10/100K
R10	2,2 MΩ	48 427 10/2M2	C11	11-450 pF	—
R11	0,33 MΩ	48 426 10/330K	C12	200 pF	28 212 08.2
R12	0,68 MΩ	48 426 10/680K	C13	125 pF	28 212 07.2
R14	100 Ω	48 426 10/100E	C14	125 pF	28 212 07.2
R15	50000 Ω	28 808 29.0	C15	125 pF	28 212 07.2
R16	0,22 MΩ	48 426 10/220K	C16	50-250 pF	—
R17*	1000 Ω	28 495 54.0	C17	4700 pF	48 752 10/4K7
R18	0,39 MΩ	48 426 10/390K	C18	1000 pF	48 752 20/1K
R19	4700 Ω	48 426 10/4K7	C19	100 pF	48 429 10/100E
R20	47 Ω	48 426 10/47E	C20	10 pF	48 429 99/10E
R21	0,22 MΩ	48 426 10/220K	C21	160 pF	48 429 02/160E
R22	2700 Ω	48 426 10/2K7	C22	320 pF	48 429 10/320E
R23	100 Ω	48 426 10/100E	C23	125 pF	28 212 07.2
R24	1500 Ω	48 426 10/1K5	C24	125 pF	28 212 07.2
			C25	200 pF	28 212 08.2
			C26	47000 pF	48 751 10/47K
			C27	80 pF	48 429 10/80E
			C28	2200 pF	48 751 10/2K2
			C29	125 pF	48 429 10/125E
			C30	27000 pF	48 751 10/27K
			C31	47000 pF	48 752 10/47K
			C32	4000 pF	28 199 71.0
			C33	40-145 pF	28 210 55.0
			C34	125 pF	28 212 07.2
			C35	68 pF	48 406 10/68E
			C36	68 pF	48 406 10/68E
			C37	68 pF	48 406 10/68E

220 V					
	B1	B2	B3	B4	B5
	CK 1	CF 1	CL 4	CY 1	C 1
V _a	189	68	160		V
V _{g2}	66	24	160		V
V _{g3(5)}	66	—	—		V
-V _g	1,5	0,4	13		V
I _a	1,8	0,5	40		mA
I _{g2}	1,5	0,13	5,2		mA
I _{g3(5)}	3,3	—	—		mA

S1, S2	28 562 90.0*	S16	28 561 27.1*
S3	28 550 76.1*	S17, S18	28 524 94.0
S4	—	S19	—
S5, S6, S7, S8	28 564 62.0*	S24, S25, S26	28 564 90.0*
S9, S10, S11, S12	28 564 61.2*	S20, S21	28 524 81.0* ⁽¹⁾
S13, S14, S15	28 562 92.2		

⁽¹⁾ 518 AU

V_{C1} = 206 V
V_{C2} = 190 V

Copyright
N.V. Philips Gloeilampenfabrieken,
Eindhoven
Imprimé en Hollande