


Admiral

Chassis 5B7, Models: YK103, YK117, YK118, YK121
Chassis 5B7A, Models: YKC133, YKC147, YKC148, YKC151

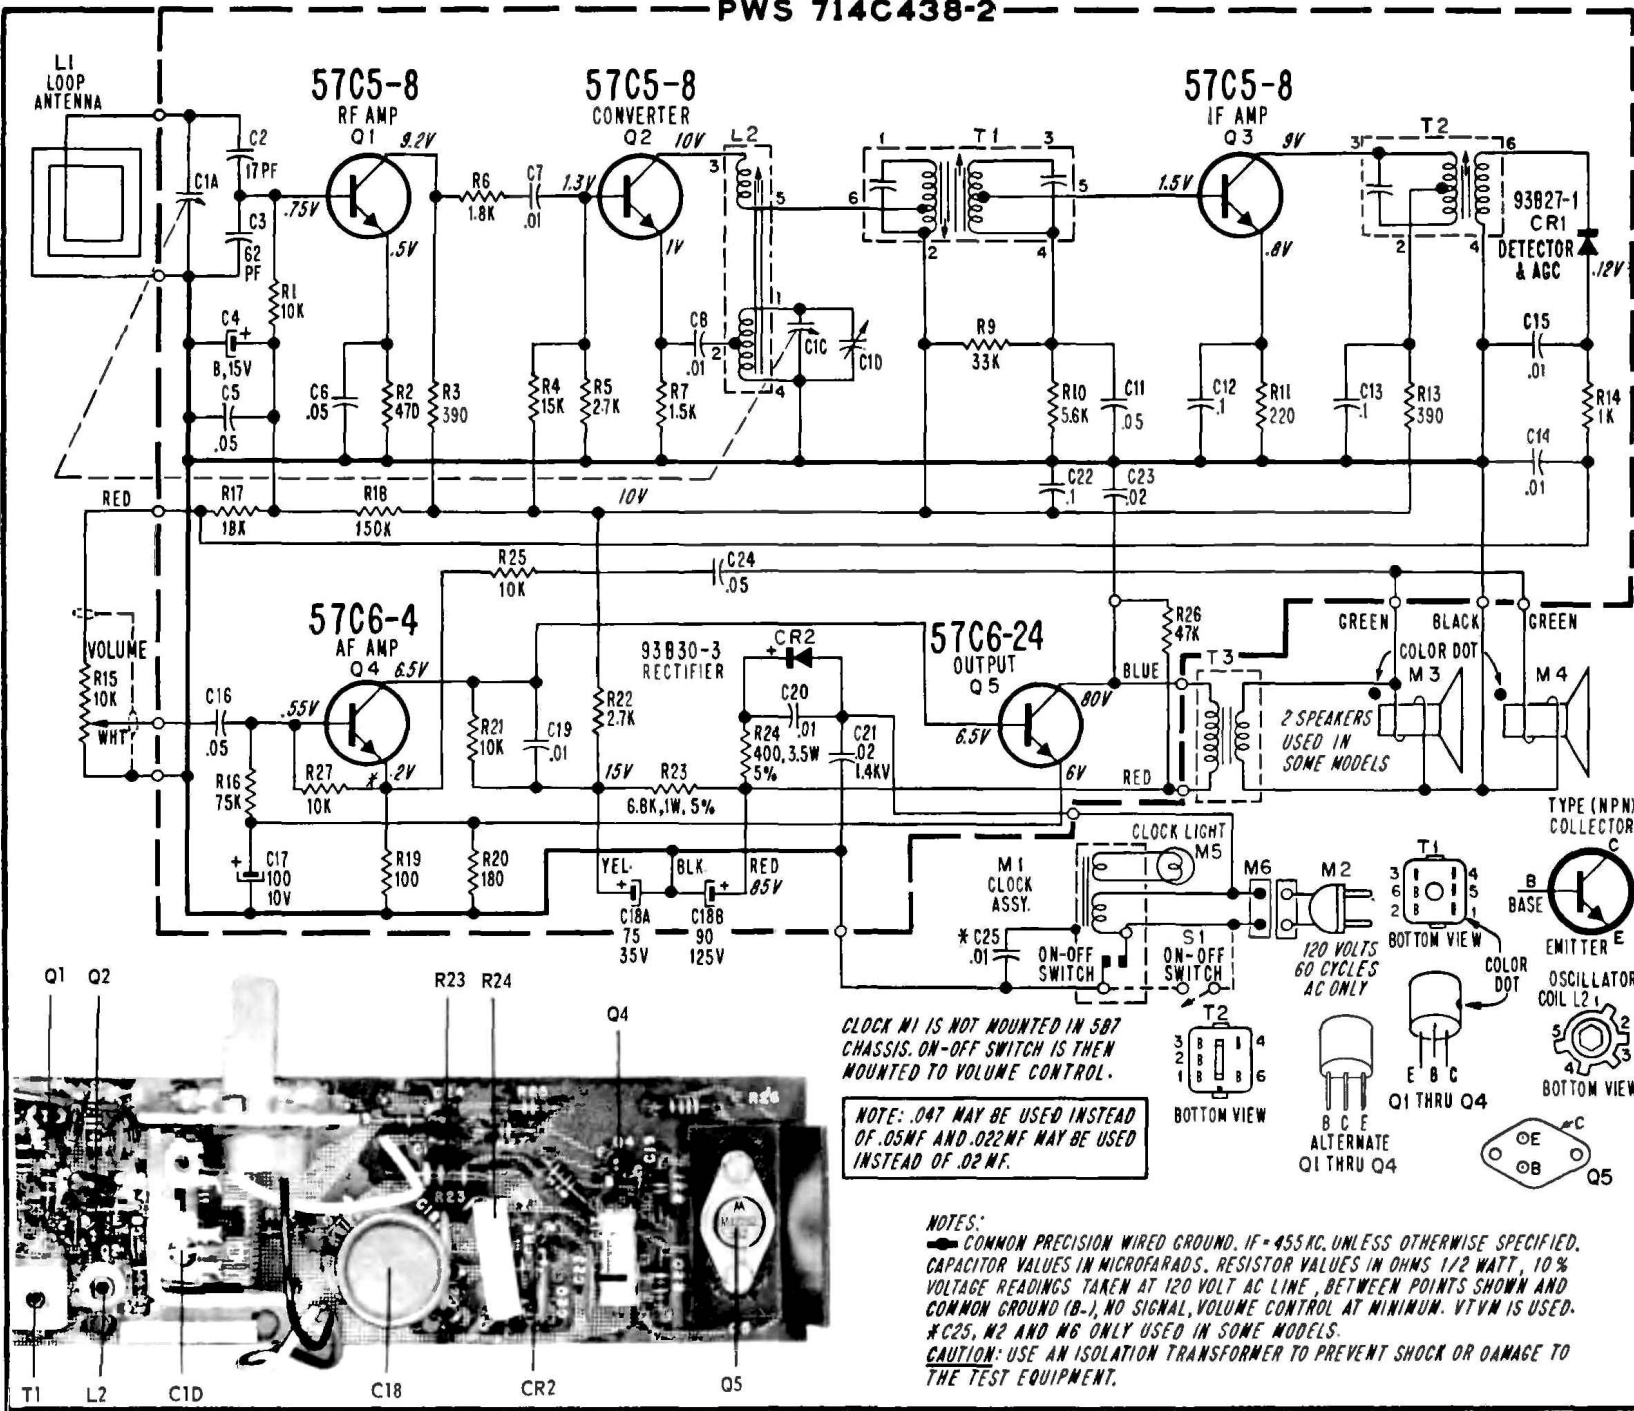

CLOCK M1 IS NOT MOUNTED IN 5B7 CHASSIS. ON-OFF SWITCH IS THEN MOUNTED TO VOLUME CONTROL.

NOTE: .047 MAY BE USED INSTEAD OF .05MF AND .022MF MAY BE USED INSTEAD OF .02 MF.

NOTES:

COMMON PRECISION WIRED GROUND. IF = 455 KC. UNLESS OTHERWISE SPECIFIED.
CAPACITOR VALUES IN MICROFARADS. RESISTOR VALUES IN OHMS 1/2 WATT, 10% VOLTAGE READINGS TAKEN AT 120 VOLT AC LINE, BETWEEN POINTS SHOWN AND COMMON GROUND (B-). NO SIGNAL, VOLUME CONTROL AT MINIMUM. VTVM IS USED.
*C25, M2 AND M6 ONLY USED IN SOME MODELS.
CAUTION: USE AN ISOLATION TRANSFORMER TO PREVENT SHOCK OR DAMAGE TO THE TEST EQUIPMENT.