

PHILIPS SERVICE

845 U

13,8—51 m
175—585 m
708—2000 m



9660 Z = 5 Ω

110 V, 125 V, 200 V, 220 V
42 W

128 ke/s

708—2000 m	I	175—585 m	III	708—2000 m	III
C6, C7, C8 min.	VOL. max.	C6, C7, C8 + 15°	max.	-25 pF—αB2	C8
C125	128 ke/s—33000 pF—g1B2	1600 ke/s—	1600 ke/s—	160 ke/s—	C6, C7, C8 160 ke/s
S52, S61—82 pF	C62, C51 max.	C38, C28, C18 max.	-25 pF—αB2	C8	max.
S52, S61	S51, S63—82 pF	C6, C7, C8 550 ke/s	C8	C50 max.	
C61, C52 max.	S51, S63	C6, C7, C8 + 15°	C6, C7, C8 1154 ke/s	175—585 m	V
C125		1600 ke/s—	260 m		
708—2000 m	II	C38, C28, C18 max.			
C6, C7, C8 max.					
VOL. max.					
128 ke/s—					
C91 min.					

15° = 09 992 44.0

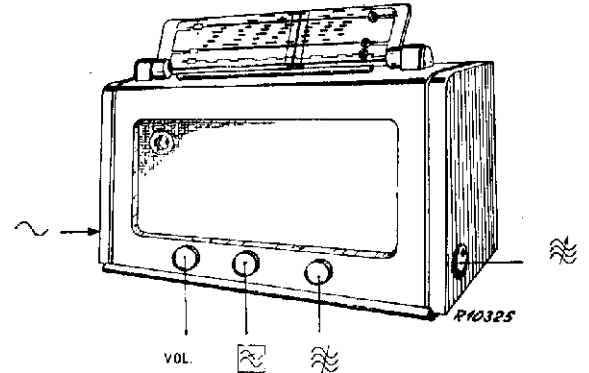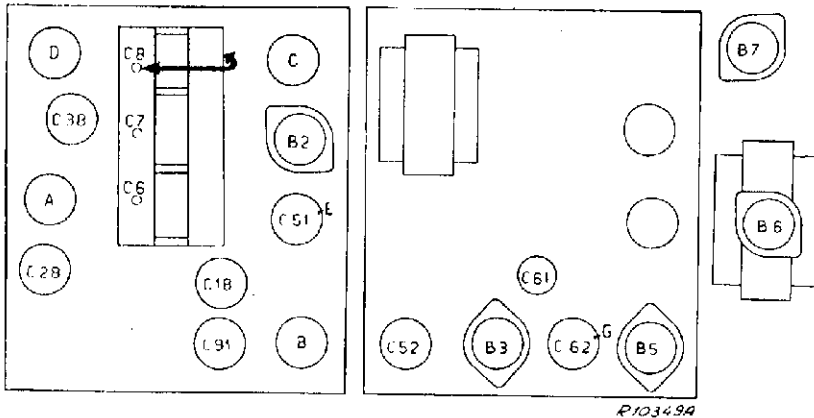

R11	0,65 MΩ	49 470 36.0	C1	50 pF	49 031 01.0
R12	0,2 MΩ		C2	50 pF	
R21	0,2 MΩ	49 470 36.0	C6	11-490 pF	
R22	0,65 MΩ		C7	11-490 pF	49 000 54.0
R31	0,1 MΩ	48 425 10/100K	C8	11-490 pF	
R32	2x15000 Ω	48 427 10/15K	C14	3,3 pF	48 406 99/3F3
R33	15000 Ω	48 426 10/15K	C18	20 pF	49 005 05.2
R35	0,27 MΩ	48 425 10/270K	C28	20 pF	49 005 05.2
R36	0,27 MΩ	48 425 10/270K	C38	20 pF	49 005 05.2
R37	68000 Ω	48 425 10/68K	C40	36 pF	48 406 99/36E
R38	82000 Ω	48 425 10/82K	C47	1430 pF	49 057 60.0
R39	1,5 MΩ	48 426 10/1M5	C48	200 pF	28 212 08.2
R40	1 MΩ	48 426 10/1M	C49	390 pF	48 406 10/390E
R41	1 MΩ	48 426 10/1M	C50	200 pF	28 212 08.2
R42	0,82 MΩ	48 425 10/820K	C51	70-100 pF	49 005 06.0
R43	1000 Ω	48 425 10/1K	C52	70-100 pF	49 005 06.0
R44	4,7 MΩ	48 427 10/4M7	C61	70-100 pF	49 005 06.0
R45	0,82 MΩ	48 425 10/820K	C62	70-100 pF	49 005 06.0
R46	22000 Ω	48 425 10/22K	C73	100 pF	28 185 68.1
R47	12000 Ω	48 425 10/12K	C75	25 pF	28 182 24.1
R48	15000 Ω	48 425 10/15K	C81	6,8 pF	48 406 99/6E8
R49	1 MΩ	48 426 10/1M	C82	56 pF	48 406 99/56E
R50	1,5 MΩ	48 426 10/1M5	C83	18000 pF	48 751 10/18K
R51	2x56000 Ω	48 427 10/56K	C84	22000 pF	48 750 10/22K
R52	0,47 MΩ	48 425 10/470K	C85	4700 pF	48 758 20/4K7
R53	0,1 MΩ	48 426 10/100K	C91	70-100 pF	49 005 01.1
R54	1,5 MΩ	48 426 10/1M5	C92	12000 pF	48 750 10/12K
R55	82000 Ω	48 425 10/82K	C93	39000 pF	48 750 10/39K
R56	0,12M Ω	48 425 10/120K	C100	37 pF	48 406 99/37E
R57	0,82 MΩ	48 425 10/820K	C101	10 pF	48 406 99/10E
R58	3300 Ω	48 425 10/3K3	C103	150 pF	48 406 10/150E
R61	270 Ω	48 467 10/270E	C104	470 pF	48 406 10/470E
R62	180 Ω	49 362 55.1	C105	47000 pF	48 751 20/47K
R64	39 Ω		C106	1000 pF	48 757 20/1K
R73	270 Ω	48 425 10/270E	C107	4700 pF	48 757 20/4K7
R81	47000 Ω	48 425 10/47K	C108	82 pF	48 406 10/82E
R82	0,1 MΩ	48 425 10/100K	C109	47000 pF	48 750 20/47K
R83	0,47 MΩ	48 425 10/470K	C110	47000 pF	48 750 20/47K
R84	22000 Ω	48 427 10/22K	C111	47000 pF	48 751 20/47K
			C113	560 pF	48 406 10/560E
			C114	0,1 pF	48 750 20/100K
			C115	10000 pF	48 757 20/10K
			C116	47000 pF	48 757 20/47K
			C117	220 pF	48 406 10/220E
			C118	33000 pF	48 750 10/33K
			C119	12000 pF	48 750 10/12K
			C120	5600 pF	48 750 10/56K
			C122	4700 pF	48 757 20/4K7
			C131	22000 pF	48 756 20/22K

	B2	B3	B5	B6	B7	
	UCH 21	UCH 21	UBL 21	UYIN	UM 4	
Va	aH 160 aT 110	aH 160 aT 45	170			V
Vg2	90	80	160			V
Vk	—	2	—			V
Ia	aH 2,5 aT 2,7	aH 4,2 aT 1	48			mA
Ig2	4,9	2,75	7,3			mA

S13, S14, S28, S30 S17, S18, S19, S20 S33, S34, S100 S37, S38, S39, S40 S51, C51 S52, S53, C52 S61, S62, S63, C62 S71, S72, S73	A1 037 29.0 A1 037 28.0 A1 038 08.0 A1 037 30.1 A1 037 31.1 A1 037 46.0 A1 037 47.0 A1 151 17.0	S74, S75 S76 S81, S82, S83, S84 S85, S86 S91 S92, S93 S101, S102	A1 000 34.0 28 220 51.1 A1 082 49.0 28 587 88.0 28 587 71.0 A1 037 22.0
--	--	--	--