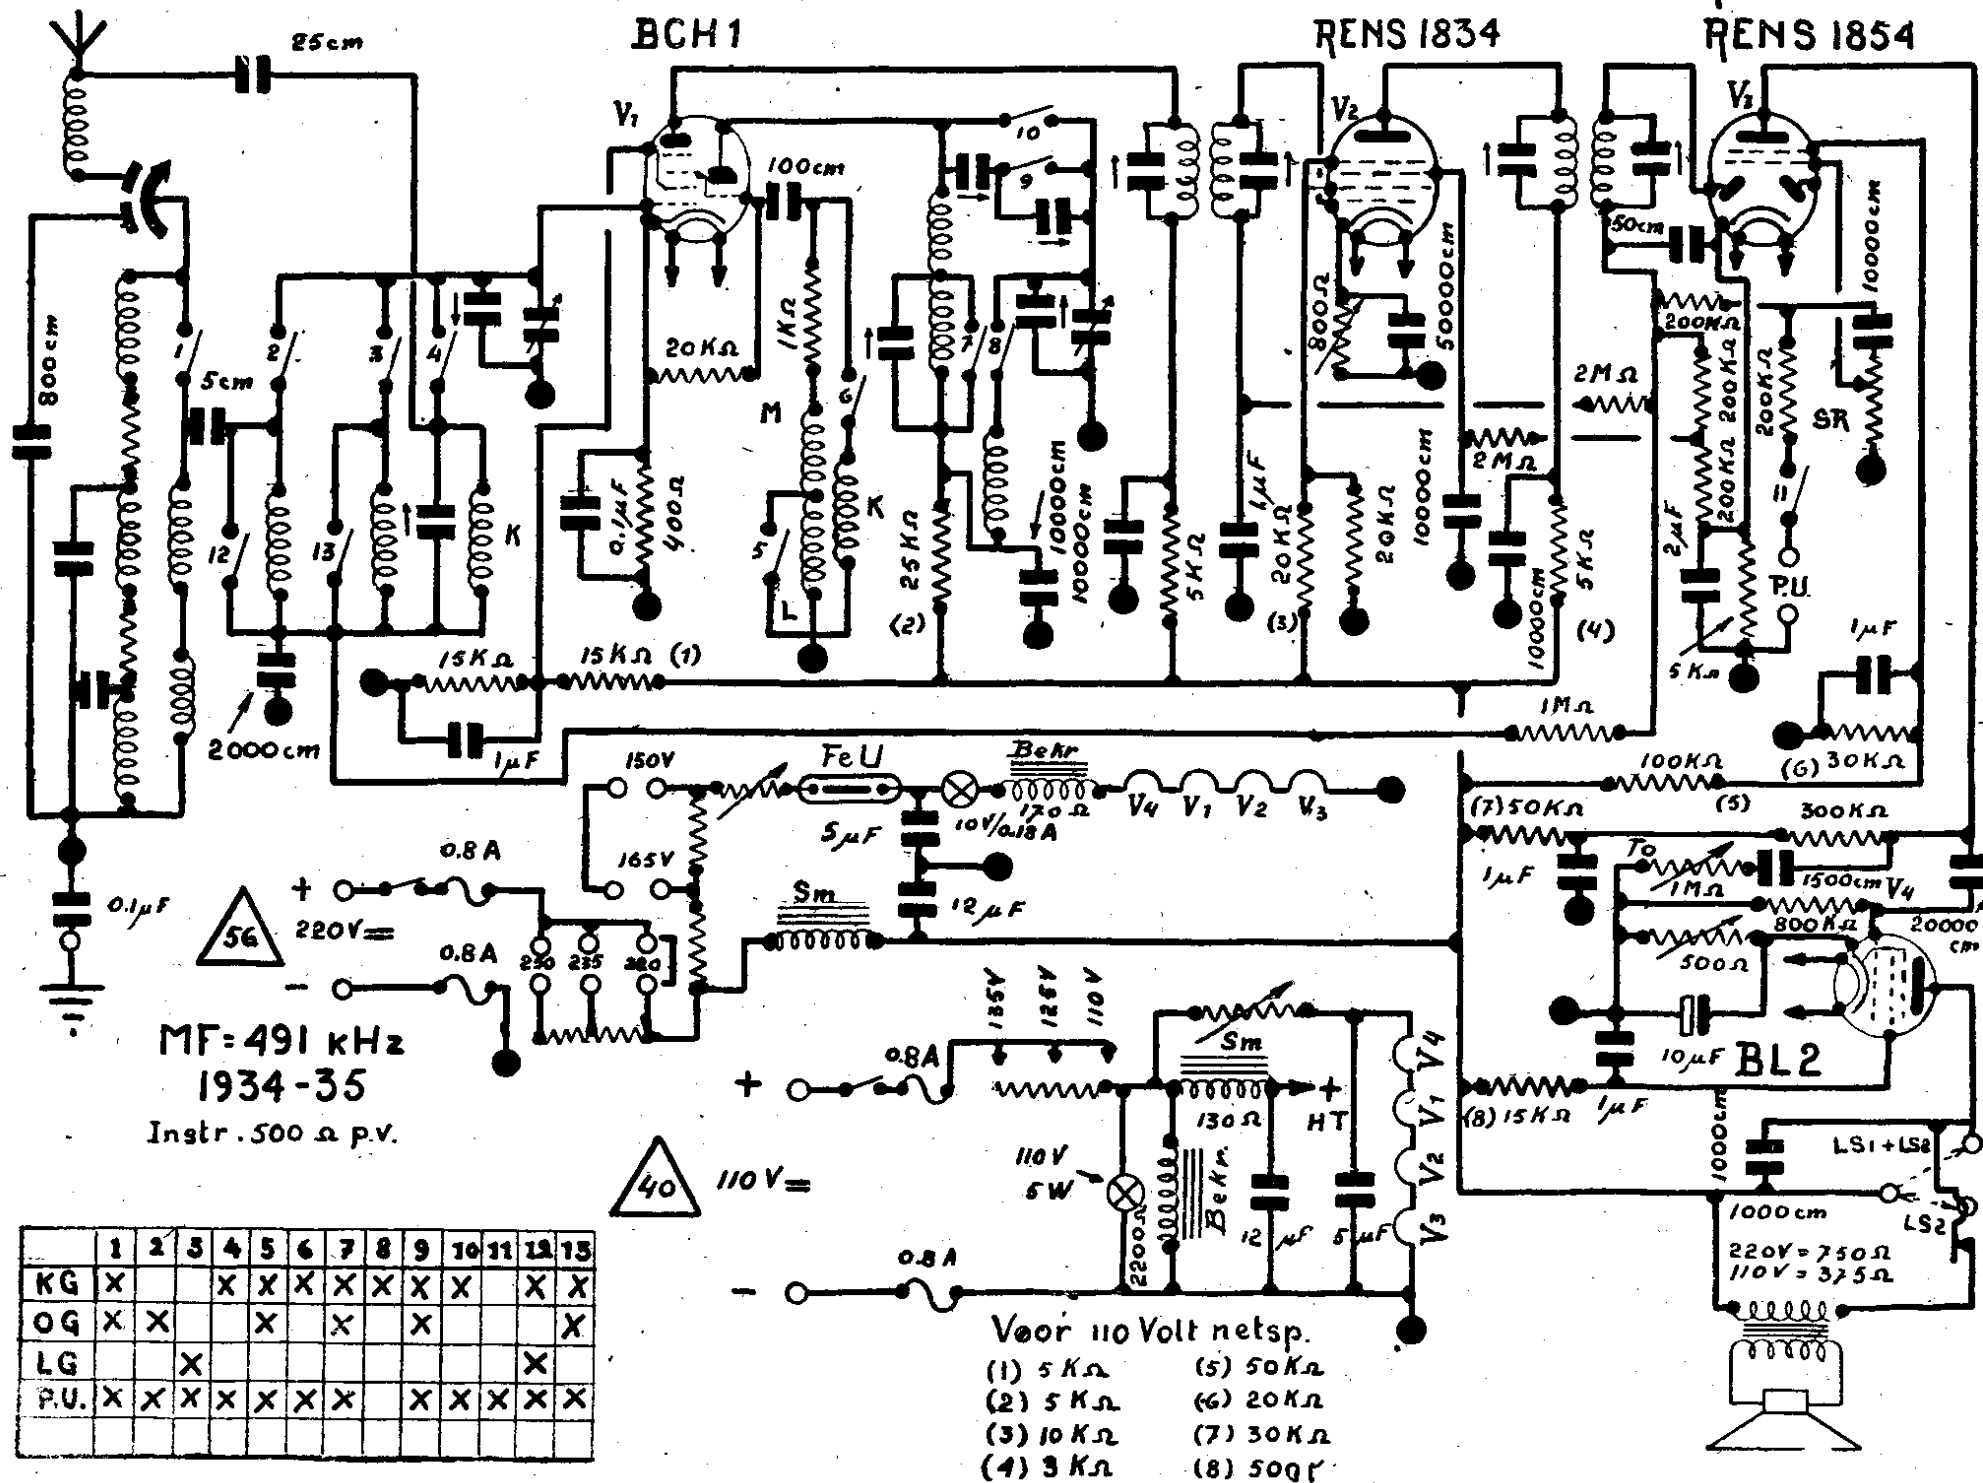


RENS 1854

[illegible]

	110 V.				220 V.			
	B C H 1	RENS 1834	RENS 1854	B L 2	B C H 1	RENS 1834	RENS 1854	B L 2
V _a	80	93	30	85	165	180	70	195
V _{g₁}	—4,5	—1,2	—1,5	—13	—5	—3,5	—2,5	—15
V _{g₂}	65	55	25	95	85	80	40	105
V _a osc	50—90(1)	—	—	—	50—115(2)	—	—	—
I _a	3,3	1,4	0,2	40	6,5	3	0,4	40
I _c	13,5	3,4	0,36	47	15	9,—	0,6	46
I _{sg}	2,—	2,—	0,16	7	2,5	6,—	0,18	6
I _a osc	8,—	—	—	—	6	—	—	—

(1) KG = 60-70 V. OG = 85-95 V. LG = 80-90 V. PU = 50 V.

(2) KG = 65 V. OG = 95 V. LG = 45 V. PU = 50 V.

Instr. 500 Ω p. v. 500 V.