


EF 50

ECH 35

EF 39

EBC 33

EL 33

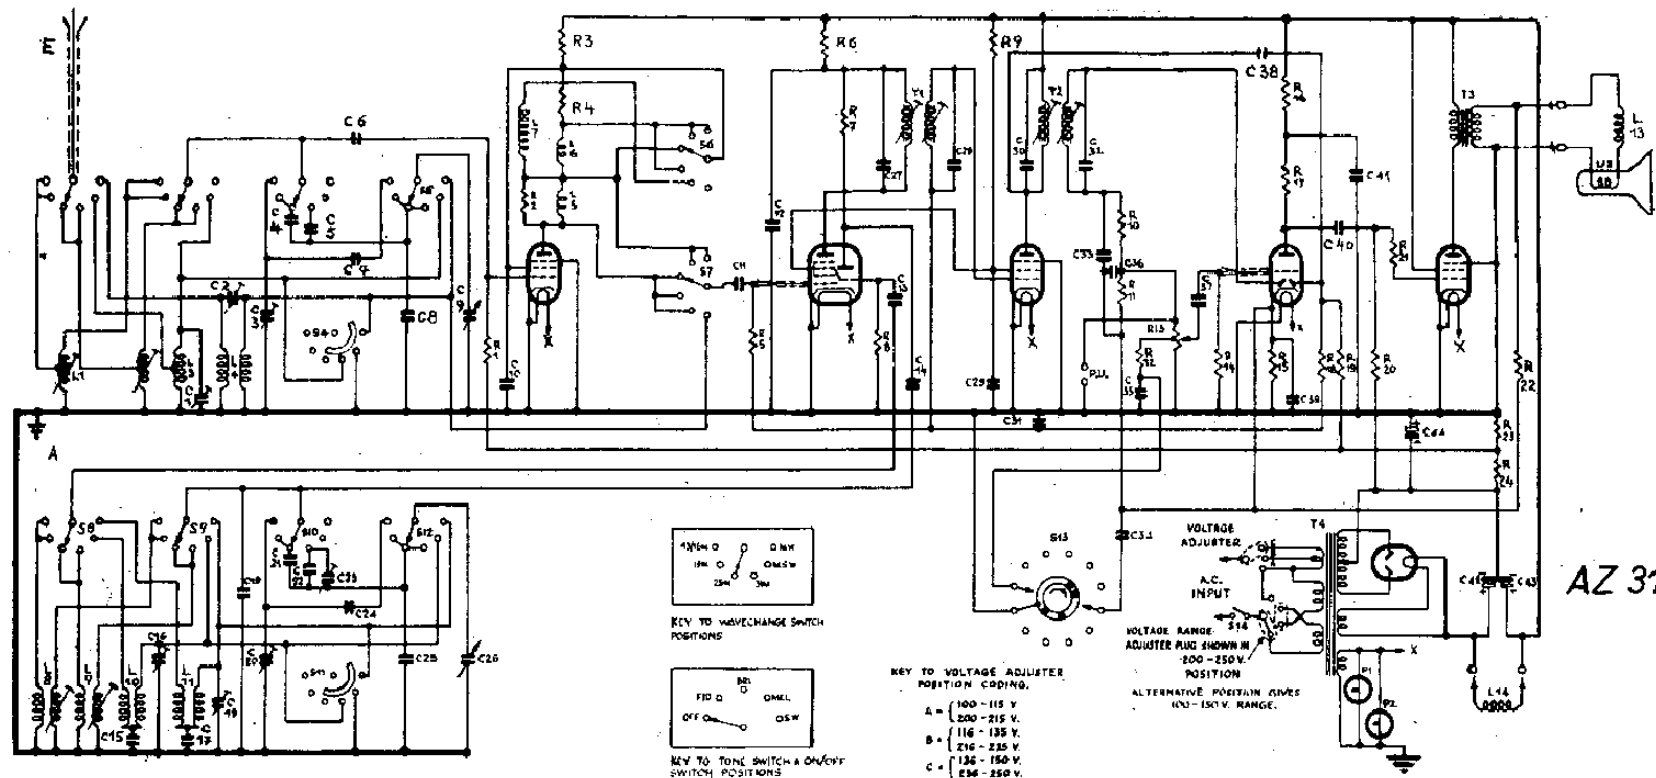

ZF = 465 kHz

## PYE MODEL 36H

CONDENSERS			RESISTORS			INDUCTANCES		
Fig.	No.	Specification	Fig.	No.	Specification	Fig.	No.	Specification
1	2	3.50 pF M.S.W. Aerial Trimmer	1	2	470,000	1	2	13-19 M. Aerial Coil
2	3	1.5-15 pF P.W. Aerial Trimmer	2	3	10,000	2	3	25-31 M. Aerial Coil
3	4	3-30 pF 16 Aerial Trimmer	3	4	1,000	3	4	M.S.W. Aerial Coil
4	5	100 pF Mica	4	5	1,000	4	5	M.W. Aerial Coil
5	6	100 pF Mica	5	6	270,000	5	6	R.F. Coil
6	7	100 pF Mica	6	7	2,200	6	7	R.F. Choke
7	8	50 pF Mica	7	8	47,000	7	8	13-19 M. Oscillator Coil
8	9	400 pF Mica	8	9	47,000	8	9	25-31 M. Oscillator Coil
9	10	5-40 pF Max. Gang Condenser	9	10	37,000	9	10	M.S.W. Oscillator Coil
10	11	0.5 pF Tubular 350 v.	10	11	680,013	10	11	M.W. Oscillator Coil
11	12	100 pF Mica	11	12	47,000	11	12	Speaker Speech Coil
12	13	1 pF Tubular 350 v.	12	13	47,000	12	13	Horn Backing Coil
13	14	47 pF Mica	13	14	47,000	13	14	Speaker Field Coil
14	15	100 pF Mica	14	15	47,000			
15	16	2500 pF Mica	15	16	470			
16	17	1.5-15 pF M.S.W. Oscillator Trimmer	16	17	10,000			
17	18	50 pF Mica	17	18	47,000			
18	19	3-50 pF M.W. Oscillator Trimmer	18	19	47,000			
19	20	15 pF Ceram. Disc	19	20	270,000			
20	21	1.5-15 pF 16 Oscillator Trimmer	20	21	22,000			
21	22	100 pF Mica	21	22	1,500			
22	23	100 pF Mica	22	23	27			
23	24	3-50 pF 31 M. Oscillator Trimmer	23	24	58			
24	25	53 pF Mica	24	25	58			
25	26	400 pF Mica	25	26	58			
26	27	540 pF Max. Gang Condenser	26	27	58			
27	28	140 pF Mica	27	28	58			
28	29	140 pF Mica	28	29	58			
29	30	140 pF Mica	29	30	58			
30	31	0.5 pF Tubular 350 v.	30	31	58			
31	32	140 pF Mica	31	32	58			
32	33	100 pF Mica	32	33	58			
33	34	25 pF Tubular 350 v.	33	34	58			
34	35	0.1 pF Tubular 500 v.	34	35	58			
35	36	100 pF Mica	35	36	58			
36	37	0.02 pF Tubular 500 v.	36	37	58			

CALIBRATION CHART