


Service
Service
Service

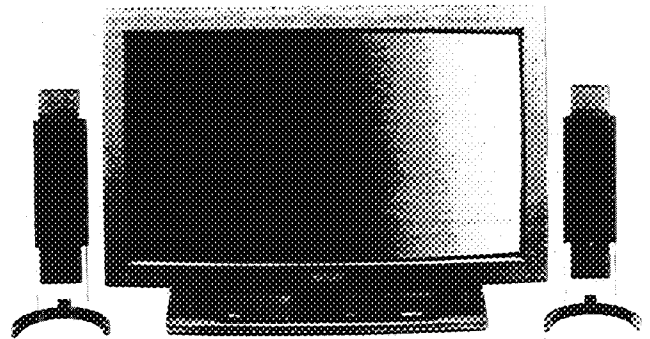




45 834 A

Service Manual

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified be used.

Les normes de sécurité exigent que l'appareil soit remis à l'état d'origine et que soient utilisées les pièces de rechange identiques à celles spécifiées.

Chassis FL1.2

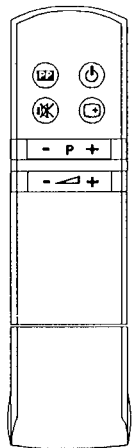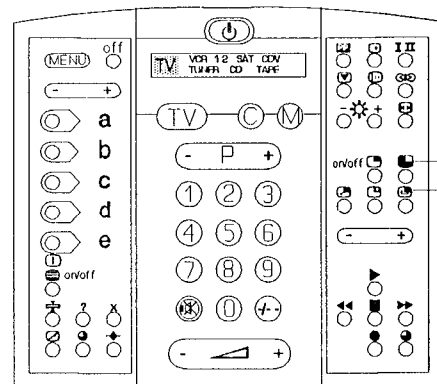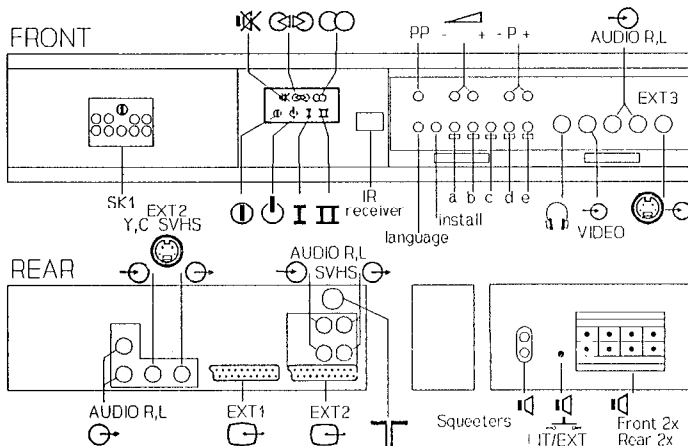


RC6411

RC6804



220-240 V ($\pm 10\%$)
163W Cenelec

W67EWS001X42



a x b x c
692x515x512 mm



2 x 20 W
2 x squeeeter 8 Ω
1 x subwoofer 8 Ω



Front 2 x 16 W/8 Ω
Rear 2 x 4 W/8 Ω



28ML8916/05

PAL I

28ML8916/00/10/13

PAL BG
SECAM BGL
NTSC M

28ML8916/19

PAL BGI
SECAM BGLL'


-/05/10/13

NICAM

	FOB44/IF	FOB16/ME/IF	FOB16/ME/IF	OPTION 1	OPTION 2	OPTION 3
28ML8916/00B		X		018	005	000
28ML8916/05B	X			065	037	000
28ML8916/10B	X			082	037	000
28ML8916/13B	X			082	037	000
28ML8916/19B		X		084	005	000




PHILIPS

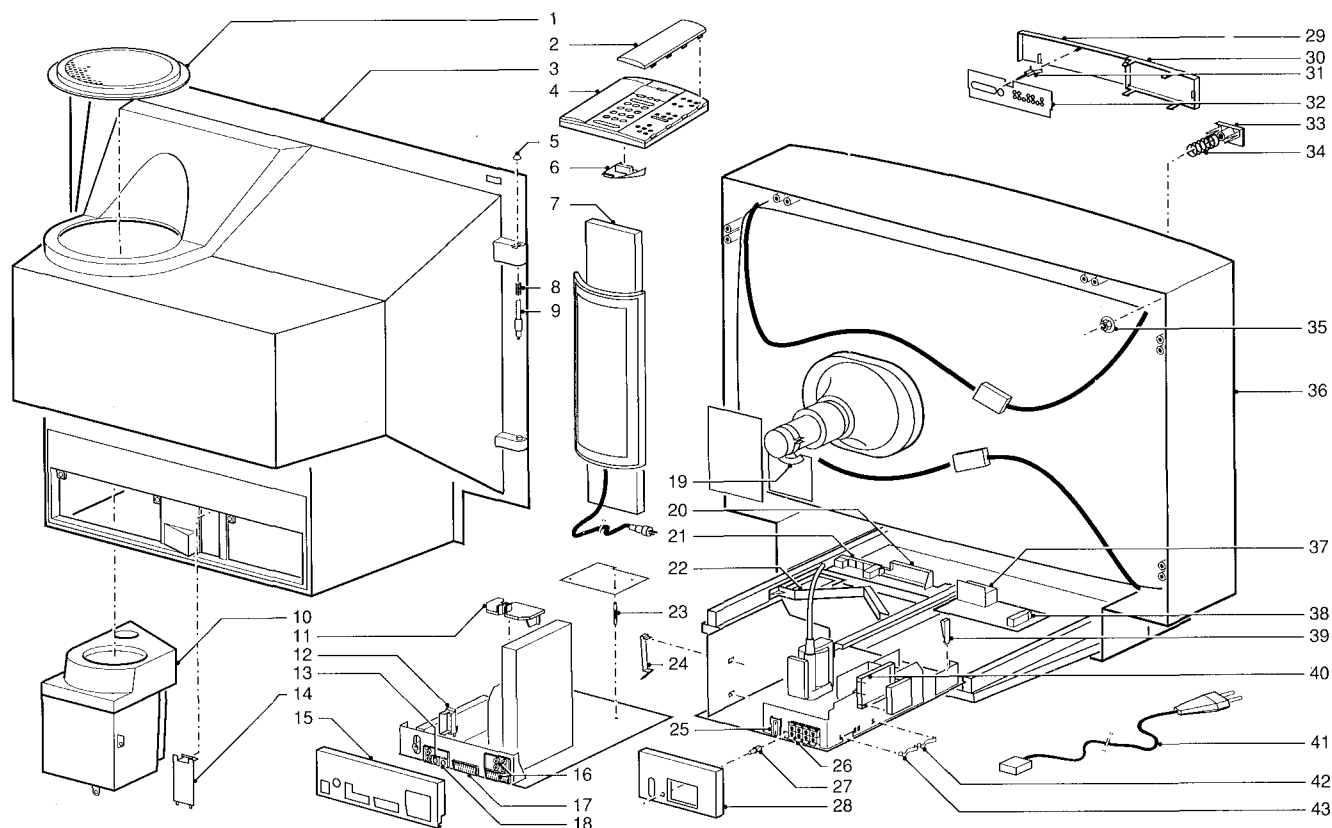

28ML8916
CL 26532029/011
090392

1	4822 462 71765	Grill for subwoofer	30	4822 432 92794	Window
2	4822 432 92716	Door right	31	4822 417 50258	Locking unit
3	4822 438 40223	Backcover	32	4822 454 12733	Ornamental plate
4	4822 432 92715	Door left	33	4822 410 61499	Mains knob
5	4822 462 41813	Cap for hinge	34	4822 492 32656	Spring
6	4822 432 92714	Battery lid	35	4822 505 10903	Nut
7	4822 445 10282	LS box squeeter	36	4822 430 50821	Cabinet
8	4822 492 52247	Spring for hinge	37	4822 466 93002	LED block
9	4822 535 93227	Pin for hinge	38	4822 276 12998	Mains switch
10	4822 445 10283	LS box subwoofer	39	4822 492 62076	Spring
11	not present		40	4822 404 31202	Bracket for DAF unit
12	not present		41	4822 321 10736	Mains cord
13	4822 267 41005	Cinch/SVHS connector	41	4822 321 10566	Mains cord for -/05
14	4822 432 92693	Door in backcover	42	4822 492 70143	Spring
15	4822 432 92767	Cover SSP	43	4822 492 70788	Spring
16	4822 267 20427	Euro/cinch connector		4822 502 12865	Spindle
17	4822 267 51058	Euroconnector		4822 404 31167	Bracket for mains cord
19	4822 403 70584	Bracket		4822 404 31205	Bracket fix deg. coils
20	4822 218 21075	Keyboard		4822 466 62142	Prot. plate mains filter
21	4822 267 41004	Headph./cinch/SVHS conn.		4822 157 63844	Degaussing coil
22	4822 432 10917	Bottom plate		4822 462 10509	Stand for squeeter box
	4822 535 71305	Spacer for control panel		4822 131 20461	Picture tube
23	4822 404 31197	Spacer		4822 218 21021	Remote control RC6411
24	4822 492 70789	Spring		4822 218 21026	Remote control RC6804
25	4822 267 20417	Socket 2P			
26	4822 290 60812	Connector for LS			
27	4822 410 25036	Mute knob			
28	4822 432 92743	Cover LSP			

Service
Service
Service

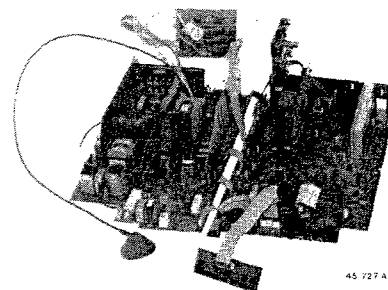


Service Manual

Contents

Page

1.	Block diagram and technical data	1.2
2.	Connection facilities	2.1
3.	Warnings and notes	3.1
4.	Mechanical instructions	4.1
5.	Detailed block diagram	5.1
6.	Electrical diagrams and PCB layouts	
	Power supply (Diagram A)	6.1
	Field and line output stage (Diagram B)	6.10
	Tuner, Source selection (Diagram C)	6.13
	Video processing (Diagram D)	6.22
	PIP module (Diagram J)	6.25
	Picture tube panel (Diagram E)	6.30
	SCAVEM filter (Diagram Y)	6.32
	SCAVEM amplifier (Diagram Z)	6.33
	Operation (Diagram H)	6.34
	Sound processing (Diagram F)	6.36
	Sound output amplifier (Diagram E)	6.44
	NICAM module (Diagram K)	6.46
	High-End box (Diagram L)	6.50
	High-End box (Diagram M)	6.54
7.	Electrical settings	7.1
8.	List of error messages and repair tips	8.1
9.	List of menus	9.1
10.	Electrical parts lists	10.1

Blockdiagram

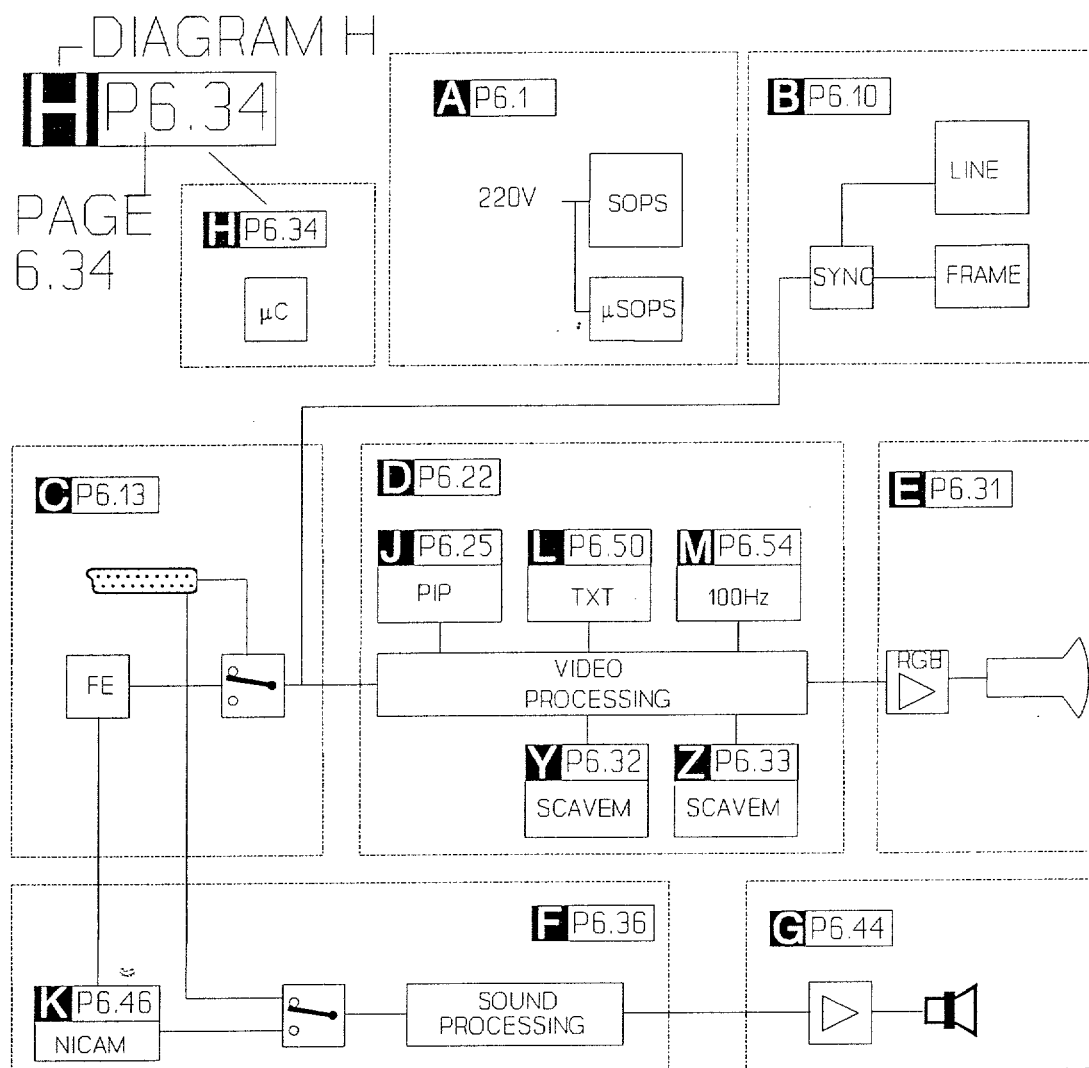


Technical data

Mains voltage:	220 - 240 V (± 10%) 50 - 60 Hz (± 5%)
Aerial input impedance:	75Ω - coax
Minimum aerial voltage:	30μV (VHF)/40μV (UHF)
Maximum aerial voltage VHF/S/UHF:	180μV
Pull-in range colour synchronization:	+ 300Hz/-300Hz
Pull-in range horizontal synchronization:	+ 200Hz/-300Hz

Programmes:	0-59
VCR programmes:	0, 00, 50-59


Local operation functions:

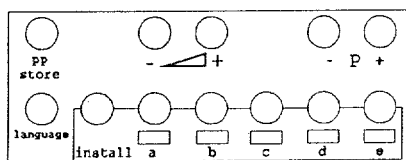

Indications:


- On Screen Display (OSD)

- LED:



1. Specification of the connectors


EXT1 (AUX)



- 1 - Audio $\oplus$ R (0,5V RMS $\leq$ 1k Ω)
- 2 - Audio $\ominus$ R (0,2 - 2V RMS $\geq$ 10k Ω)
- 3 - Audio $\oplus$ L (0,5V RMS $\leq$ 1k Ω)
- 4 - Audio $\ominus$ L
- 5 - Blue $\perp$
- 6 - Audio $\ominus$ L (0,2 - 2V RMS $\geq$ 10k Ω)
- 7 - Blue (0,7V_{pp}/75 Ω)
- 8 - CVBS-status 1 $\ominus$ 0- 2V: int.
4,5-7V: ext.16:9
9,5-12V: ext. 4:3
- 9 - Green $\perp$
- 10 - -
- 11 - Green (0,7V_{pp}/75 Ω)
- 12 - -
- 13 - Red $\perp$
- 14 - -
- 15 - Red (0,7V_{pp}/75 Ω)
- 16 - RGB-status (0-0,4V: int. 1-3V ext. 75 Ω)
- 17 - CVBS $\perp$
- 18 - CVBS $\perp$
- 19 - CVBS $\oplus$ (1V_{pp}/75 Ω)
- 20 - CVBS $\ominus$ (1V_{pp}/75 Ω)
- 21 - Earthscreen



EXT2 (VCR)



- 1 - Audio $\oplus$ R (0,5V RMS $\leq$ 1k Ω)
- 2 - Audio $\ominus$ R (0,2 - 2V RMS $\geq$ 10k Ω)
- 3 - Audio $\oplus$ L (0,5V RMS $\leq$ 1k Ω)
- 4 - Audio $\ominus$ L
- 5 - -
- 6 - Audio $\ominus$ L (0,2 - 2V RMS $\geq$ 10k Ω)
- 7 - -
- 8 - CVBS-status 2 $\ominus$ 0- 2V: int.
4,5-7V: ext.16:9
9,5-12V: ext. 4:3
- 9 - -
- 10 - -
- 11 - -
- 12 - -
- 13 - -
- 14 - -
- 15 - -
- 16 - -
- 17 - CVBS $\perp$
- 18 - CVBS $\perp$
- 19 - CVBS $\oplus$ (1V_{pp}/75 Ω)
- 20 - CVBS $\ominus$ (1V_{pp}/75 Ω)
- 21 - Earthscreen



EXT3 (front)



- 1 - $\perp$
- 2 - $\perp$
- 3 - Y $\ominus$ (1V_{pp}; 75 Ω)
- 4 - C $\ominus$ (0,3V_{pp}; 75 Ω)

- $\odot$ CINCH Video $\ominus$ 300mV_{pp}/75 Ω
- $\odot$ CINCH Audio $\ominus$ L (0,5V RMS; $\geq$ 10k Ω)
- $\odot$ CINCH Audio $\ominus$ R (0,5V RMS; $\geq$ 10k Ω)
- $\odot$ 3.5mm $\perp$ 32-2000 Ω $\geq$ 10mW

Audio out

- $\odot$ CINCH Audio $\oplus$ L (0,5V RMS; $\leq$ 1k Ω)
- $\odot$ CINCH Audio $\oplus$ R (0,5V RMS; $\leq$ 1k Ω)



front : 2 x 16W / 8 Ω
rear : 2 x 6W / 8 Ω

EXT2' (SVHS)



- 1 - $\perp$
- 2 - $\perp$
- 3 - Y $\ominus$ (1V_{pp}; 75 Ω)
- 4 - C $\ominus$ (0,3V_{pp}; 75 Ω)

- $\odot$ CINCH Audio $\ominus$ L (0,5V RMS; $\geq$ 10k Ω)
- $\odot$ CINCH Audio $\ominus$ R (0,5V RMS; $\geq$ 10k Ω)



- 1 - $\perp$
- 2 - $\perp$
- 3 - Y $\ominus$ (1V_{pp}; 75 Ω)
- 4 - C $\ominus$ (0,3V_{pp}; 75 Ω)

- $\odot$ CINCH Audio $\ominus$ L (0,5V RMS; $\leq$ 1k Ω)
- $\odot$ CINCH Audio $\ominus$ R (0,5V RMS; $\leq$ 1k Ω)

2. Connection of equipment

When an SVHS source is connected to EXT2'(SVHS) or EXT3 (SVHS) the CVBS at these inputs is switched off. To reproduce the CVBS signal from these inputs, the particular SVHS plug must first be removed.

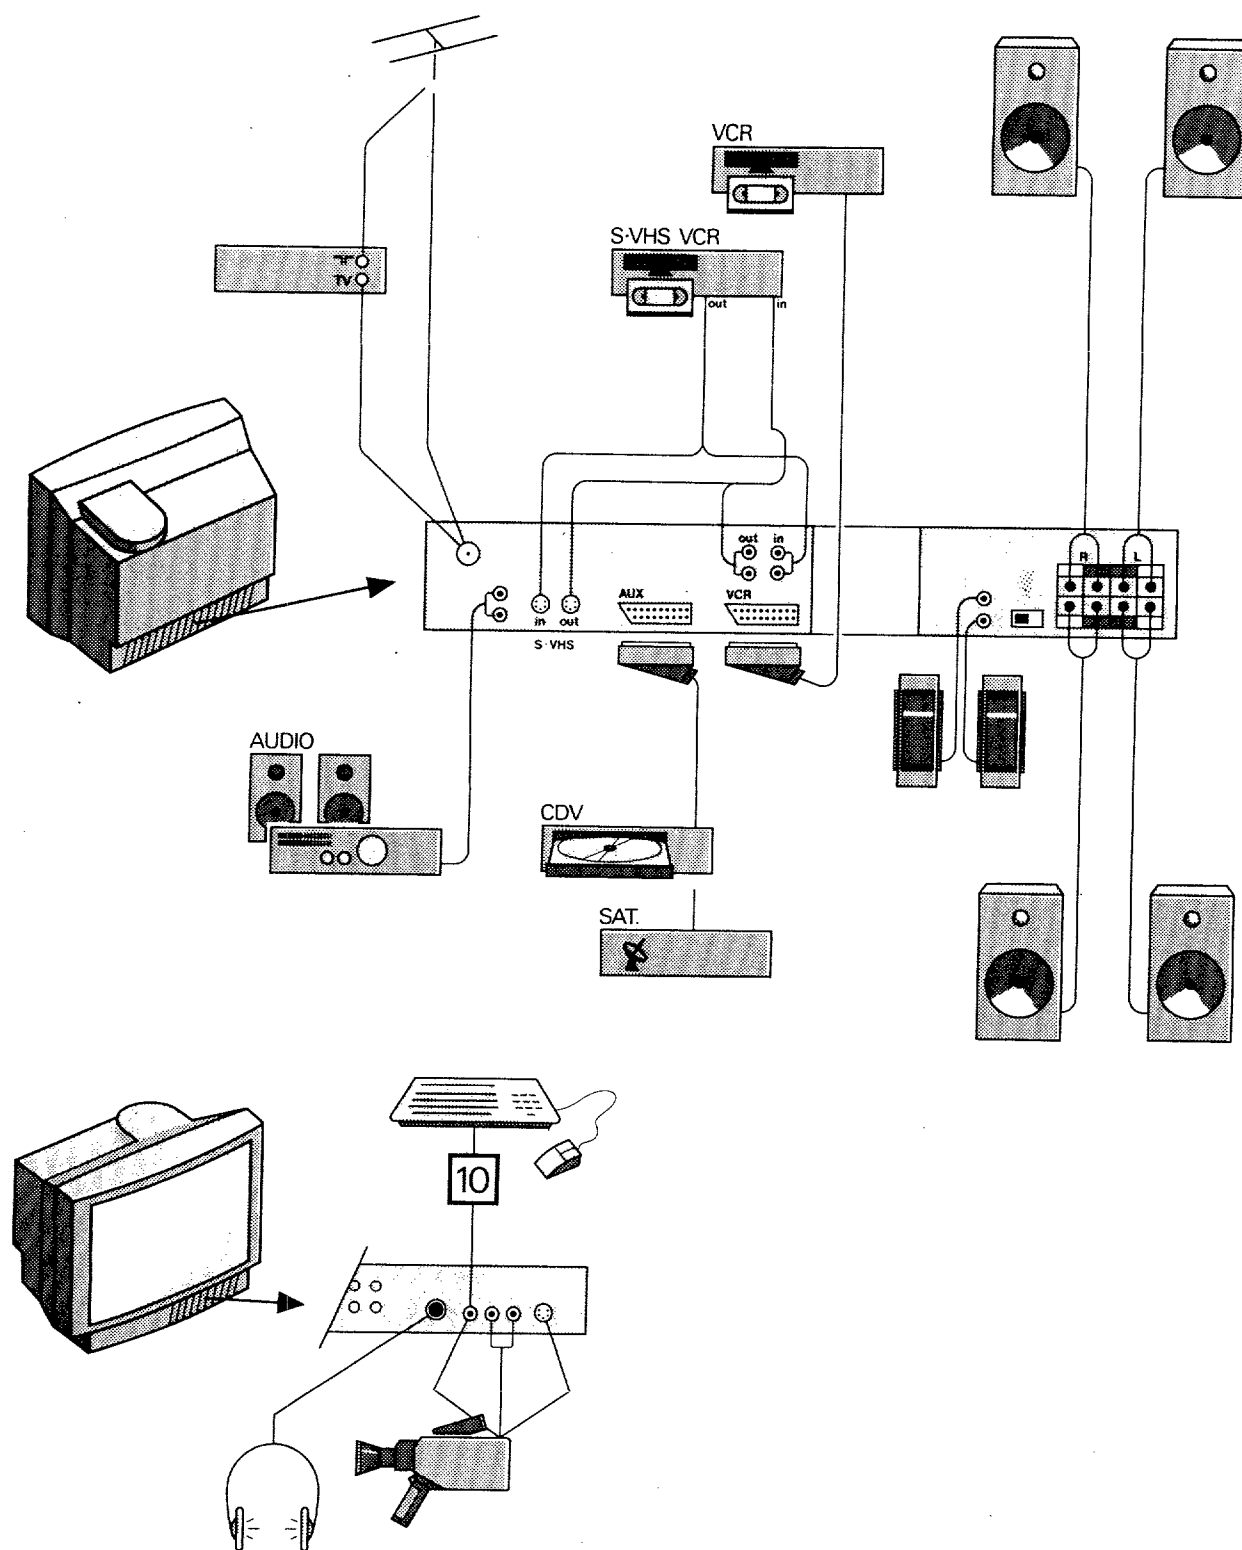


Fig. 2.1

Warnings

1. Safety regulations require that the unit should be returned in its original condition and that components identical to the original components are used. The safety components are indicated by the symbol .
2. In order to prevent damage to ICs and transistors, all high-voltage flashovers must be avoided. In order to prevent damage to the picture tube, the method shown in Fig. 3.1 should be used to discharge the picture tube. Use a high-voltage probe and a multimeter (position DC-V). Discharge until the meter reading is 0V (after approx. 30s).
3. **ESD** 
All ICs and many other semiconductors are sensitive to electrostatic discharges (ESD). Careless handling during repair can drastically shorten the life. Make sure that during repair you are connected by a pulse band with resistance to the same potential as the earth of the unit. Keep components and tools also at this same potential.
4. When repairing a unit, always connect it to the mains voltage via an isolating transformer.
5. Be careful when taking measurements in the high-voltage section and on the picture tube.
6. Never replace modules or other components while the unit is switched on.
7. It is recommended that safety goggles are worn when replacing the picture tube.
8. When making settings, use plastic rather than metal tools.
This will prevent any short circuits and the danger of a circuit becoming unstable.
9. After repair the wiring should be fastened once more in the cable clamps for this purpose.
10. In order to prevent measuring errors, the heat sinks should not be used as reference points for measurements.
The heat sink for the sound output amplifier (next to the channel selector) is connected to the -11 volts.
11. On this unit the 140 volt supply voltage is not supplied via an interconnection on the deflection yoke to the line output transformer. When the deflection cable is detached, the +140 volt supply remains loaded. In order to unload the +140 volts, coil 5511 should be removed.
12. Together with the deflection unit and any multipole unit, the flat square picture tubes used form an integrated unit. The deflection and the multipole units are set optimally at the factory. Adjustment of this unit during repair is therefore not recommended.

Notes

CHASSIS FL1.2

3.1

4

1. The direct voltages and oscillograms should be measured with regard to the tuner earth ($\perp$), or hot earth ($\perp$) as this is called.
2. The direct voltages and oscillograms shown in the diagrams should be measured in the **Service Default Mode** (see chapter 8) with a colour bar signal and stereo sound (L: 3 kHz, R: 1 kHz unless stated otherwise) and picture carrier at 475.25 MHz.
3. Where necessary, the oscillograms and direct voltages are measured with ($\perp$) and without aerial signal ($\times$). Voltages in the power supply section are measured both for normal operation ($\textcircled{D}$) and in standby ($\textcircled{S}$). These values are indicated by means of the appropriate symbols.
4. The picture tube PCB has printed spark gaps. Each spark gap is connected between an electrode of the picture tube and the Aquadag coating.
5. The semiconductors indicated in the circuit diagram and in the parts lists are completely interchangeable per position with the semiconductors in the unit, irrespective of the type indication on these semiconductors.
6. The connectors used for the modules (board to board) are gold-plated and should only be replaced by the same type.
7. In the case of error searching and/or repair to the PIP module, the accessibility of the circuit and the components can be increased by using extension cards.
5 times: 4822 395 30261
10 times: 4822 395 30257

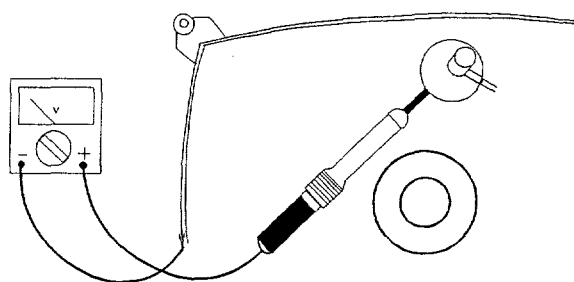


Fig 3.1

Mechanical instructions

1. Removing the back plate

Remove cover A (Fig. 4.1) from the back plate.
Remove connector B (LI36) of the subwoofer.
Remove attachment screws C from the back plate.
Remove the back plate with the subwoofer fitted in it. Attach the back plate by carrying out the above in the reverse order.

2. Service position to measure test points (Fig. 4.2)

Unlock the chassis panels by pressing locks D.
Pull both chassis panels backwards at the same time until all measuring points are accessible.

3. Service position for repair (Fig. 4.3)

Remove the LED display E (see Fig. 4.2) of the large signal panel.
Tilt the back of the two panels and attach both panels using brackets F situated on the underside of the small signal panel, at an angle of 90° to one another.

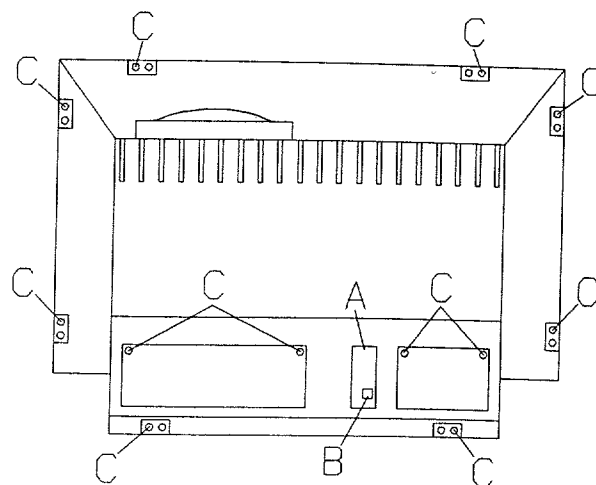


Fig 4.1

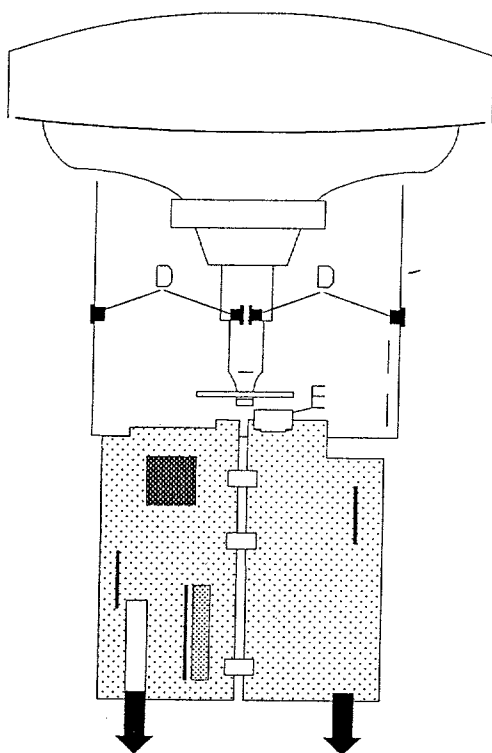


Fig 4.2



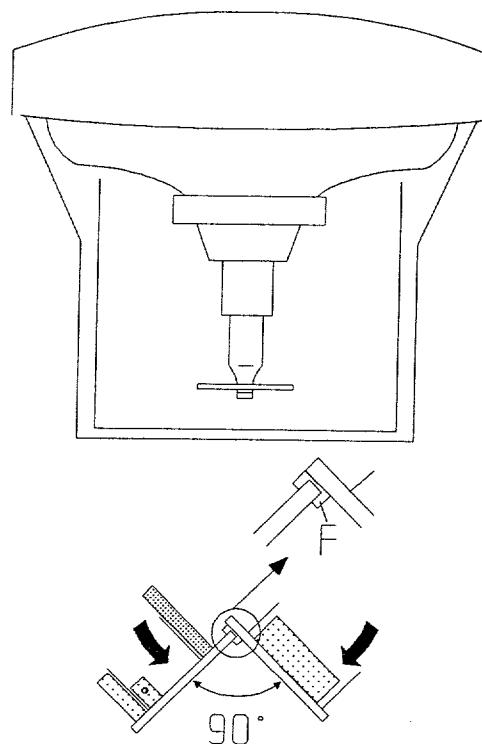


Fig 4.3

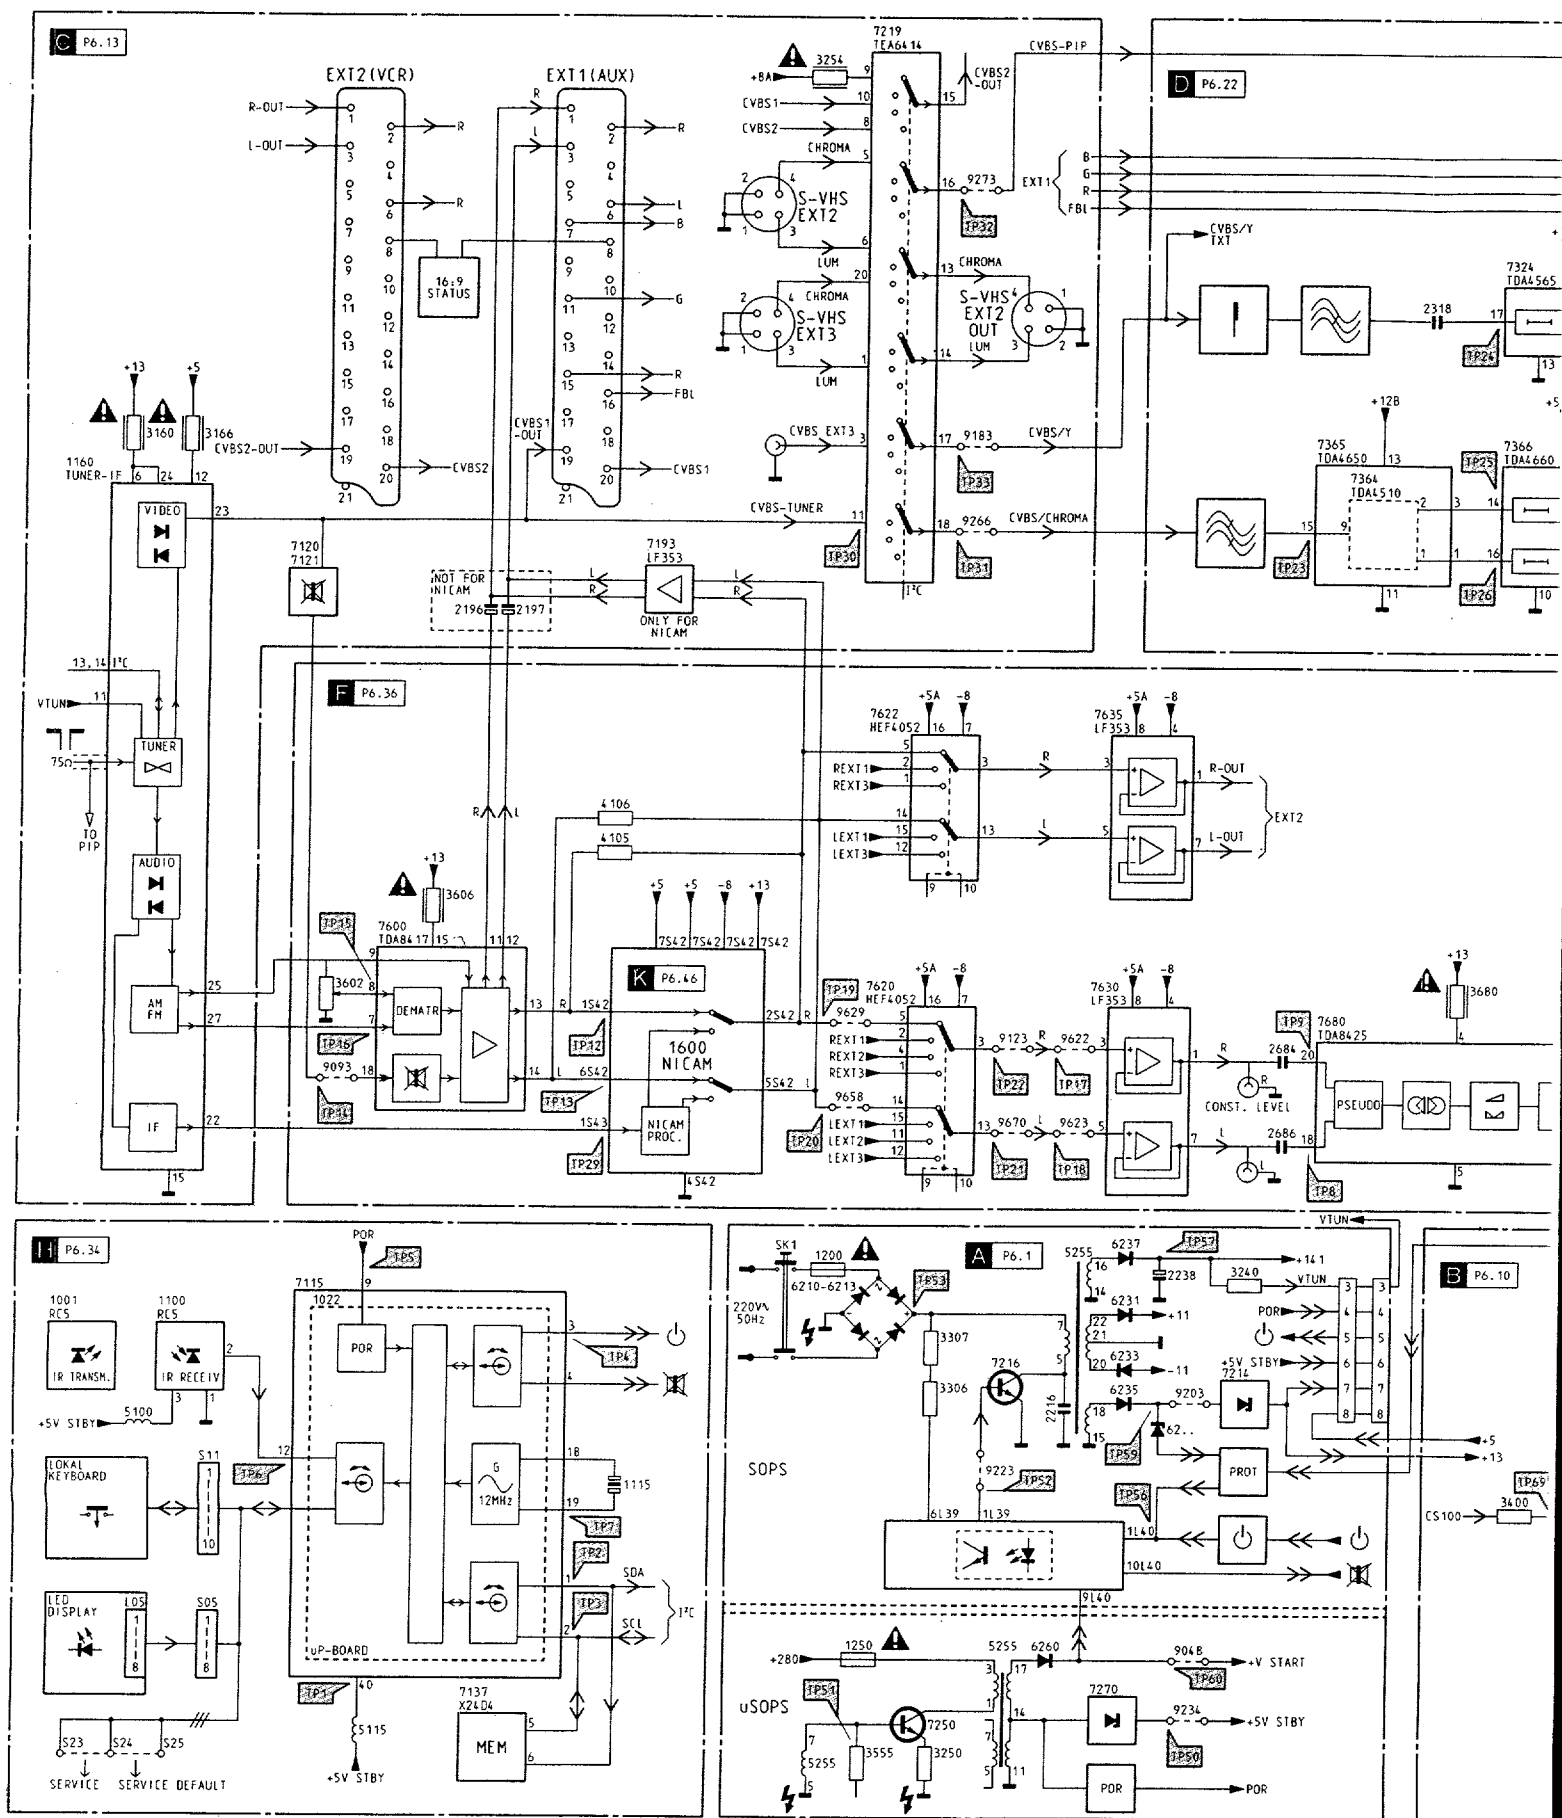

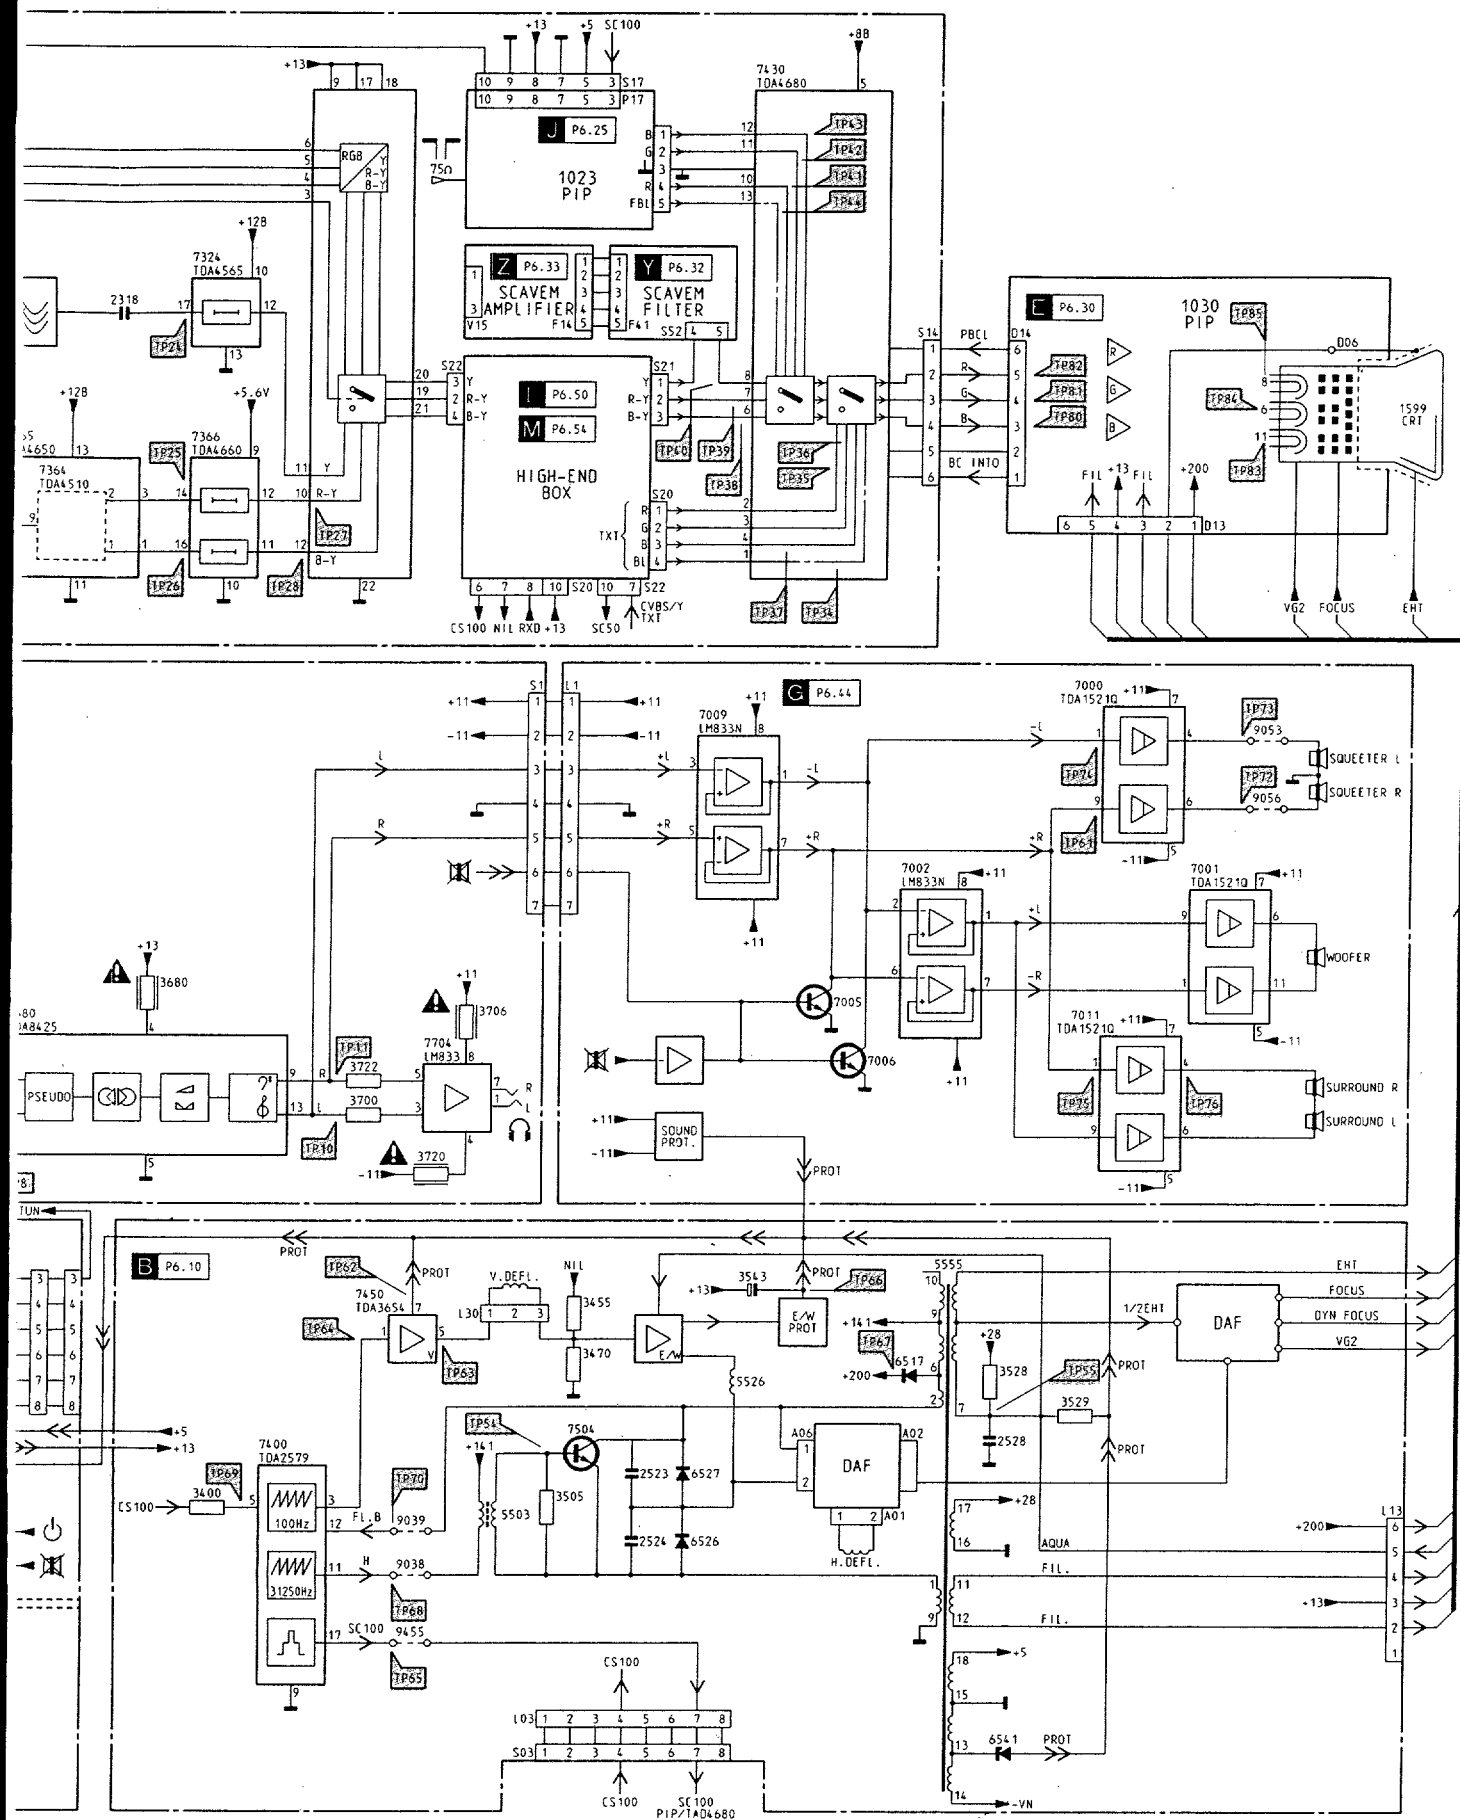


Small signal panel
Klein-signal Platte
Platine petits signaux


CHASSIS FL1.2

5.3

5.4


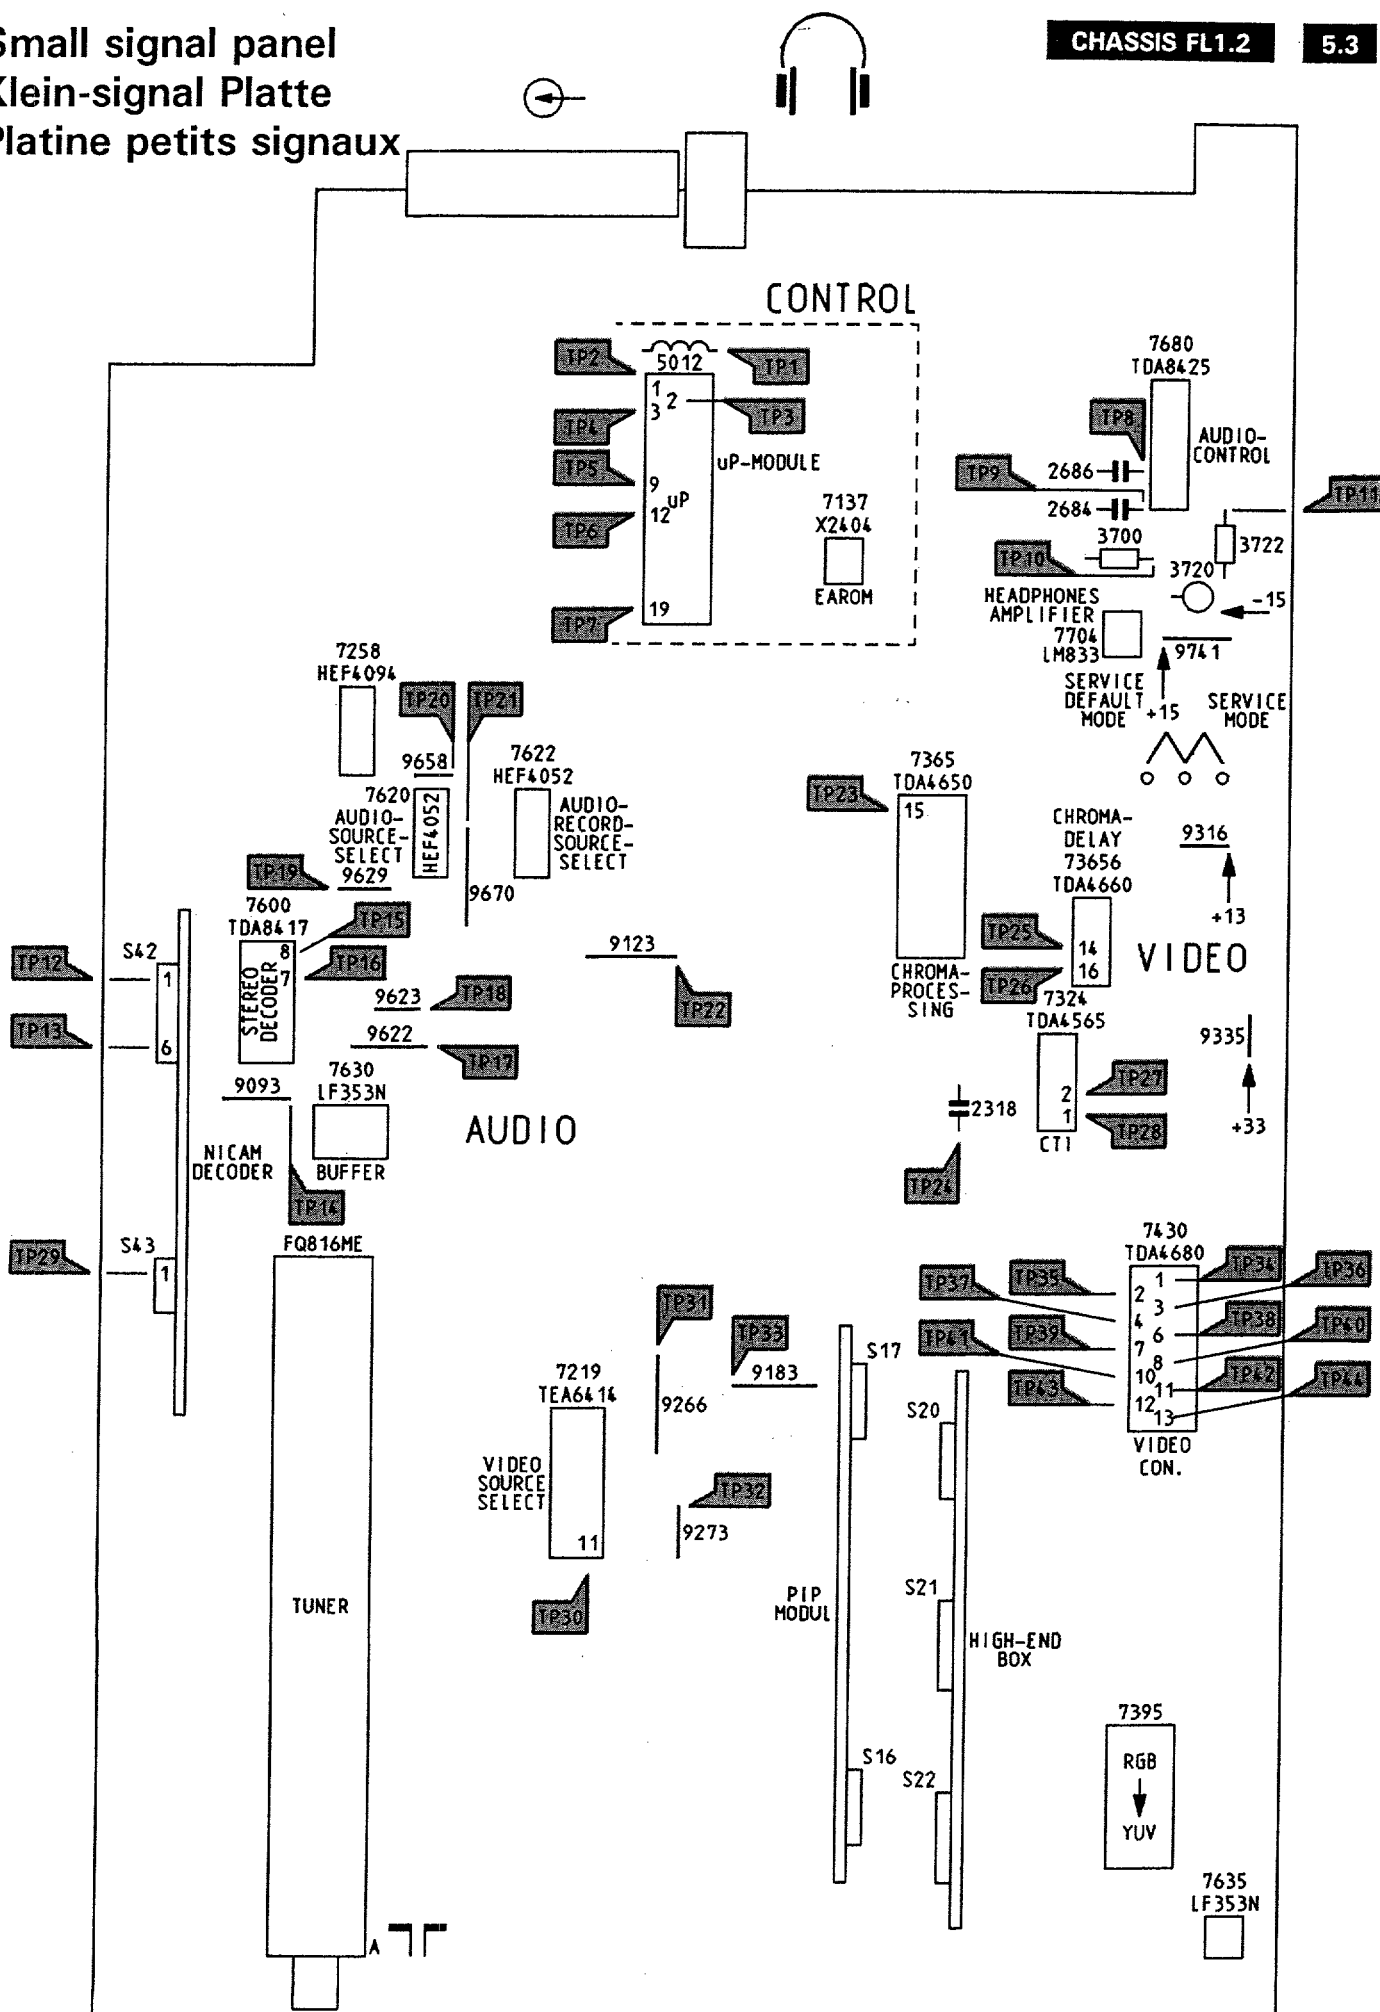



16532009/012.X001
260391

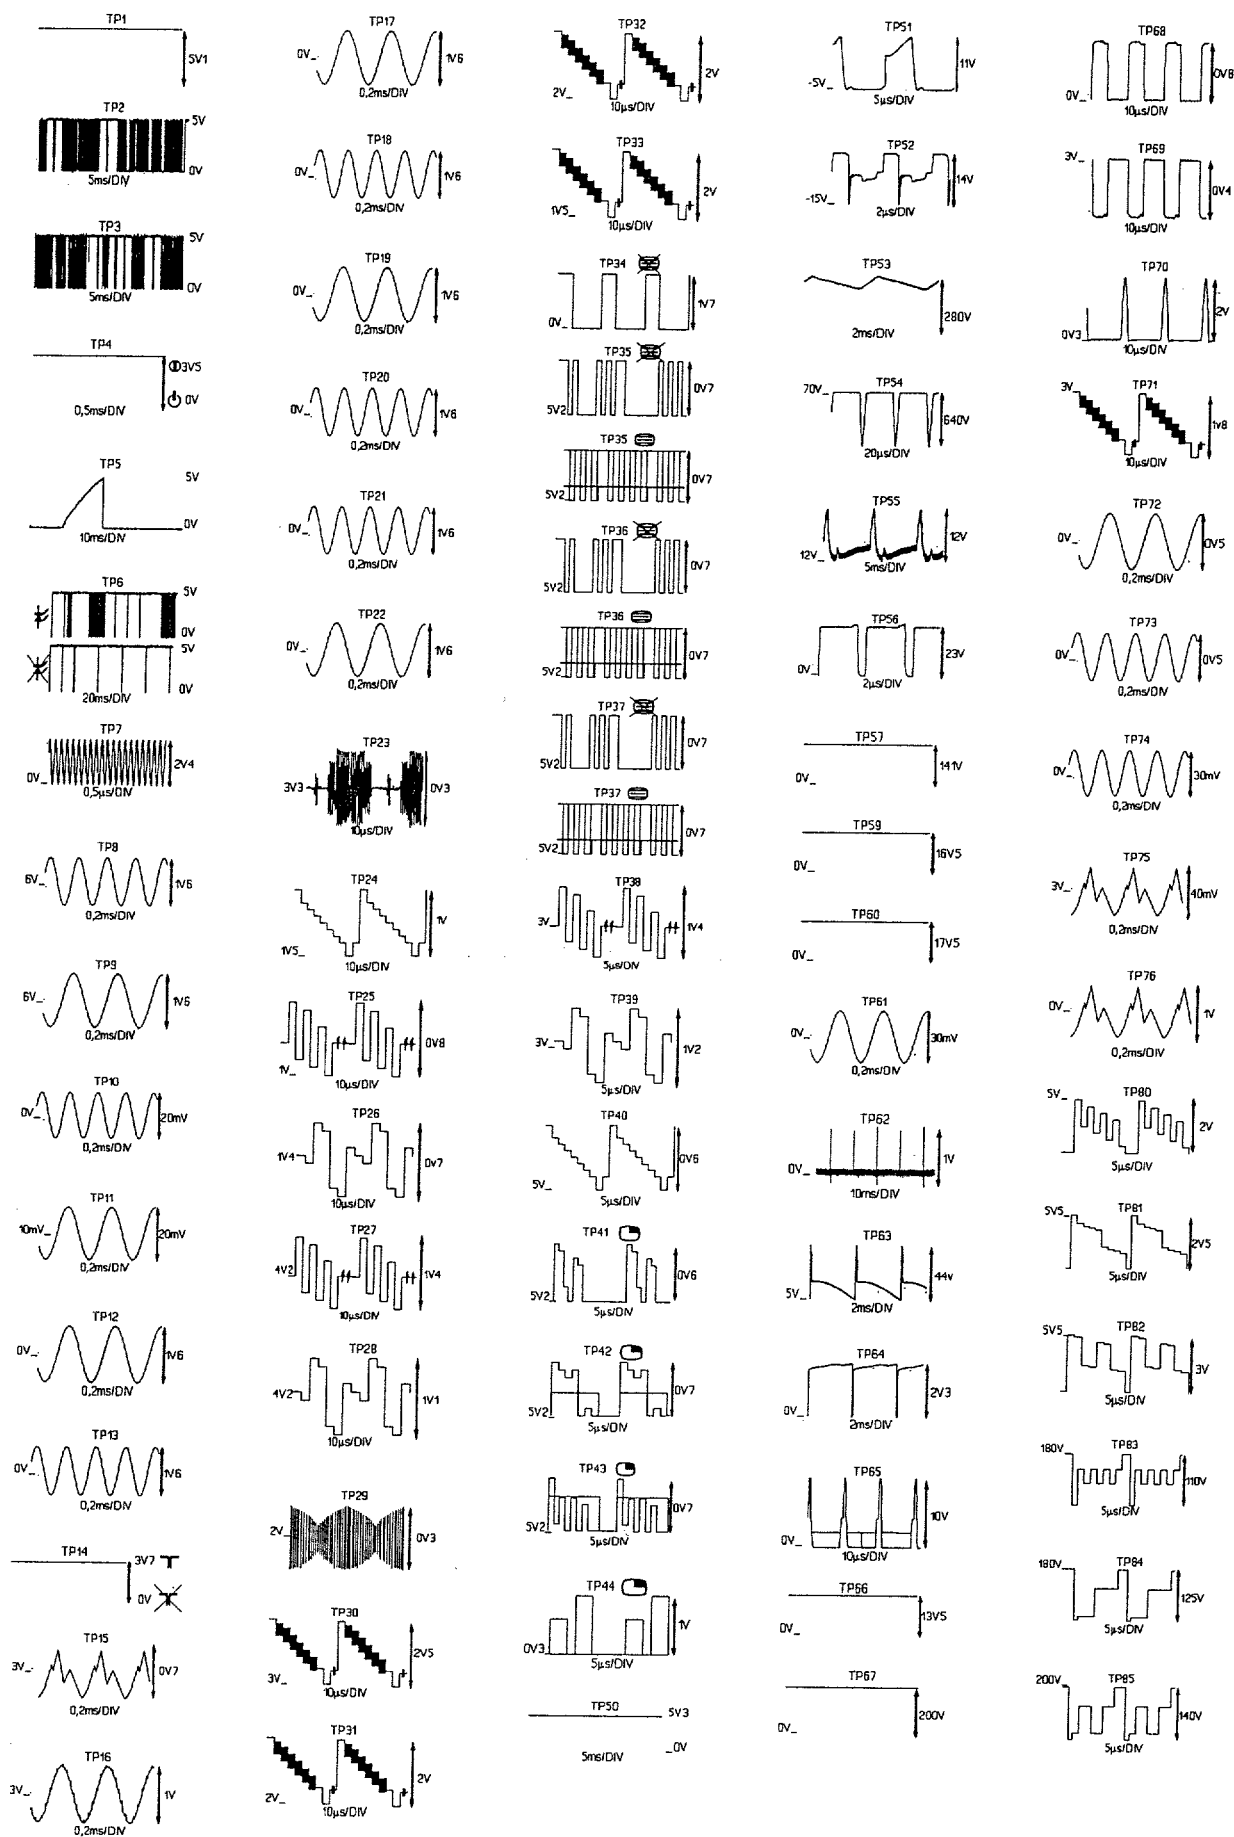


6.3 CHASSIS FL1.2


6352 I14
6353 I14
6372 K14
6373 K14
6375 G11
6376 H11
7201 N 6
7216 F 8
7241 E13
7242 F13
7243 F13
7246 H15
7250 N 7
7251 N 8
7268 N12
7270 M13
7272 O16
7273 O14
7321 I 8
7380 H12
7381 H13
7384 H14
9019 G16
9204 A 4
9205 B 6
9206 C 6
9207 B 3
9208 C 3
9218 B 5
9219 M10
9223 H 7
9231 A10
9232 B10
9235 E10
9239 N10
9242 A 6
9243 D10

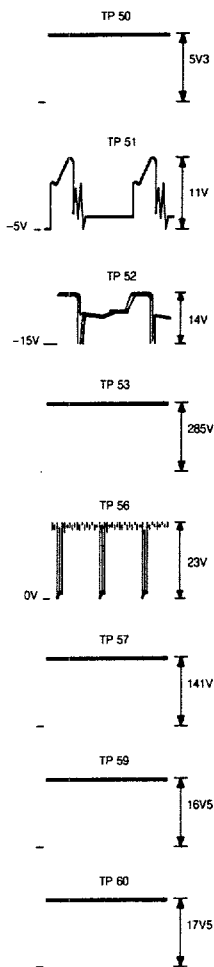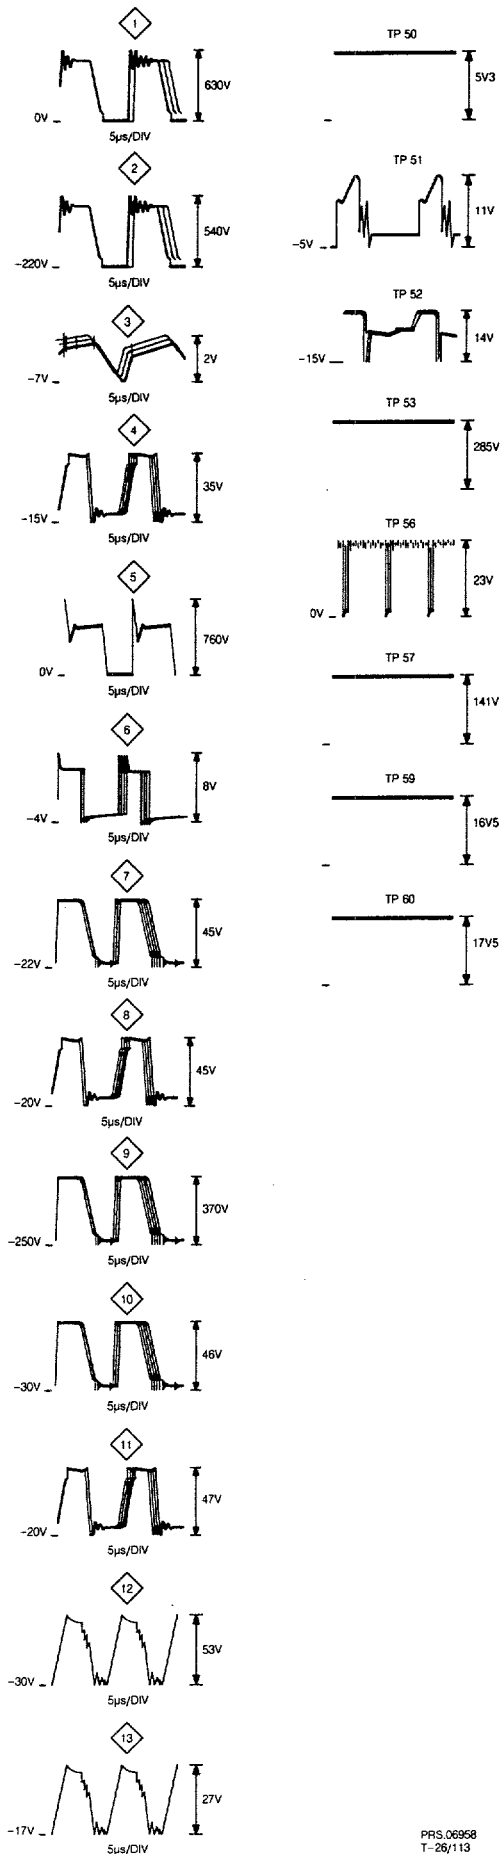

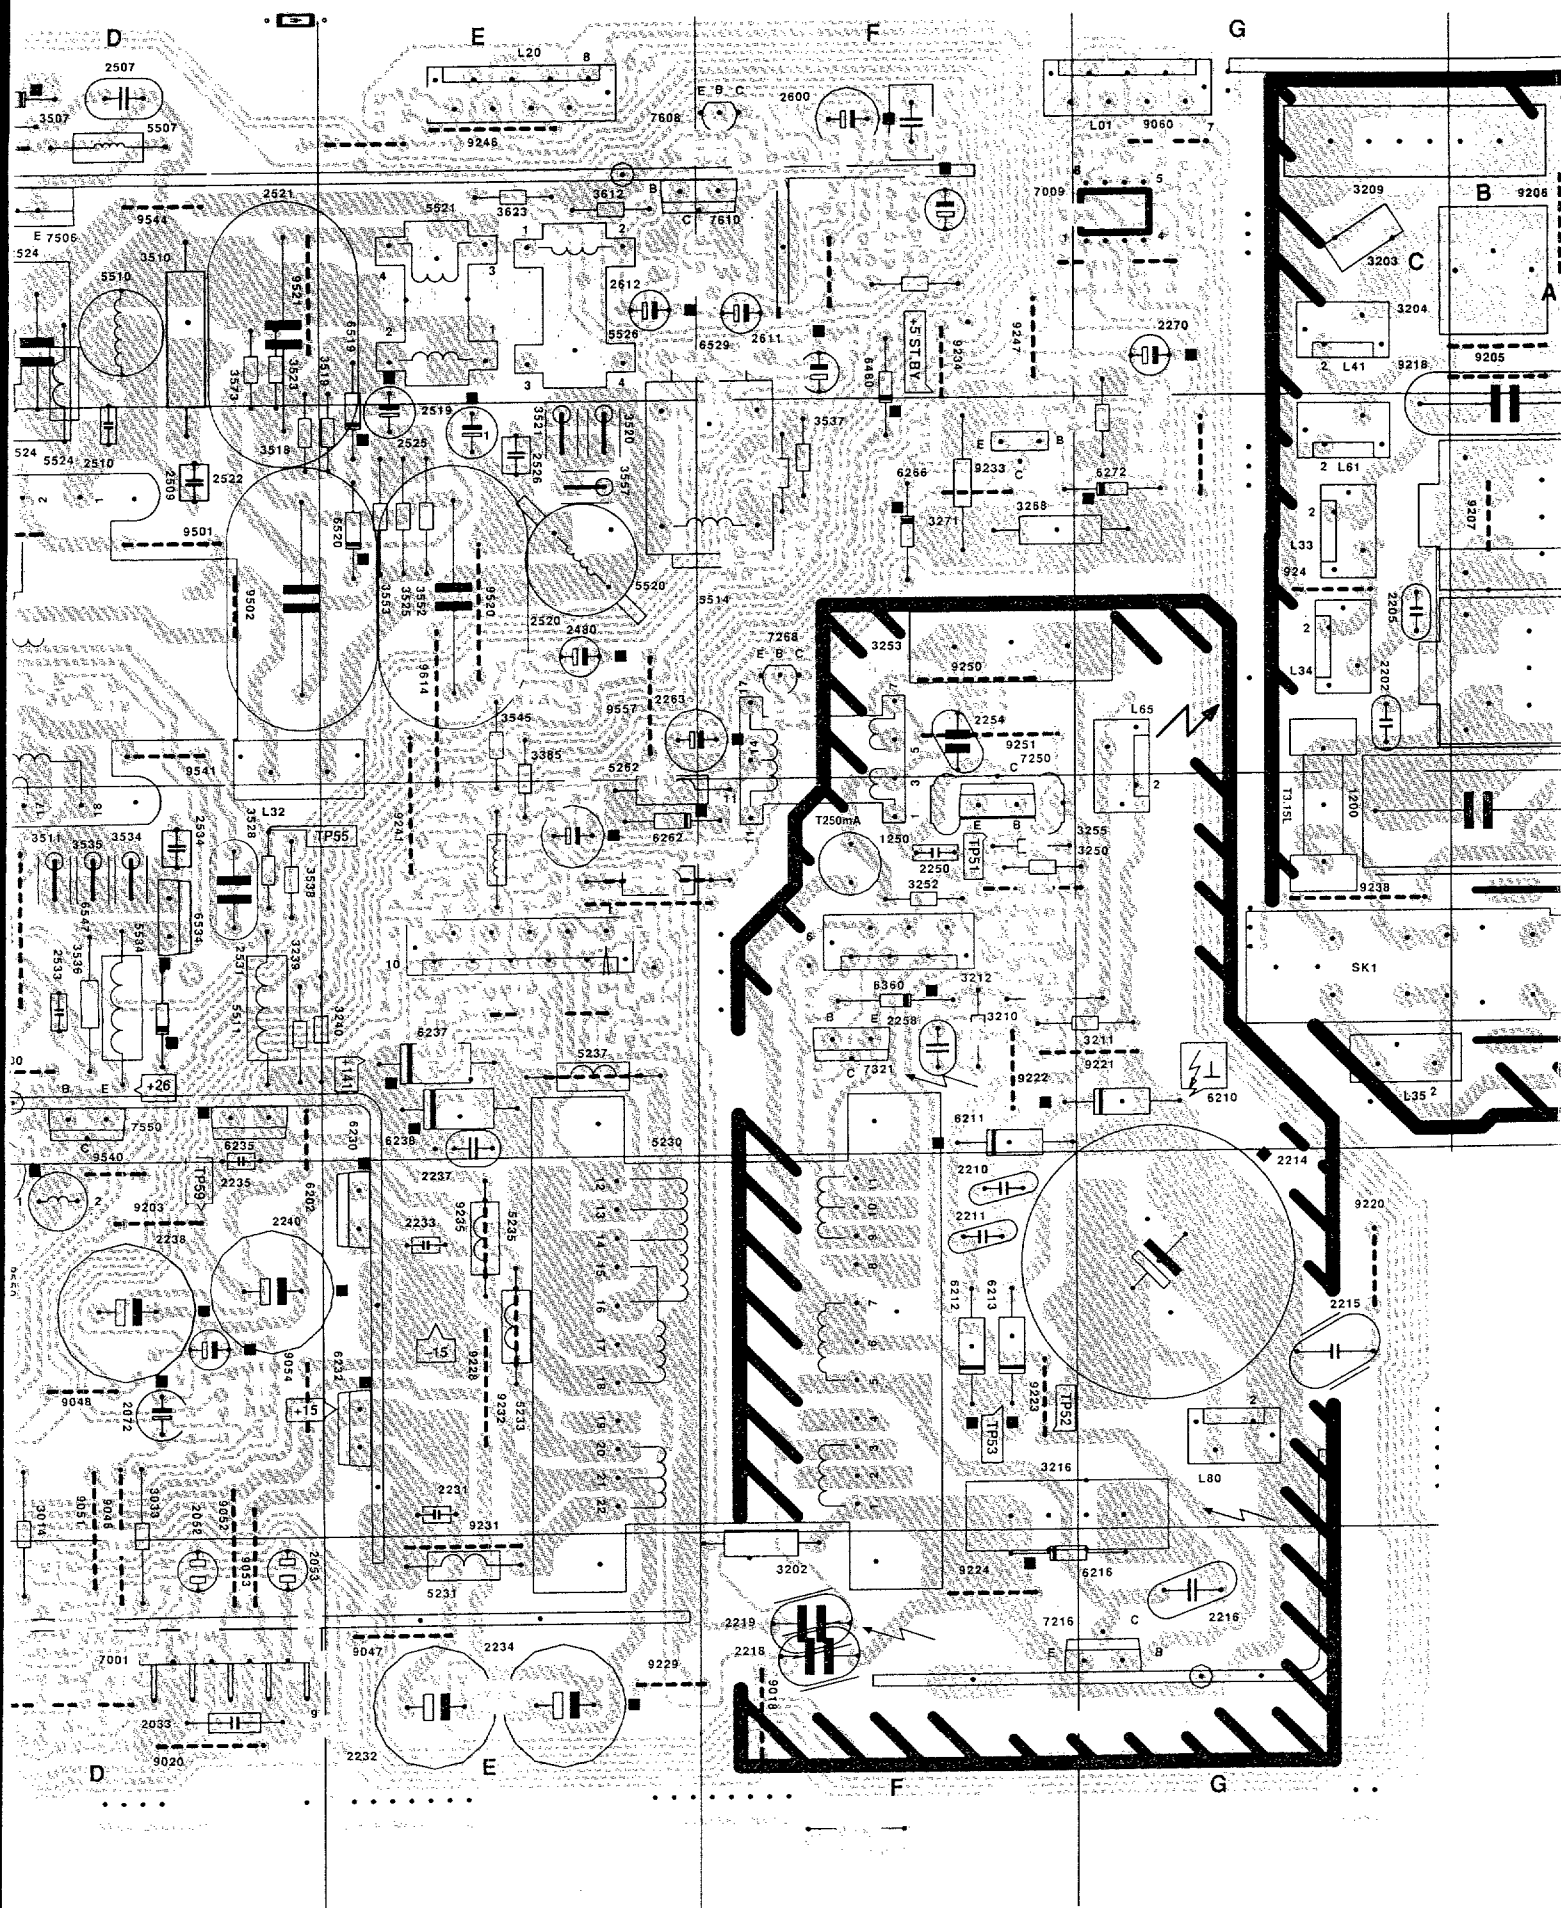


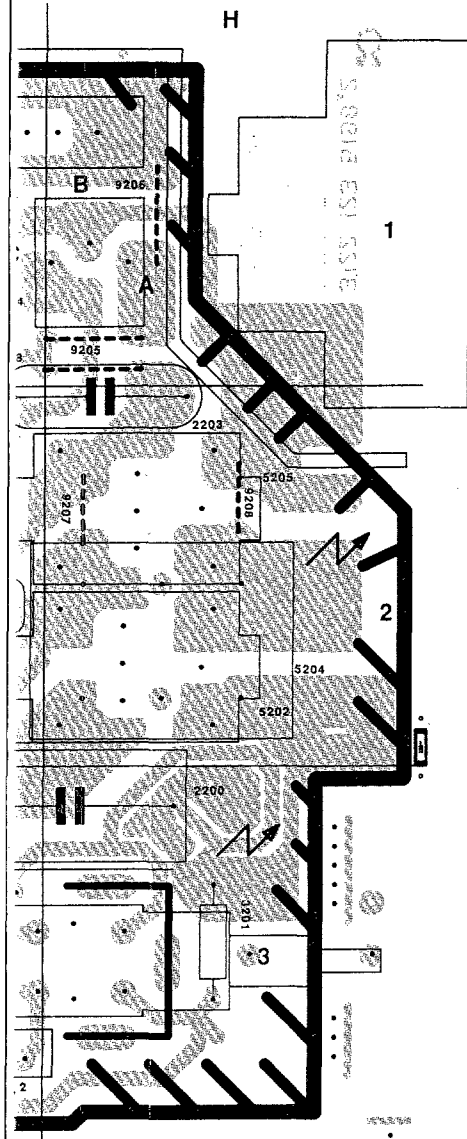


0207 A4	2417 B3	3054 A2	3470 A1	4511 F1	7009 G1	9206 H1
0211 A3	2418 A3	3060 B5	3473 B1	4512 D4	7010 A5	9207 H2
1200 G3	2419 A3	3065 C4	3479 F2	4601 F1	7011 B5	9208 H2
1240 C4	2450 A1	3066 C5	3480 B1	4602 B4	7012 D4	9216 G2
1250 F3	2451 B1	3067 A4	3481 F2	4603 B3	7013 A5	9217 G2
2001 G1	2452 B1	3068 A4	3482 F2	4604 B3	7201 F3	9218 H1
2002 G1	2455 B1	3069 A5	3484 B3	5202 H2	7216 G5	9219 E3
2003 G1	2456 A2	3072 A4	3485 E2	5204 H2	7241 B4	9220 G4
2007 B5	2457 A2	3073 A5	3500 B2	5205 H2	7242 B4	9221 G3
2008 B5	2458 B1	3074 A5	3501 C2	5210 D2	7243 B4	9222 F3
2009 G1	2459 B1	3201 H3	3502 B1	5230 F4	7246 E1	9223 F4
2011 D5	2460 B1	3202 F5	3503 B2	5231 E5	7246 E1	9224 F5
2012 C5	2461 B1	3203 G1	3504 D1	5233 E4	7250 F3	9225 E3
2013 C5	2480 E2	3204 G1	3505 C3	5235 E4	7251 F3	9228 E4
2015 A3	2501 B2	3209 G1	3506 C1	5237 E3	7268 F2	9229 E5
2016 A3	2502 B2	3210 F3	3507 D1	5241 C4	7270 F2	9230 F3
2017 A5	2503 B2	3211 G3	3508 C2	5255 F3	7272 G1	9231 E5
2018 A5	2504 C1	3212 G3	3509 C2	5260 E3	7273 F2	9232 E4
2019 A4	2507 D1	3213 F3	3510 D1	5262 E3	7380 E3	9233 F2
2020 A4	2509 D2	3214 E5	3511 D2	5381 E3	7381 E3	9234 F1
2021 A4	2510 D2	3215 E5	3512 D2	5503 B1	7384 E3	9235 E4
2022 A4	2511 C2	3216 F4	3515 C3	5505 C1	7385 E3	9238 G3
2023 A3	2512 C3	3239 D3	3514 F2	5506 C1	7400 B3	9240 B4
2024 A3	2513 C2	3240 D3	3515 C2	5507 D1	7401 B4	9241 E3
2026 B5	2517 C3	3241 B4	3516 C2	5510 D1	7402 C3	9242 G2
2027 C5	2518 C3	3242 B4	3517 C2	5511 D3	7417 B3	9243 E3
2028 B5	2519 E2	3243 B4	3518 D2	5514 F2	7444 A2	9246 E1
2029 B5	2520 E2	3244 B4	3519 E2	5520 E2	7444 A2	9247 F1
2031 C5	2521 D1	3254 B4	3520 E2	5521 E1	7450 B1	9250 F2
2032 B5	2522 D1	3246 E1	3521 E2	5524 D2	7451 A1	9251 F2
2033 D5	2523 C1	3247 B4	3523 D1	5525 D3	7469 B2	9400 D3
2035 C5	2524 D1	3248 B4	3524 D2	5526 E1	7480 F2	9451 A1
2038 D4	2525 E2	3249 F3	3525 E2	5527 C1	7481 E2	9453 B2
2040 D5	2526 E2	3250 F3	3528 D3	5534 D3	7501 B2	9454 C3
2041 D5	2527 D1	3251 F3	3529 F1	5543 D4	7506 D1	9455 B2
2042 C5	2529 F1	3252 F3	3530 F1	5555 D3	7512 C3	9456 B2
2043 C5	2530 F1	3253 F2	3531 B3	6000 A5	7530 F1	9457 A1
2044 E5	2531 D3	3255 F3	3532 C3	6001 A5	7540 C4	9458 A1
2045 D5	2533 D3	3266 F2	3533 C3	6008 A3	7541 C4	9460 B2
2046 B5	2534 D3	3267 F2	3534 D3	6010 A5	7542 C4	9461 B4
2047 B5	2535 C4	3268 F2	3535 D3	6012 D5	7543 D2	9462 C4
2050 C5	2536 C4	3270 F2	3536 D3	6014 C5	7547 D3	9463 B3
2051 C5	2537 D4	3271 F2	3537 F2	6016 B5	7550 D3	9464 C4
2052 D5	2540 F1	3272 F2	3538 D3	6020 A4	7551 D4	9468 B3
2053 D5	2541 C4	3273 G2	3539 C3	6021 D4	7552 C4	9471 B2
2056 C5	2542 C4	3274 G1	3540 C4	6201 F3	7601 F1	9472 A2
2057 C5	2543 C4	3275 G2	3541 C4	6210 G3	7602 F1	9500 D2
2058 D5	2545 C3	3298 F5	3542 C4	6211 F3	7603 F1	9501 D2
2059 E5	2546 D2	3299 F5	3543 C4	6212 F4	7608 F1	9502 D2
2060 B5	2547 C2	3306 F3	3544 C4	6213 F4	7610 E1	9508 B2
2061 B5	2551 C4	3357 E2	3545 E2	6216 F5	7618 B2	9511 C2
2065 C4	2600 F1	3376 E3	3546 C4	6230 E4	7801 B3	9520 E2
2066 D5	2601 B2	3380 E3	3550 C4	6232 E4	7802 B4	9521 D1
2070 A5	2604 B2	3381 E3	3553 E2	6235 D3	9000 A4	9529 D3
2071 A5	2605 F1	3382 E3	3556 C1	6237 E3	9001 C5	9530 B2
2072 D4	2606 C3	3383 E3	3558 C2	6238 E3	9003 A4	9533 C2
2073 D4	2607 B3	3384 E3	3561 C4	6246 B4	9004 A4	9534 C2
2074 A5	2609 F1	3385 E2	3562 D4	6251 F3	9007 A4	9535 C3
2200 H3	2610 F1	3386 E3	3573 D1	6260 E3	9008 B5	9537 C3
2202 G2	2611 F1	3387 E3	3601 C3	6262 E3	9010 C5	9538 D3
2203 H2	2612 E1	3402 A2	3602 B2	6266 F2	9012 A4	9539 D3
2205 G2	2613 F1	3403 B2	3603 B2	6272 G2	9013 A4	9540 D4
2210 F4	2614 F1	3404 A2	3604 B2	6280 C4	9015 B4	9541 D2
2211 F4	2615 F1	3405 B3	3605 C2	6321 F3	9017 C5	9542 C2
2214 G4	2626 A2	3406 B3	3606 B2	6352 E3	9028 F5	9543 C2
2215 G4	2632 B3	3407 B3	3607 B2	6353 E3	9029 D5	9544 D1
2216 G5	2633 B2	3408 B3	3608 F1	6372 E3	9021 A4	9545 C1
2217 F3	2801 B4	3409 B3	3609 F1	6373 E3	9022 A3	9547 D1
2218 F5	3000 D4	3410 B3	3610 F1	6375 E3	9023 A3	9549 E1
2219 F5	3001 D5	3411 B2	3612 E1	6376 E3	9024 A4	9552 F1
2231 E4	3002 B5	3412 B2	3613 B2	6402 B3	9025 A4	9557 E2
2232 E5	3003 B5	3413 B5	3615 F1	6403 C3	9027 A5	9614 E2
2233 E4	3004 C5	3414 B5	3616 F1	6404 C3	9028 A5	9615 B2
2234 E5	3005 D5	3415 B3	3617 F1	6417 B3	9029 B5	9602 B4
2235 D3	3006 C5	3416 B3	3618 B2	6422 B2	9030 B4	9803 B3
2236 D4	3008 C5	3417 B3	3619 F1	6441 B3	9031 C4	
2237 E3	3009 C5	3418 B3	3620 F1	6451 B1	9033 C5	L01 F1
2238 D4	3011 C5	3419 B4	3621 F1	6453 B1	9034 C5	L02 E1
2239 B4	3012 C5	3421 B3	3623 E1	6480 F1	9035 A1	L03 A1
2250 F3	3013 D4	3423 B2	3624 E1	6506 D1	9036 A4	L06 C2
2254 F2	3014 D4	3424 B2	3625 A2	6515 C3	9037 B3	L13 C4
2255 F3	3016 B5	3426 A2	3627 B4	6516 C3	9038 B3	L27 B3
2256 F3	3019 B5	3428 C3	3630 F1	6517 C3	9039 B3	L30 A1
2260 E3	3020 B5	3429 B3	3632 C3	6519 E2	9041 C4	L32 D3
2261 E3	3021 B5	3430 B3	3633 C3	6520 E2	9042 C4	L33 G2
2262 E3	3022 B5	3437 B1	3634 B3	6527 C1	9043 D5	L34 G2
2263 E2	3023 C5	3438 B3	3635 B3	6529 F1	9044 A5	L35 G3
2270 G1	3024 C5	3439 B3	3636 B3	6534 D3	9045 D4	L36 A2
2272 G2	3026 D5	3440 B2	3637 B3	6536 C3	9046 D4	L37 A3
2330 B4	3027 A5	3442 B3	3639 B4	6537 C3	9047 E5	L38 A2
2380 E3	3028 A5	3443 A2	4000 A5	6542 C3		

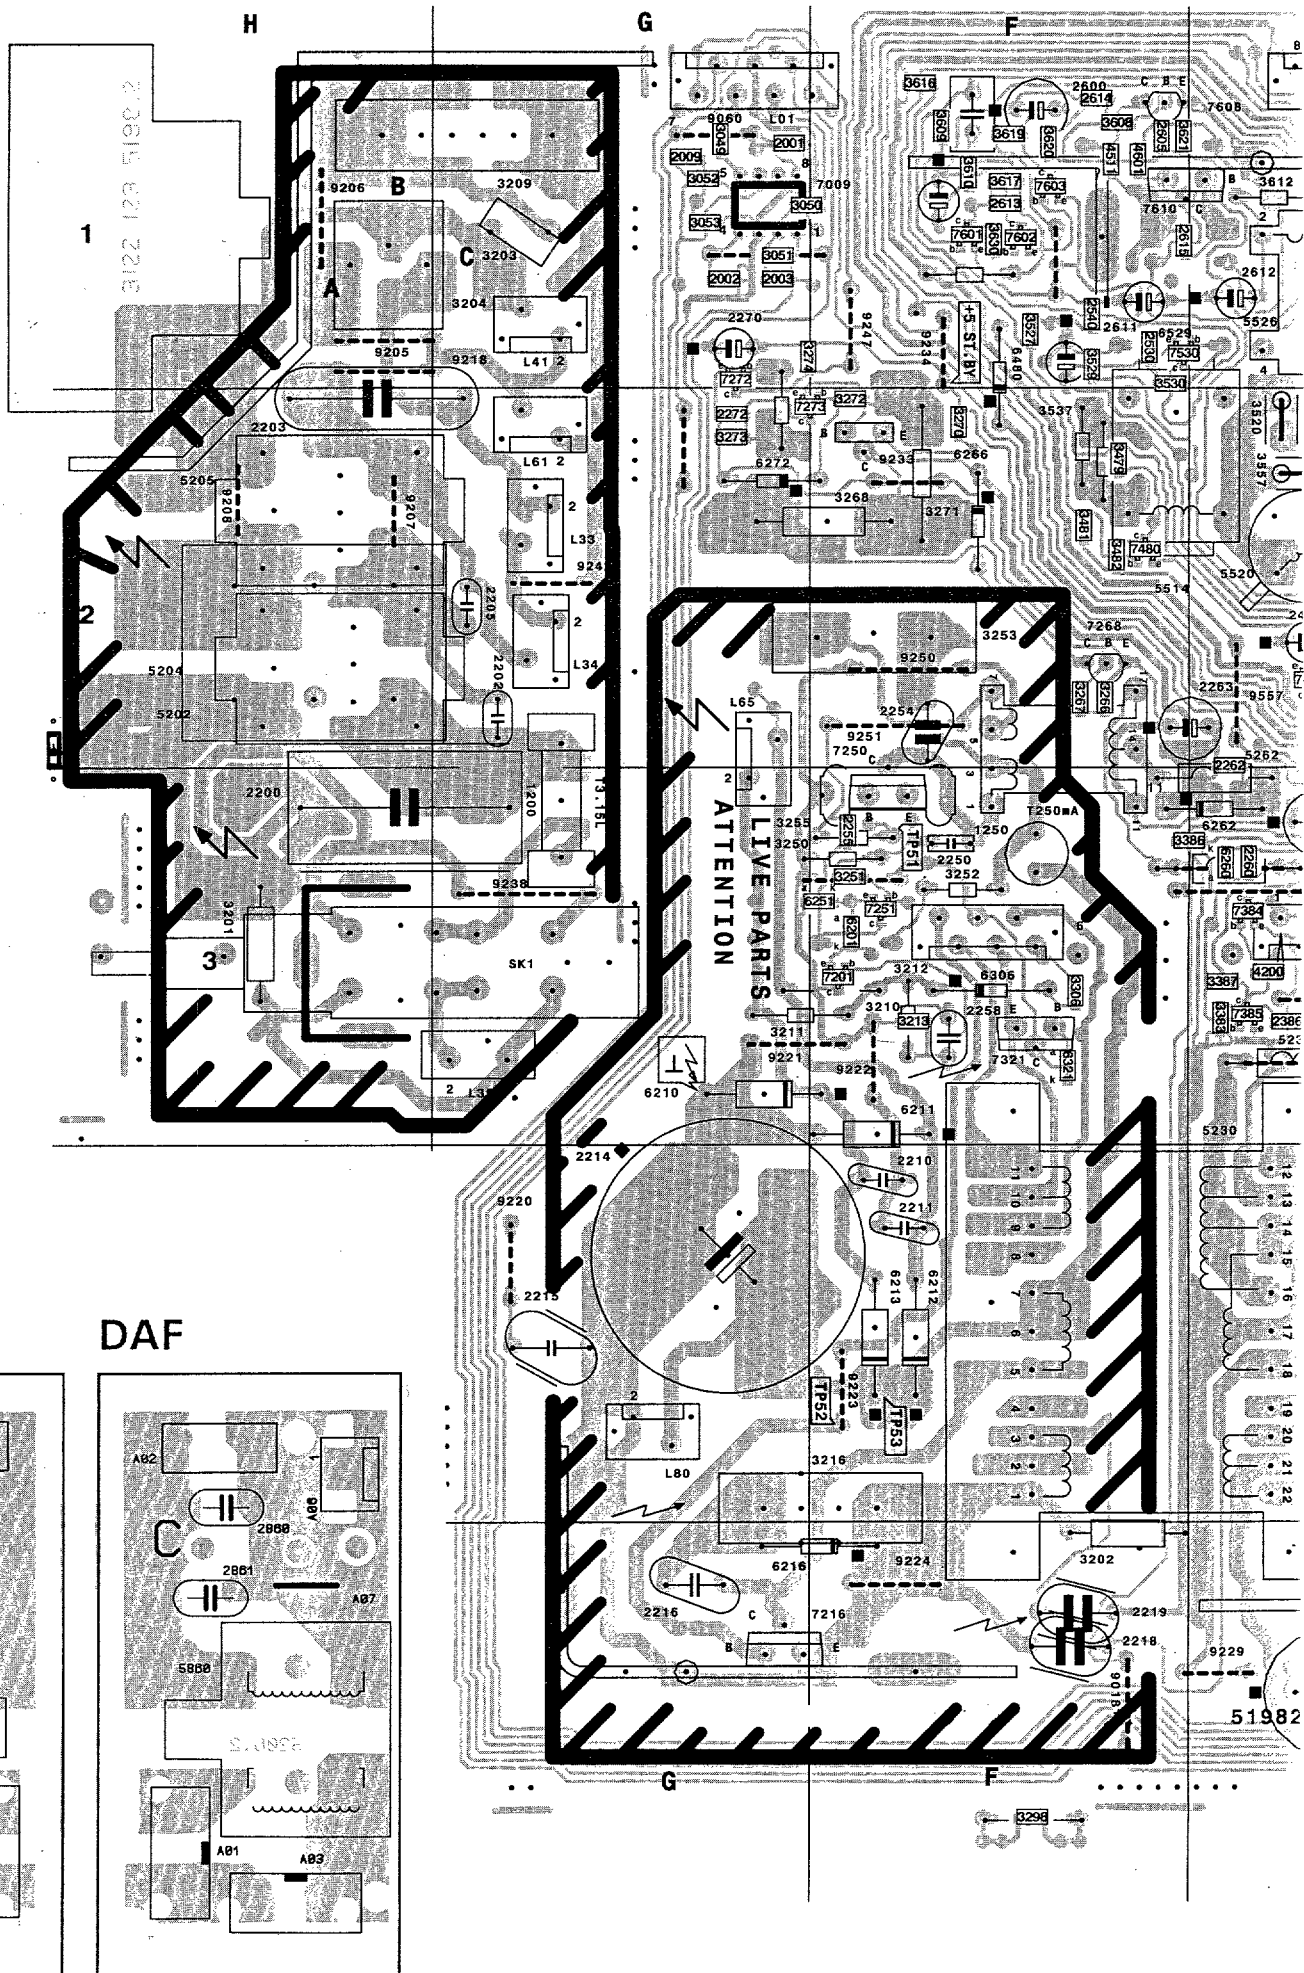



DAF

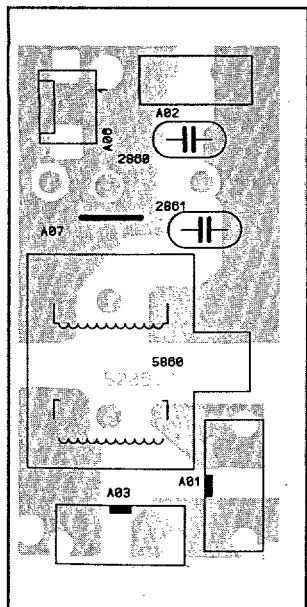


DAF

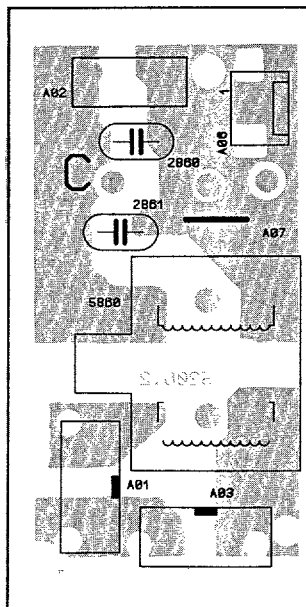

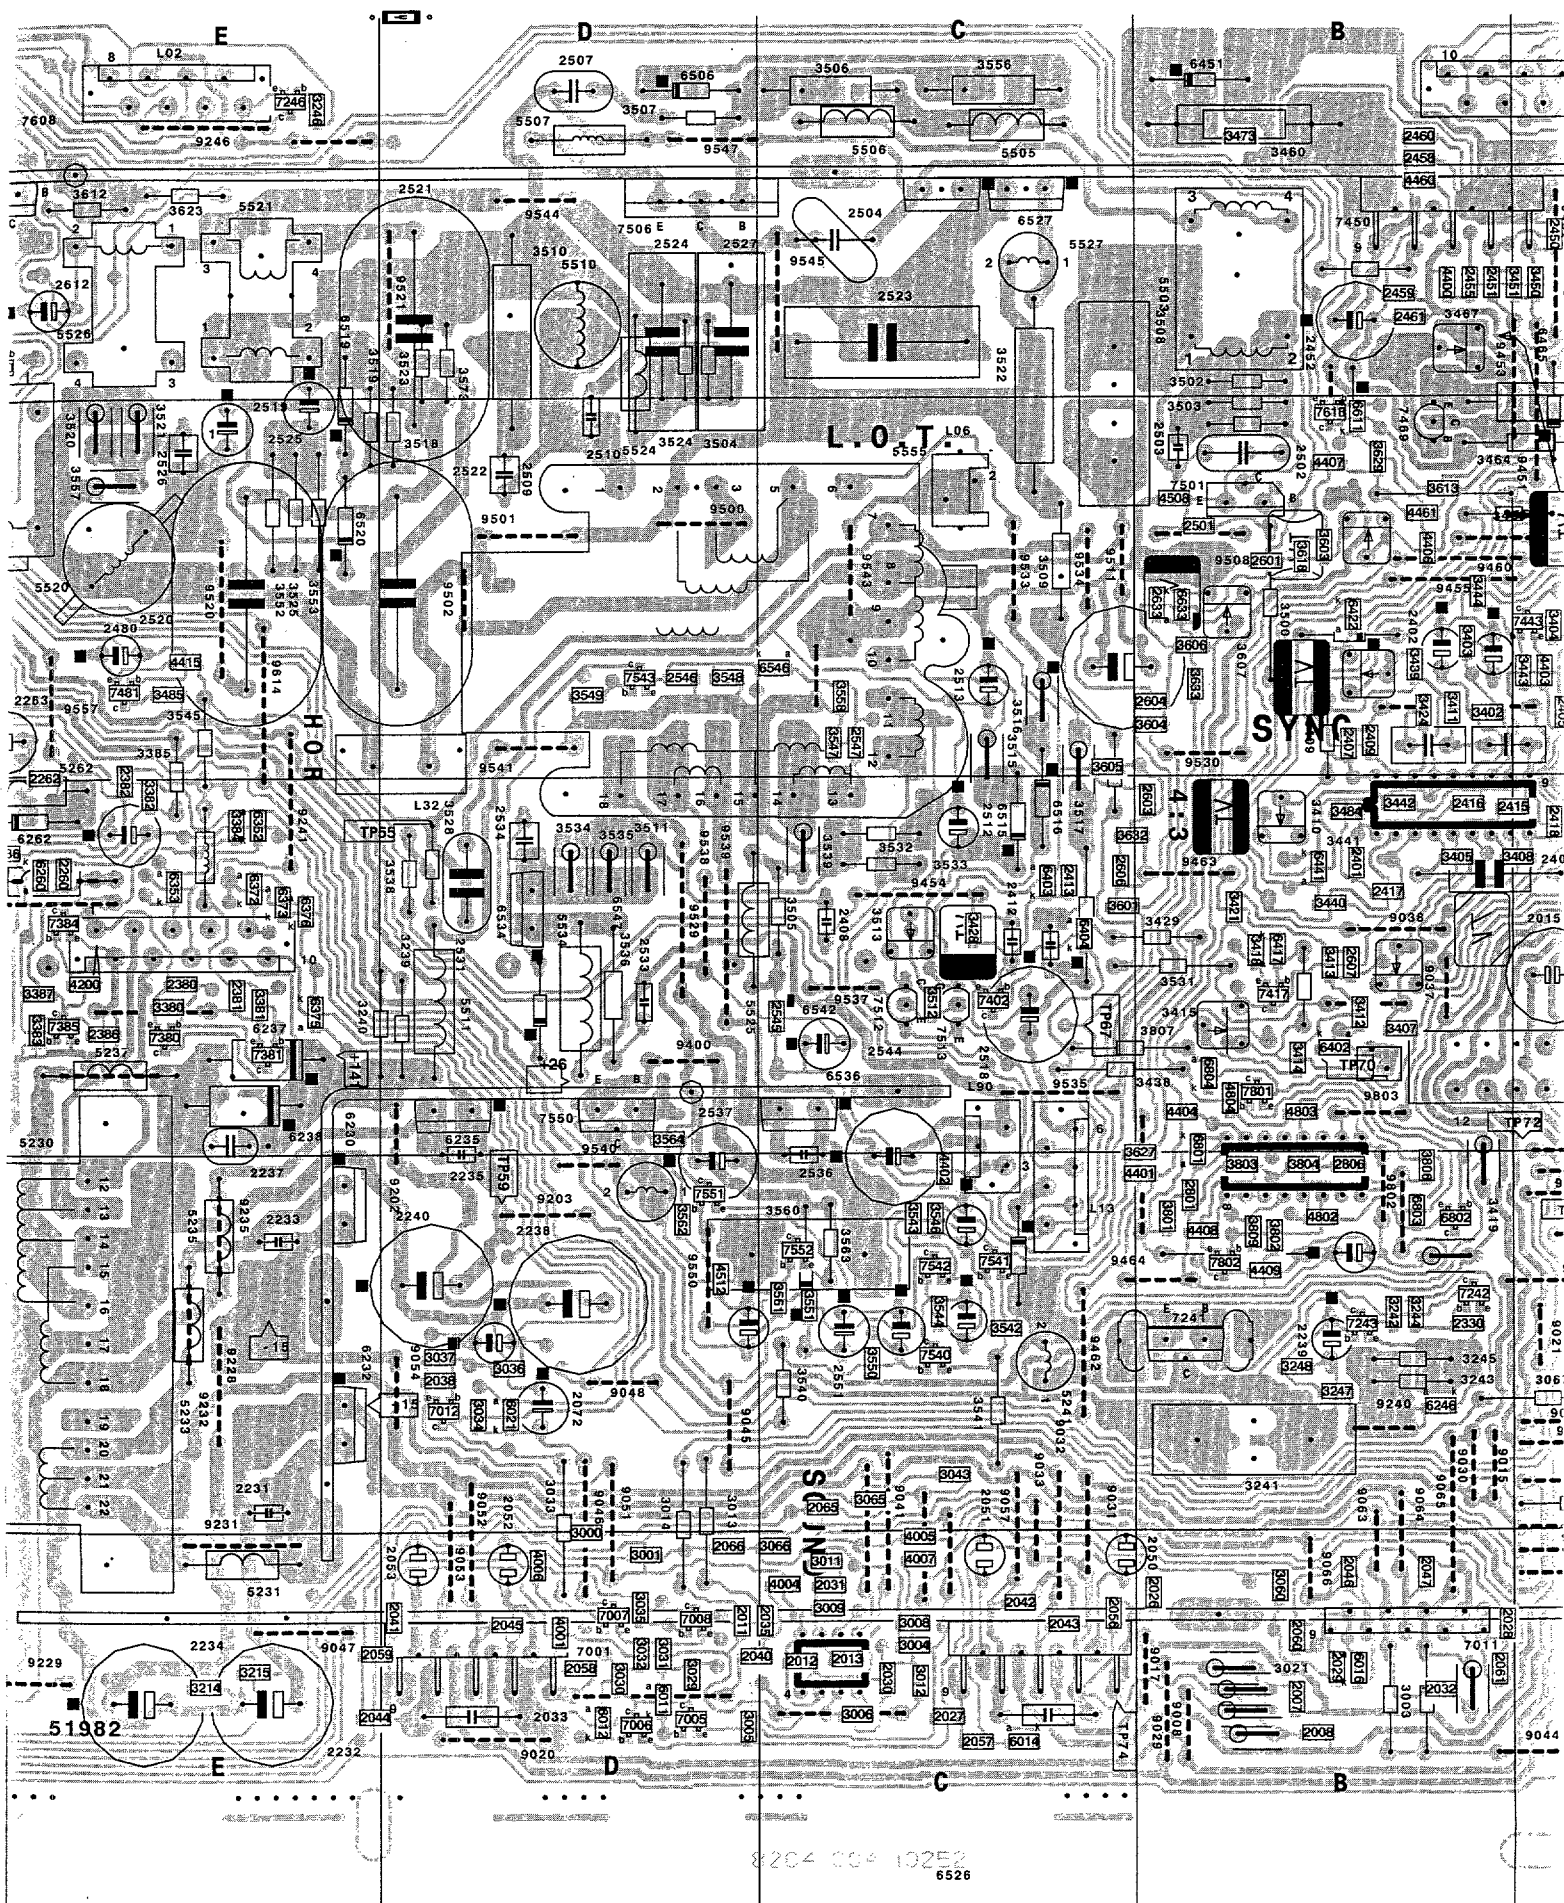


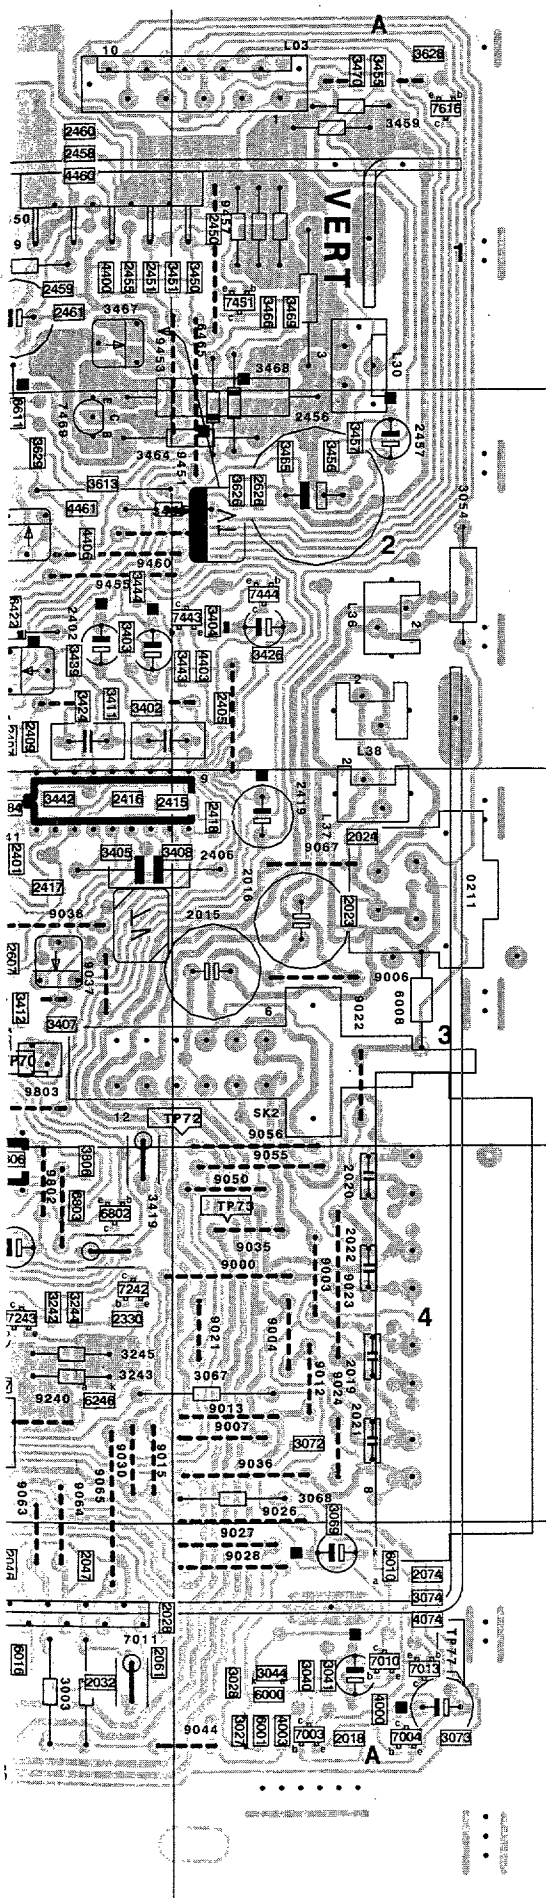


0207 A4	2417 B3	3054 A2	3470 A1	4511 F1	7009 G1	9206 H1
0211 A3	2418 A3	3060 B5	3473 B1	4512 D4	7010 A5	9207 H2
1200 G3	2419 A3	3065 C4	3479 F2	4601 F1	7011 B5	9208 H2
1240 C4	2450 A1	3066 C5	3480 B1	4802 B4	7012 D4	9216 G2
1250 F3	2451 B1	3067 A4	3481 F2	4803 B3	7013 A5	9217 G2
2001 G1	2452 B1	3068 A4	3482 F2	4804 B3	7201 F3	9218 H1
2002 G1	2455 B1	3069 A5	3484 B3	5202 H2	7216 G5	9219 G3
2003 G1	2456 A2	3072 A4	3485 E2	5204 H2	7241 B4	9220 G4
2007 B5	2457 A2	3073 A5	3500 B2	5205 H2	7242 B4	9221 G3
2008 B5	2458 B1	3074 A5	3501 C2	5210 D2	7243 B4	9222 F3
2009 G1	2459 B1	3201 H3	3502 B1	5230 F4	7246 E1	9223 F4
2011 D5	2460 B1	3202 F5	3503 B2	5231 E5	7246 E1	9224 F5
2012 C5	2461 B1	3203 G1	3504 D1	5233 E4	7250 F3	9225 E3
2013 C5	2480 E2	3204 G1	3505 C3	5235 E4	7251 F3	9226 E4
2015 A3	2501 B2	3209 G1	3506 C1	5237 E3	7268 F2	9229 E5
2016 A3	2502 B2	3210 F3	3507 D1	5241 C4	7270 F2	9230 F3
2017 A5	2503 B2	3211 G3	3508 C2	5255 F3	7272 G1	9231 E5
2018 A5	2504 C1	3212 G3	3509 C2	5260 E3	7273 F2	9232 E4
2019 A4	2507 D1	3213 F3	3510 D1	5262 E3	7380 E3	9233 F2
2020 A4	2509 D2	3214 E5	3511 D2	5263 E3	7381 E3	9234 F1
2021 A4	2510 D2	3215 E5	3512 D2	5303 B1	7384 E3	9235 E4
2022 A4	2511 C2	3216 F4	3515 C3	5505 C1	7385 E3	9238 G3
2023 A3	2512 C3	3239 D3	3514 F2	5506 C1	7400 B3	9240 B4
2024 A3	2513 C2	3240 D3	3515 C2	5507 D1	7401 B4	9241 E3
2026 B5	2517 C3	3241 B4	3516 C2	5510 D1	7402 C3	9242 G2
2027 C5	2518 C3	3242 B4	3517 C2	5511 D3	7417 B3	9243 E3
2028 B5	2519 E2	3243 B4	3518 D2	5514 F2	7443 A2	9246 E1
2029 B5	2520 E2	3244 B4	3519 E2	5520 E2	7444 A2	9247 F1
2031 C5	2521 D1	3254 B4	3520 E2	5521 E1	7450 B1	9250 F2
2032 B5	2522 D1	3246 E1	3521 E2	5524 D2	7451 A1	9251 F2
2033 D5	2523 C1	3247 B4	3523 D1	5525 D3	7459 B2	9400 D3
2035 C5	2524 D1	3248 B4	3524 D2	5526 E1	7480 F2	9451 A1
2038 D4	2525 E2	3249 F3	3525 E2	5527 C1	7481 E2	9453 B2
2040 D5	2526 E2	3250 F3	3528 D3	5534 D3	7501 B2	9454 C3
2041 D5	2527 D1	3251 F3	3529 F1	5543 D4	7506 D1	9455 B2
2042 C5	2529 F1	3252 F3	3530 F1	5555 D3	7512 C3	9456 B2
2043 C5	2530 F1	3253 F2	3531 B3	6000 A5	7530 F1	9457 A1
2044 E5	2531 D3	3255 F3	3532 C3	6001 A5	7540 C4	9458 A1
2045 D5	2533 D3	3266 F2	3533 C3	6008 A3	7541 C4	9460 B2
2046 B5	2534 D3	3267 F2	3534 D3	6010 A5	7542 C4	9461 B4
2047 B5	2535 C4	3268 F2	3535 D3	6012 D5	7543 D2	9462 C4
2050 C5	2536 C4	3270 F2	3536 D3	6014 C5	7547 D3	9463 B3
2051 C5	2537 D4	3271 F2	3537 F2	6016 B5	7550 D3	9464 C4
2052 D5	2540 F1	3272 F2	3538 D3	6020 A4	7551 D4	9468 B3
2053 D5	2541 C4	3273 G2	3539 C3	6021 D4	7552 C4	9471 B2
2056 C5	2542 C4	3274 G1	3540 C4	6201 F3	7601 F1	9472 A2
2057 C5	2543 C4	3275 G2	3541 C4	6210 G3	7602 F1	9500 D2
2058 D5	2545 C3	3298 F5	3542 C4	6211 F3	7603 F1	9501 D2
2059 E5	2546 D2	3299 F5	3543 C4	6212 F4	7608 F1	9502 D2
2060 B5	2547 C2	3306 F3	3544 C4	6213 F4	7610 E1	9508 B2
2061 B5	2551 C4	3357 E2	3545 E2	6216 F5	7618 B2	9511 C2
2065 C4	2600 F1	3376 E3	3546 C4	6230 E4	7801 B3	9520 E2
2066 D5	2601 B2	3380 E3	3550 C4	6232 E4	7802 B4	9521 D1
2070 A5	2604 B2	3381 E3	3553 E2	6235 D3	9000 A4	9529 D3
2071 A5	2605 F1	3382 E3	3556 C1	6237 E3	9001 C5	9530 B2
2072 D4	2606 C3	3383 E3	3558 C2	6238 E3	9003 A4	9533 C2
2073 D4	2607 B3	3384 E3	3561 C4	6246 B4	9004 A4	9534 C2
2074 A5	2609 F1	3385 E2	3562 D4	6251 F3	9007 A4	9535 C3
2200 H3	2610 F1	3386 E3	3573 D1	6260 E3	9008 B5	9537 C3
2202 G2	2611 F1	3387 E3	3601 C3	6262 E3	9010 C5	9538 D3
2203 H2	2612 E1	3402 A2	3602 B2	6266 F2	9012 A4	9539 D3
2205 G2	2613 F1	3403 B2	3603 B2	6272 G2	9013 A4	9540 D4
2210 F4	2614 F1	3404 A2	3604 B2	6280 C4	9015 B4	9541 D2
2211 F4	2615 F1	3405 B3	3605 C2	6321 F3	9017 C5	9542 C2
2214 G4	2626 A2	3406 B3	3606 B2	6352 E3	9028 F5	9543 C2
2215 G4	2632 B3	3407 B3	3607 B2	6353 E3	9020 D5	9544 D1
2216 G5	2633 B2	3408 B3	3608 F1	6372 E3	9021 A4	9545 C1
2217 F3	2801 B4	3409 B3	3609 F1	6373 E3	9022 A3	9547 D1
2218 F5	3000 D4	3410 B3	3610 F1	6375 E3	9023 A4	9549 E1
2219 F5	3001 D5	3411 B2	3612 E1	6376 E3	9024 A4	9552 F1
2231 E4	3002 B5	3412 B2	3613 B2	6402 B3	9026 A4	9557 E2
2232 E5	3003 B5	3413 B3	3615 F1	6403 C3	9027 A5	9614 E2
2233 E4	3004 C5	3414 B3	3616 F1	6404 C3	9028 A5	9615 B2
2234 E5	3005 D5	3415 B3	3617 F1	6417 B3	9029 B5	9628 B4
2235 D3	3006 C5	3416 B3	3618 B2	6422 B2	9030 B4	9603 B3
2236 D4	3008 C5	3417 B3	3619 F1	6441 B3	9031 C4	
2237 E3	3009 C5	3418 B3	3620 F1	6451 B1	9033 C5	L01 F1
2238 D4	3011 C5	3419 B4	3621 F1	6453 B1	9034 C5	L02 E1
2239 B4	3012 C5	3421 B3	3623 E1	6480 F1	9035 A1	L03 A1
2250 F3	3013 D4	3423 B2	3624 E1	6506 D1	9036 A1	L06 C2
2254 F2	3014 D4	3424 B2	3626 A2	6515 C3	9037 B3	L13 C4
2255 F3	3016 B5	3426 A2	3627 B4	6516 C3	9038 B3	L27 B3
2258 F3	3019 B5	3428 C3	3630 F1	6517 C3	9039 B3	L30 A1
2260 E3	3020 B5	3429 B3	3632 C3	6519 E2	9041 C4	L32 D3
2261 E3	3021 B5	3430 B3	3633 E1	6520 E2	9042 C4	L33 G2
2262 E3	3022 B5	3437 B1	3634 B3	6527 C1	9043 D5	L34 G2
2263 E2	3023 C5	3438 B3	3635 F1	6529 F1	9044 A5	L35 G3
2270 G1	3024 C5	3439 B2	3636 B4	6534 D3	9045 D4	L36 A2
2272 G2	3026 D5	3440 B3	3637 B3	6536 C3	9046 D4	L37 A3
2330 B4	3027 A5	3442 B3	3639 B4	6537 C3	9047 E5	L38 A2
2380 E3	3028 A5	3443 A2	4000 A5	6542 C3	9048 D4	L39 F3
2381 E3	3029 D5	3444 B2	4001 D5	6546 C2	9050 A4	L40 E3
2382 E3	3030 D5	3450 A1	4003 A5	6547 D3	9051 D4	L41 G1
2386 E3	3031 D5	3451 A1	4004 C5	6551 D4	9052 D4	L61 G2
2401 B3	3032 D5	3455 A1	4005 C5	6601 E1	9053 D5	L65 G2
2402 B2	3033 D4	3456 A2	4006 D5	6611 B2	9054 D4	L66 D1
2403 A2	3034 D4	3457 A2	4007 C5	6801 B4	9055 A4	L70 A2
2404 A2	3035 C5	3458 A1	4074 A5	6802 B4	9056 A4	L80 G4
2405 A2	3036 D4	3459 A1	4200 E3	6803 B4	9057 C4	L90 C3
2406 B3	3037 D4	3460 B1	4402 C4	6804 B4	9058 G2	SK1 G3
2407 B2	3040 A5	3461 A1	4403 A2	7000 C5	9059 G1	SK2 A3
2408 C3	3041 A5	3462 A1	4406 B2	7001 D5	9060 G1	
2409 B2	3043 C4	3463 A1	4407 B1	7002 C5	9063 B5	
2410 B2	3044 A5	3464 A2	4408 B4	7003 A5	9064 B5	
2411 B2	3049 G1	3465 A2	4409 B4	7004 A5	9065 B4	
2412 C3	3050 G1	3466 A1	4415 E2	7005 D5	9066 B5	
2413 C3	3051 G1	3467 B2	4460 B1	7006 D5	9067 A3	
2415 A3	3052 G1	3468 A2	4461 B2	7007 D5	9203 D4	
2416 B3	3053 G1	3469 A1	4508 B2	7008 D5	9205 H1	

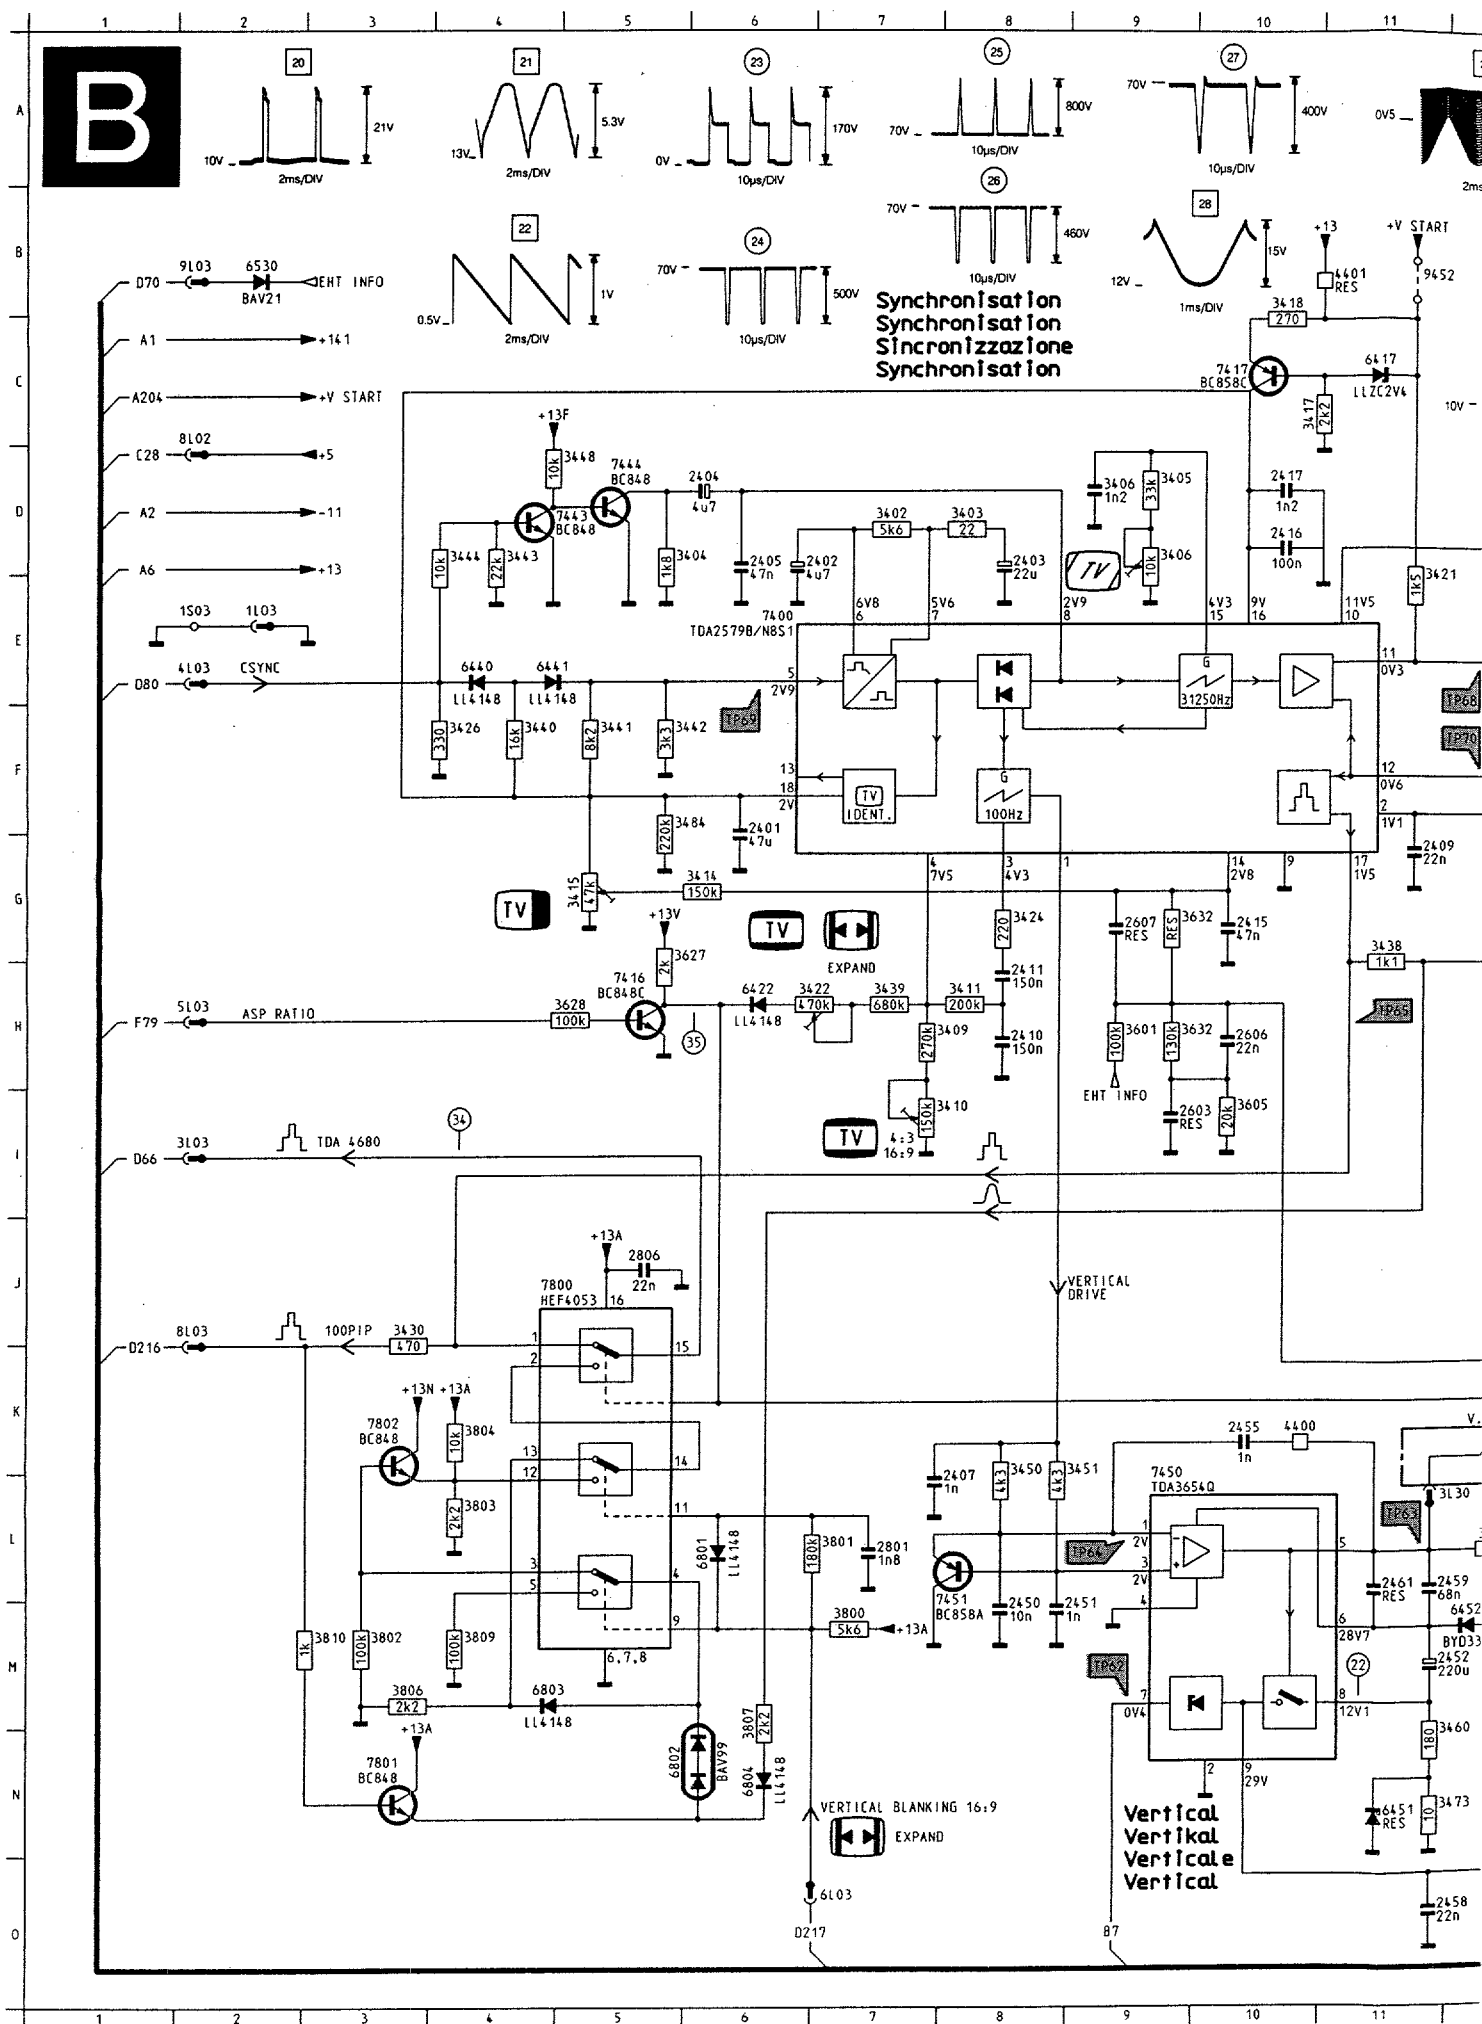



Synchronisation

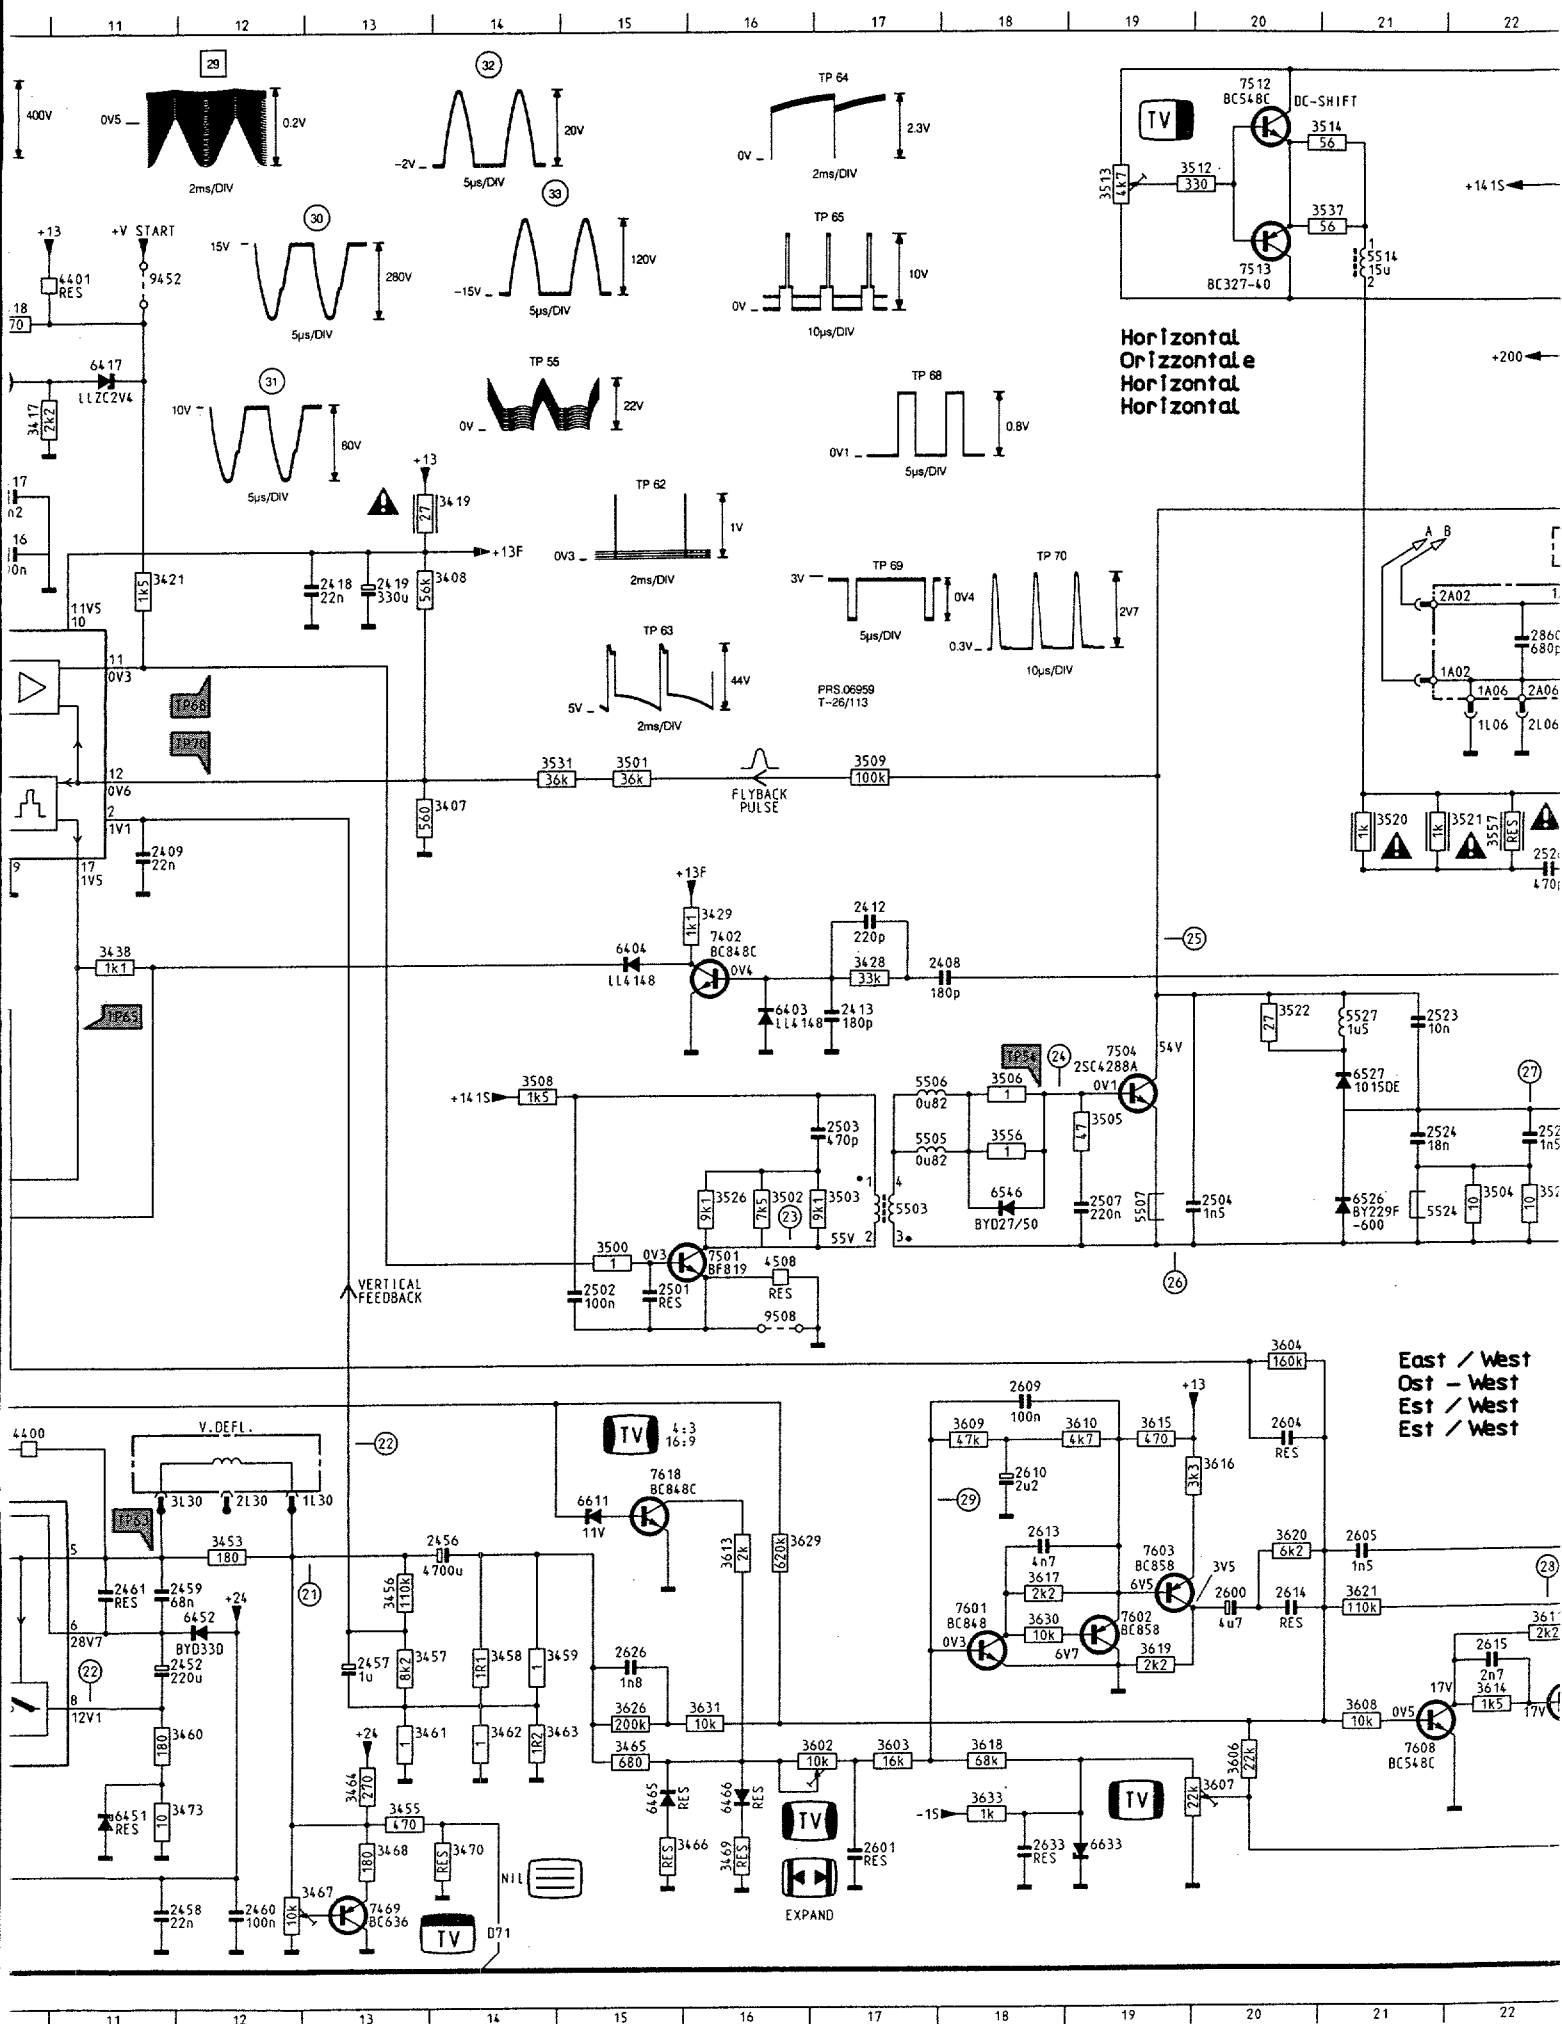




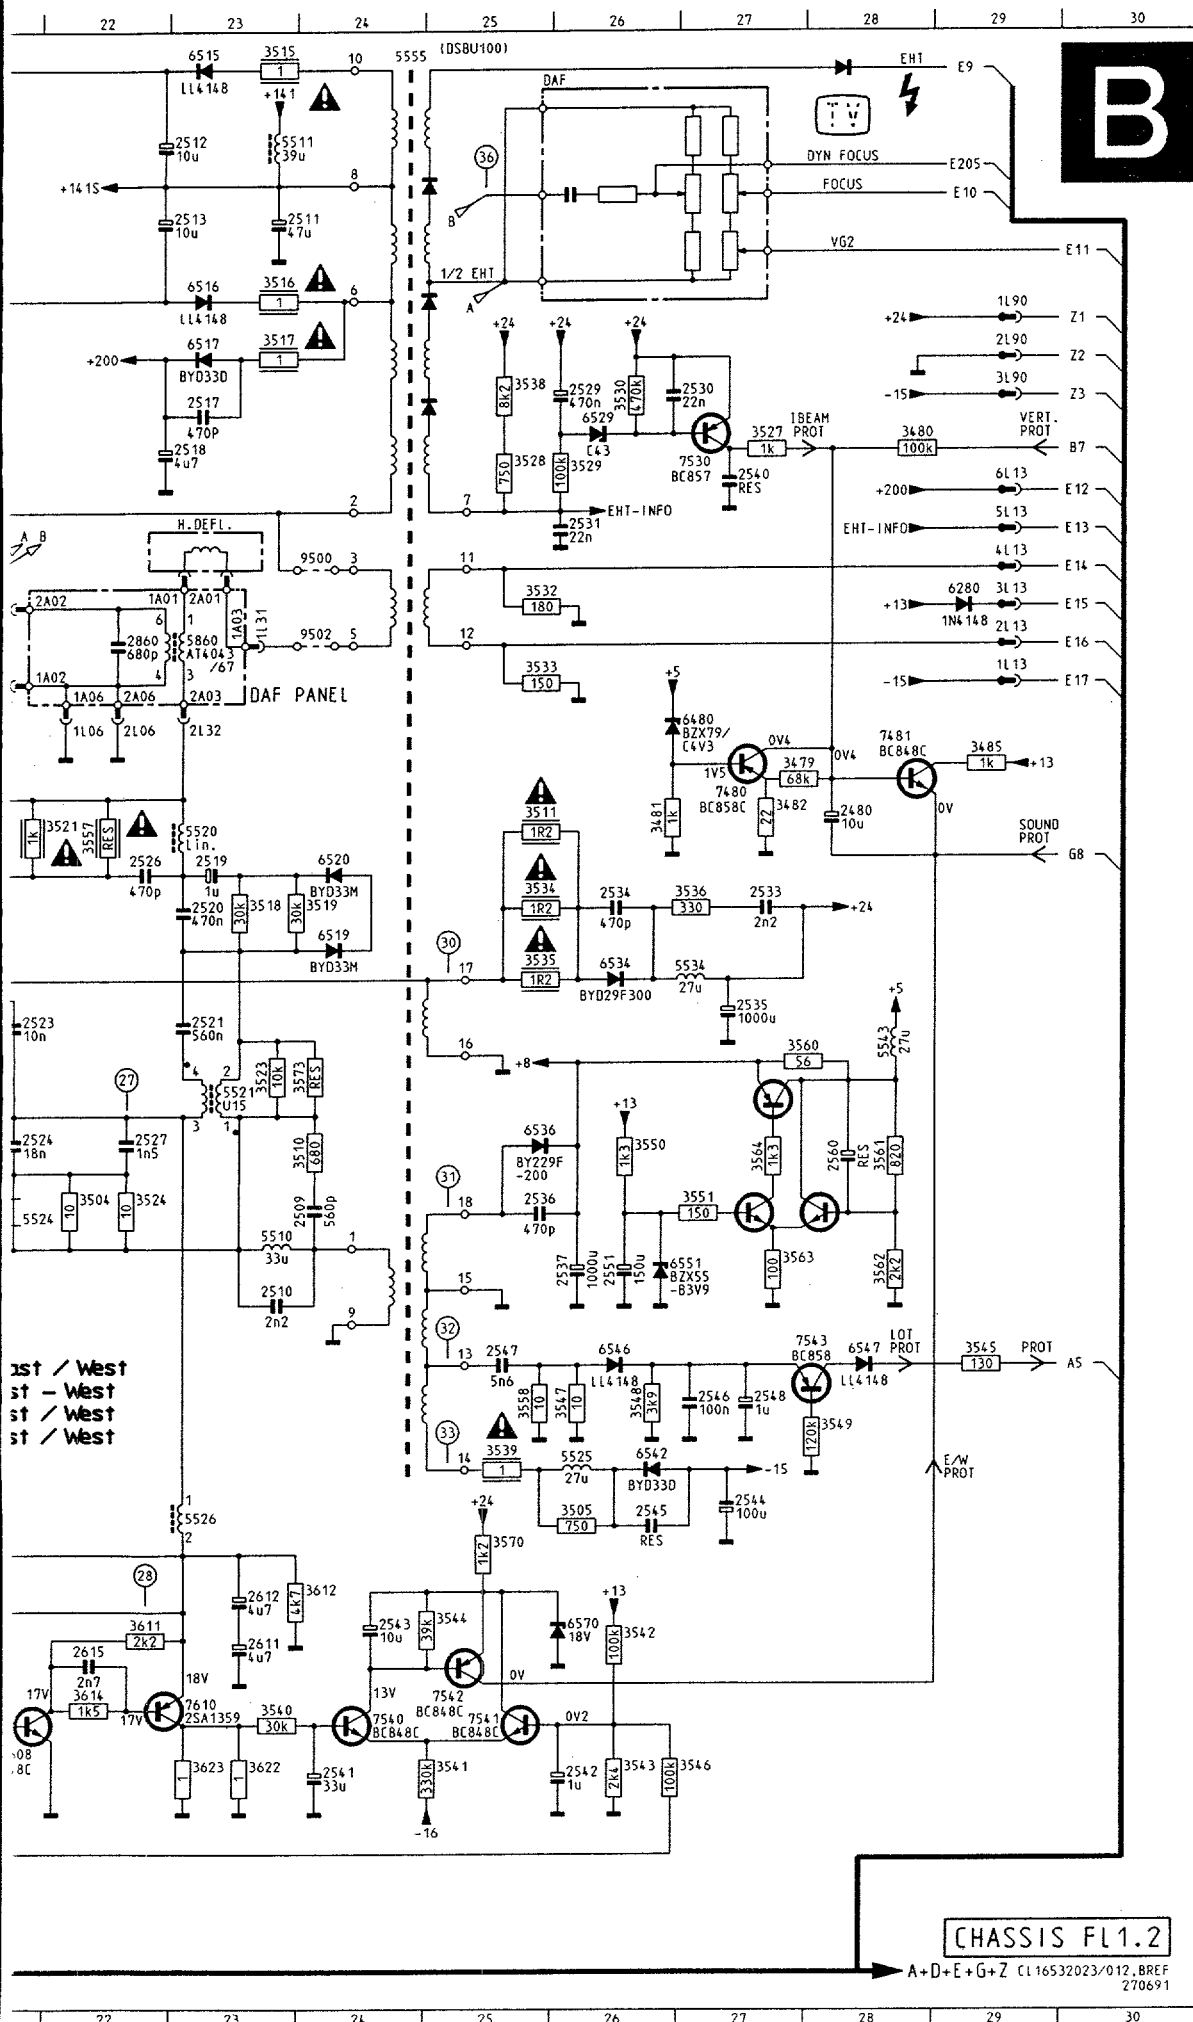


2401	G 6	3450	K 8	3632	H 9
2402	D 6	3451	K 9	3633	G 9
2403	D 8	3453	L12	3633	N18
2404	D 6	3455	N13	3800	M 7
2405	D 6	3456	L13	3801	L 7
2407	L 8	3457	M13	3802	M 3
2408	H18	3458	M14	3803	L 4
2409	G11	3459	M14	3804	K 4
2410	H 8	3460	M11	3806	M 3
2411	H 8	3461	M13	3807	M 6
2412	G17	3462	M14	3809	M 4
2413	H17	3463	M14	3810	M 3
2415	G10	3464	N13	4400	K10
2416	D10	3465	N15	4401	B11
2417	D10	3466	N15	4508	J16
2418	E13	3467	O12	5503	I17
2419	E13	3468	N13	5505	I17
2450	M 8	3469	O16	5506	I17
2451	M 8	3470	N14	5507	I19
2452	M11	3473	N11	5510	J23
2455	K10	3479	F27	5511	A23
2456	L14	3480	C28	5514	B21
2457	M13	3481	F26	5520	G23
2458	O11	3482	F27	5521	I23
2459	L11	3484	F 5	5524	K21
2460	O12	3485	F29	5525	I26
2461	L11	3500	J15	5526	I23
2480	F28	3501	F15	5527	H21
2501	J15	3502	I16	5534	H27
2502	J15	3503	I17	5543	H28
2503	I17	3504	I22	5555	A24
2504	I20	3505	I19	5860	E23
2507	I19	3505	L26	6280	E29
2509	I24	3506	H18	6403	H16
2510	J23	3508	H14	6404	G15
2511	B23	3509	F17	6417	C11
2512	A23	3510	I24	6422	H 6
2513	B23	3511	F25	6440	E 4
2517	C23	3512	A20	6441	E 4
2518	D23	3513	B19	6451	N11
2519	G23	3514	A21	6452	M12
2520	G23	3515	A23	6465	N15
2521	H23	3516	B23	6466	N16
2523	H21	3517	C23	6480	F27
2524	I21	3518	G23	6515	A23
2526	G22	3519	G24	6516	B23
2527	I22	3520	F21	6517	C23
2529	C26	3521	F22	6519	G24
2530	C27	3522	H20	6520	G24
2531	D26	3523	H23	6526	I21
2533	G27	3524	I22	6527	H21
2534	G26	3526	I16	6529	C26
2535	H27	3527	C27	6530	B 2
2536	I25	3528	D25	6534	H26
2537	J26	3529	D26	6536	I25
2540	D27	3530	C26	6542	K26
2541	N24	3531	F14	6546	I18
2542	N26	3532	E25	6546	K26
2543	H24	3533	E25	6547	K28
2544	L27	3534	G25	6551	J26
2545	L26	3535	H25	6570	M26
2546	K27	3536	G27	6611	L15
2547	K25	3537	B21	6633	N19
2548	K27	3538	C25	6801	L 6
2551	J26	3539	K25	6802	N 5
2560	I28	3540	M23	6803	M 4
2600	M20	3541	N25	6804	N 6
2601	N17	3542	M26	7400	E 6
2603	I 9	3543	N26	7402	G16
2604	K20	3544	M25	7416	H 5
2605	L21	3545	K29	7417	C10
2606	H10	3546	N27	7443	D 4
2607	G 9	3547	K26	7444	D 5
2609	K18	3548	K26	7450	L 9
2610	L18	3549	K28	7451	L 8
2611	M23	3550	I26	7469	O13
2612	M23	3551	I27	7480	F27
2613	L18	3556	I18	7481	F28
2614	M20	3557	G22	7501	J16
2615	M22	3558	K25	7504	H19
2626	M15	3560	H27	7512	A20
2633	N18	3561	I28	7513	B20
2801	L 7	3562	J28	7530	D27
2806	J 5	3563	J27	7540	M24
2860	E22	3564	I27	7541	M25
3402	D 7	3570	L25	7542	M25
3403	D 8	3573	H24	7543	K28
3404	D 5	3601	H 9	7601	M18
3405	D 9	3602	N17	7602	M19
3406	D 9	3603	N17	7603	L19
3406	D 9	3604	K20	7608	N21
3407	F14	3605	I10	7610	M23
3408	D14	3606	N20	7618	L15
3409	H 7	3607	N20	7800	J 4
3410	I 7	3608	M21	7801	N 3
3411	H 8	3609	K18	7802	K 3
3414	G 6	3610	K19	9452	B11
3415	G 5	3611	M22	9500	D24
3417	C10	3612	L24	9502	E24
3418	B10	3613	L16	9508	J16
3419	D14	3614	M22		
3421	D11	3615	K19		
3422	H 7	3616	K20		
3424	G 8	3617	L18		
3426	F 4	3618	N18		
3428	H17	3619	M19		
3429	G16	3620	L20		
3430	J 3	3621	M21		
3438	G11	3622	N23		
3439	H 7	3623	N23		
3440	F 4	3626	M15		
3441	F 5	3627	G 5		
3442	F 5	3628	H 5		
3443	D 4	3629	L16		
3444	D 4	3630	M18		
3448	D 5	3631	M16		

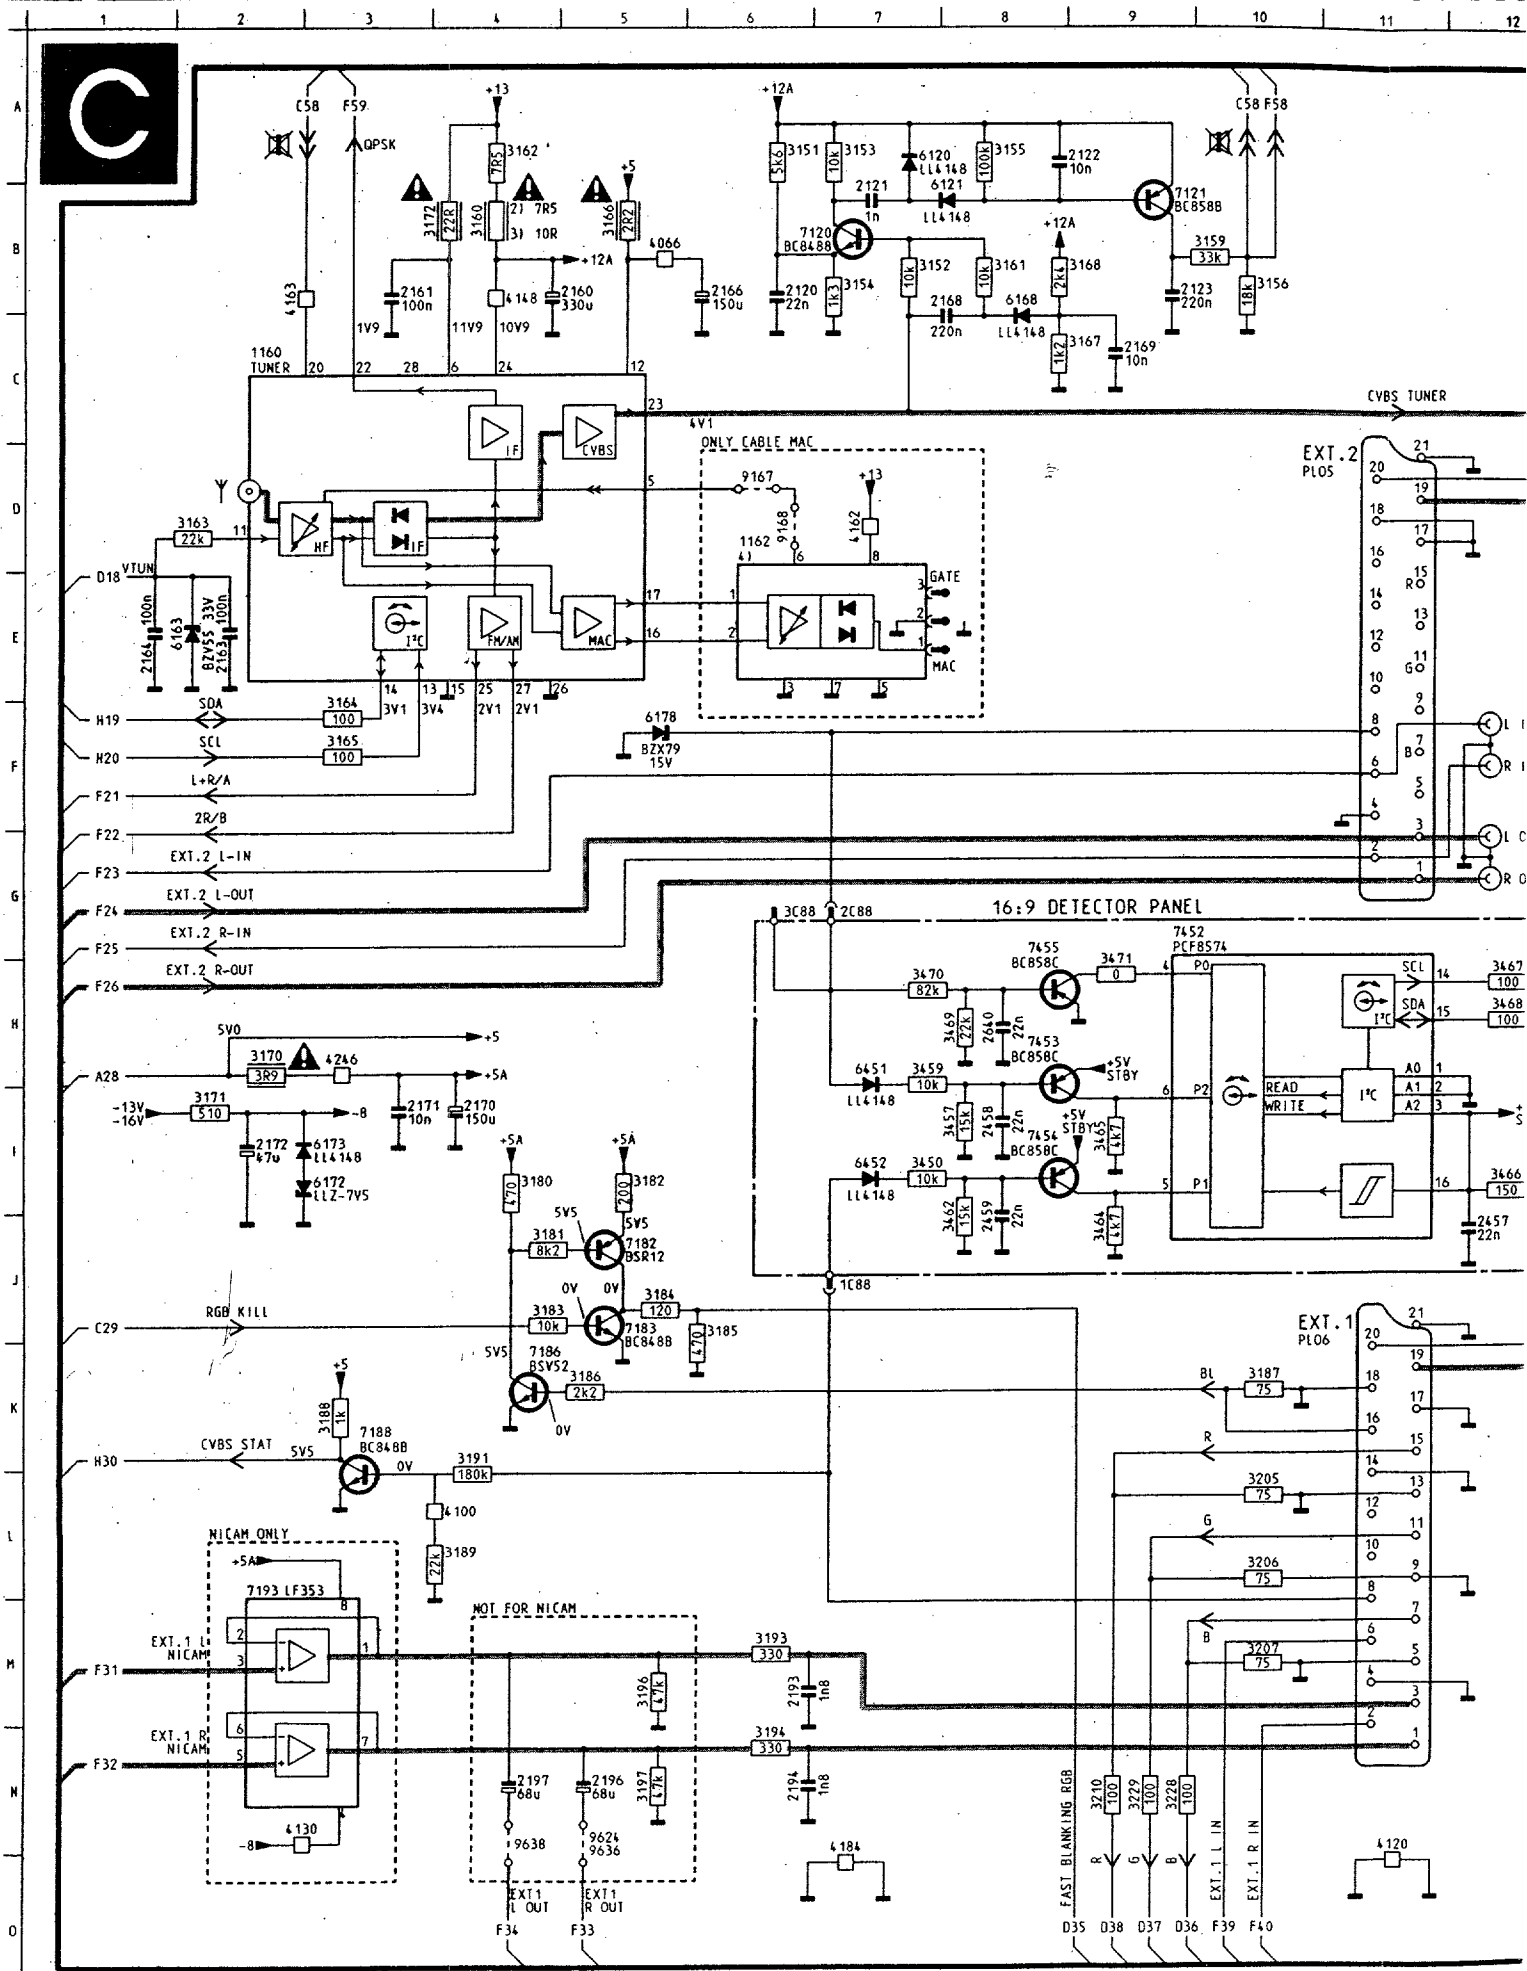


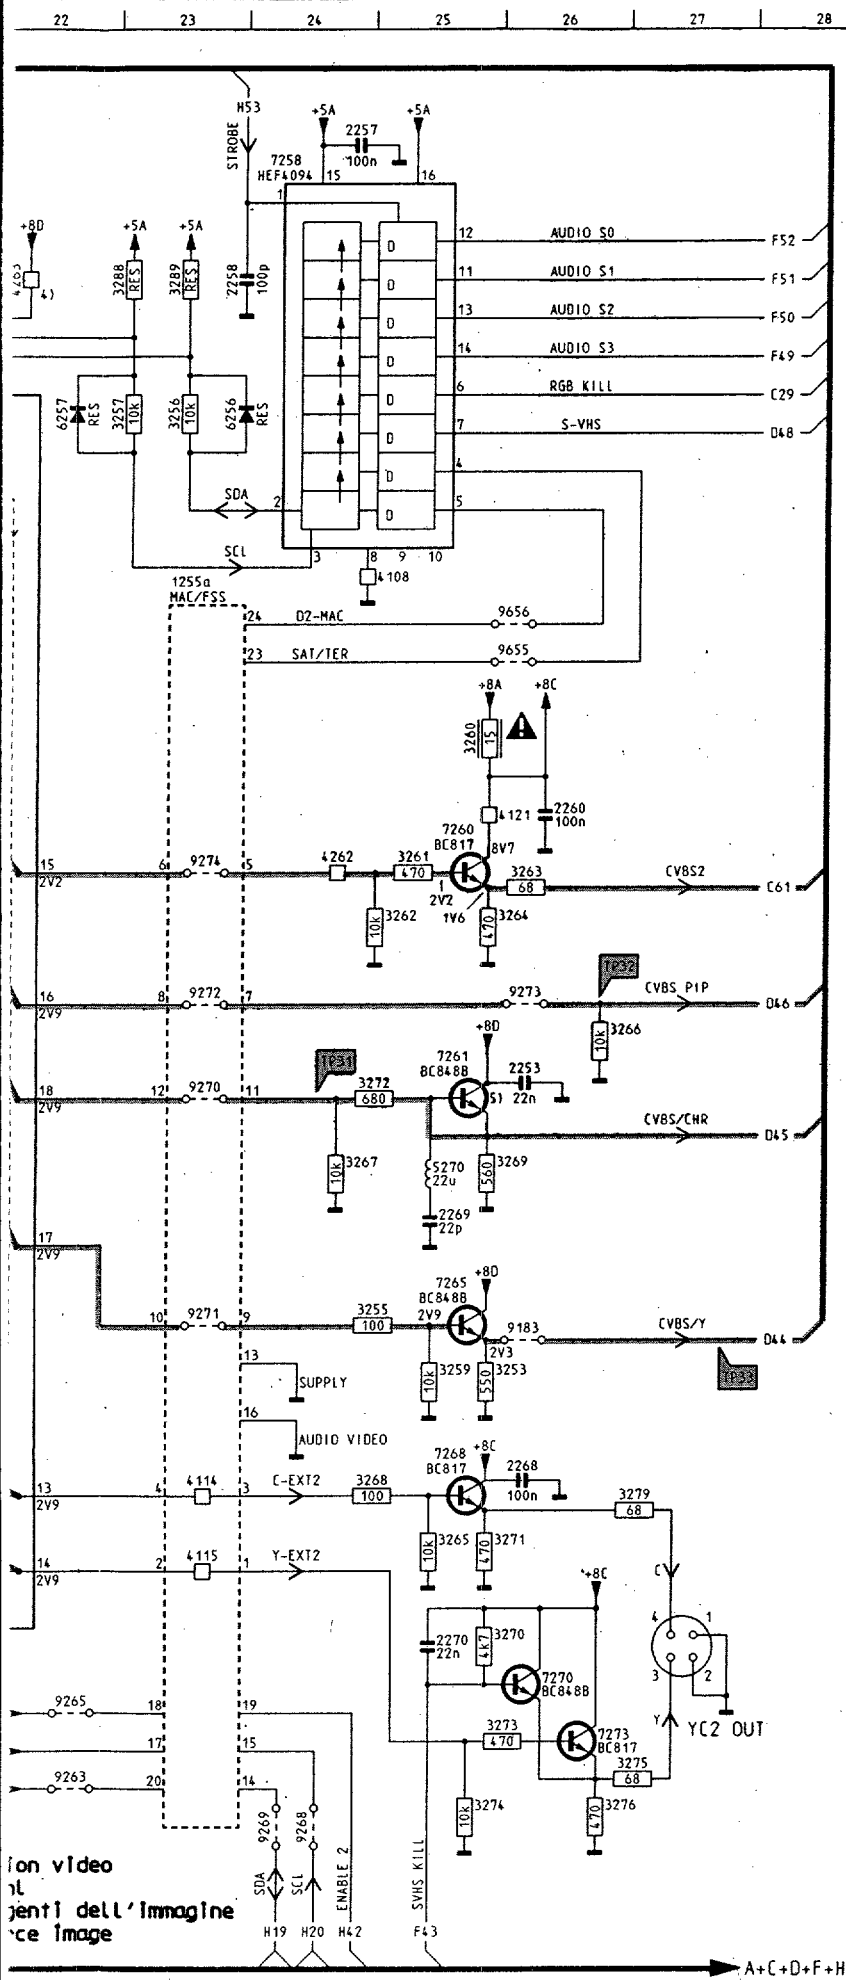


CHASSIS FL1.2

CL 16532023/013, CREF
270691

1160	C 2	3242	J16	9167	D 6
1162	D 6	3243	J17	9168	D 6
1231	G16	3244	K16	9183	J26
1248	H16	3245	L16	9263	M22
1255	E23	3246	L16	9265	M22
2120	B 6	3247	L16	9268	M24
2121	B 7	3248	M16	9269	M24
2122	A 8	3249	N19	9270	I23
2123	B 9	3250	N19	9271	J23
2160	B 5	3251	O15	9272	H23
2161	B 3	3252	O15	9273	H26
2163	E 2	3253	K25	9274	G23
2164	E 1	3254	O20	9624	N 5
2166	B 6	3255	J25	9636	N 5
2168	B 8	3256	C23	9638	N 4
2169	C 9	3257	C23	9650	H17
2170	I 4	3259	K25	9655	E26
2171	I 3	3260	F25	9656	E26
2172	I 2	3261	G25		
2193	M 6	3262	G25		
2194	M 6	3263	G26		
2196	N 5	3264	G25		
2197	N 4	3265	L25		
2216	C15	3266	H26		
2219	C19	3267	I24		
2224	D14	3268	L25		
2225	E15	3269	I25		
2226	F17	3270	M25		
2228	F15	3271	L25		
2234	I19	3272	I25		
2240	J19	3273	M26		
2241	K18	3274	N25		
2242	K15	3275	N27		
2243	K17	3276	N26		
2245	L15	3277	O20		
2249	N19	3279	L27		
2252	O19	3284	B20		
2253	H26	3285	B19		
2254	E20	3286	B21		
2255	E20	3287	B21		
2257	A24	3288	B23		
2258	B23	3289	B23		
2260	F26	3450	I 7		
2268	L26	3457	I 8		
2269	J25	3459	H 7		
2270	M25	3462	J 8		
2274	H19	3464	J 9		
2457	J12	3465	I 9		
2458	I 8	3466	I12		
2459	J 8	3467	H12		
2640	H 8	3468	H12		
3151	A 6	3469	H 8		
3152	B 7	3470	H 7		
3153	A 7	3471	H 9		
3154	B 7	4066	B 5		
3155	A 8	4100	L 4		
3156	B10	4108	E25		
3159	B10	4114	L23		
3160	B 4	4115	L23		
3161	B 8	4120	O11		
3162	A 4	4121	F25		
3163	D 2	4130	N 3		
3164	F 3	4148	B 4		
3165	F 3	4162	D 7		
3166	B 5	4163	B 2		
3167	C 9	4184	O 7		
3168	B 9	4227	E16		
3170	H 2	4241	B21		
3171	I 2	4246	H 3		
3172	B 4	4262	G24		
3180	I 4	4263	B22		
3181	J 4	4280	K20		
3182	I 5	5270	I25		
3183	J 4	6120	A 7		
3184	J 5	6121	B 8		
3185	J 6	6163	E 2		
3186	K 5	6168	B 8		
3187	K10	6172	I 3		
3188	K 3	6173	I 3		
3189	L 4	6178	F 5		
3191	K 4	6256	C23		
3193	M 6	6257	C22		
3194	N 6	6280	B20		
3196	M 5	6281	B21		
3197	N 5	6451	H 7		
3205	L10	6452	I 7		
3206	L10	7120	B 7		
3207	M10	7121	B 9		
3210	N 9	7182	J 5		
3211	C14	7183	J 5		
3215	B14	7186	K 4		
3216	B15	7188	K 3		
3217	C14	7193	L12		
3218	C15	7216	B15		
3219	C14	7219	C20		
3220	D19	7226	E16		
3222	G20	7228	F16		
3224	D13	7243	K16		
3225	D16	7244	L16		
3226	D17	7258	A24		
3227	E16	7260	G25		
3228	N 9	7261	H25		
3228	F16	7265	J25		
3229	N 9	7268	K25		
3229	F16	7270	N26		
3230	F16	7273	N26		
3231	G16	7452	G 9		
3232	G19	7453	H 8		
3233	H19	7454	I 8		
3234	I16	7455	G 8		
3235	I16	9102	M16		
3237	I19	9103	N19		
3238	J20	9105	N19		
3239	L20	9110	M17		
3240	J19	9115	O19		
3241	K19	9117	N19		

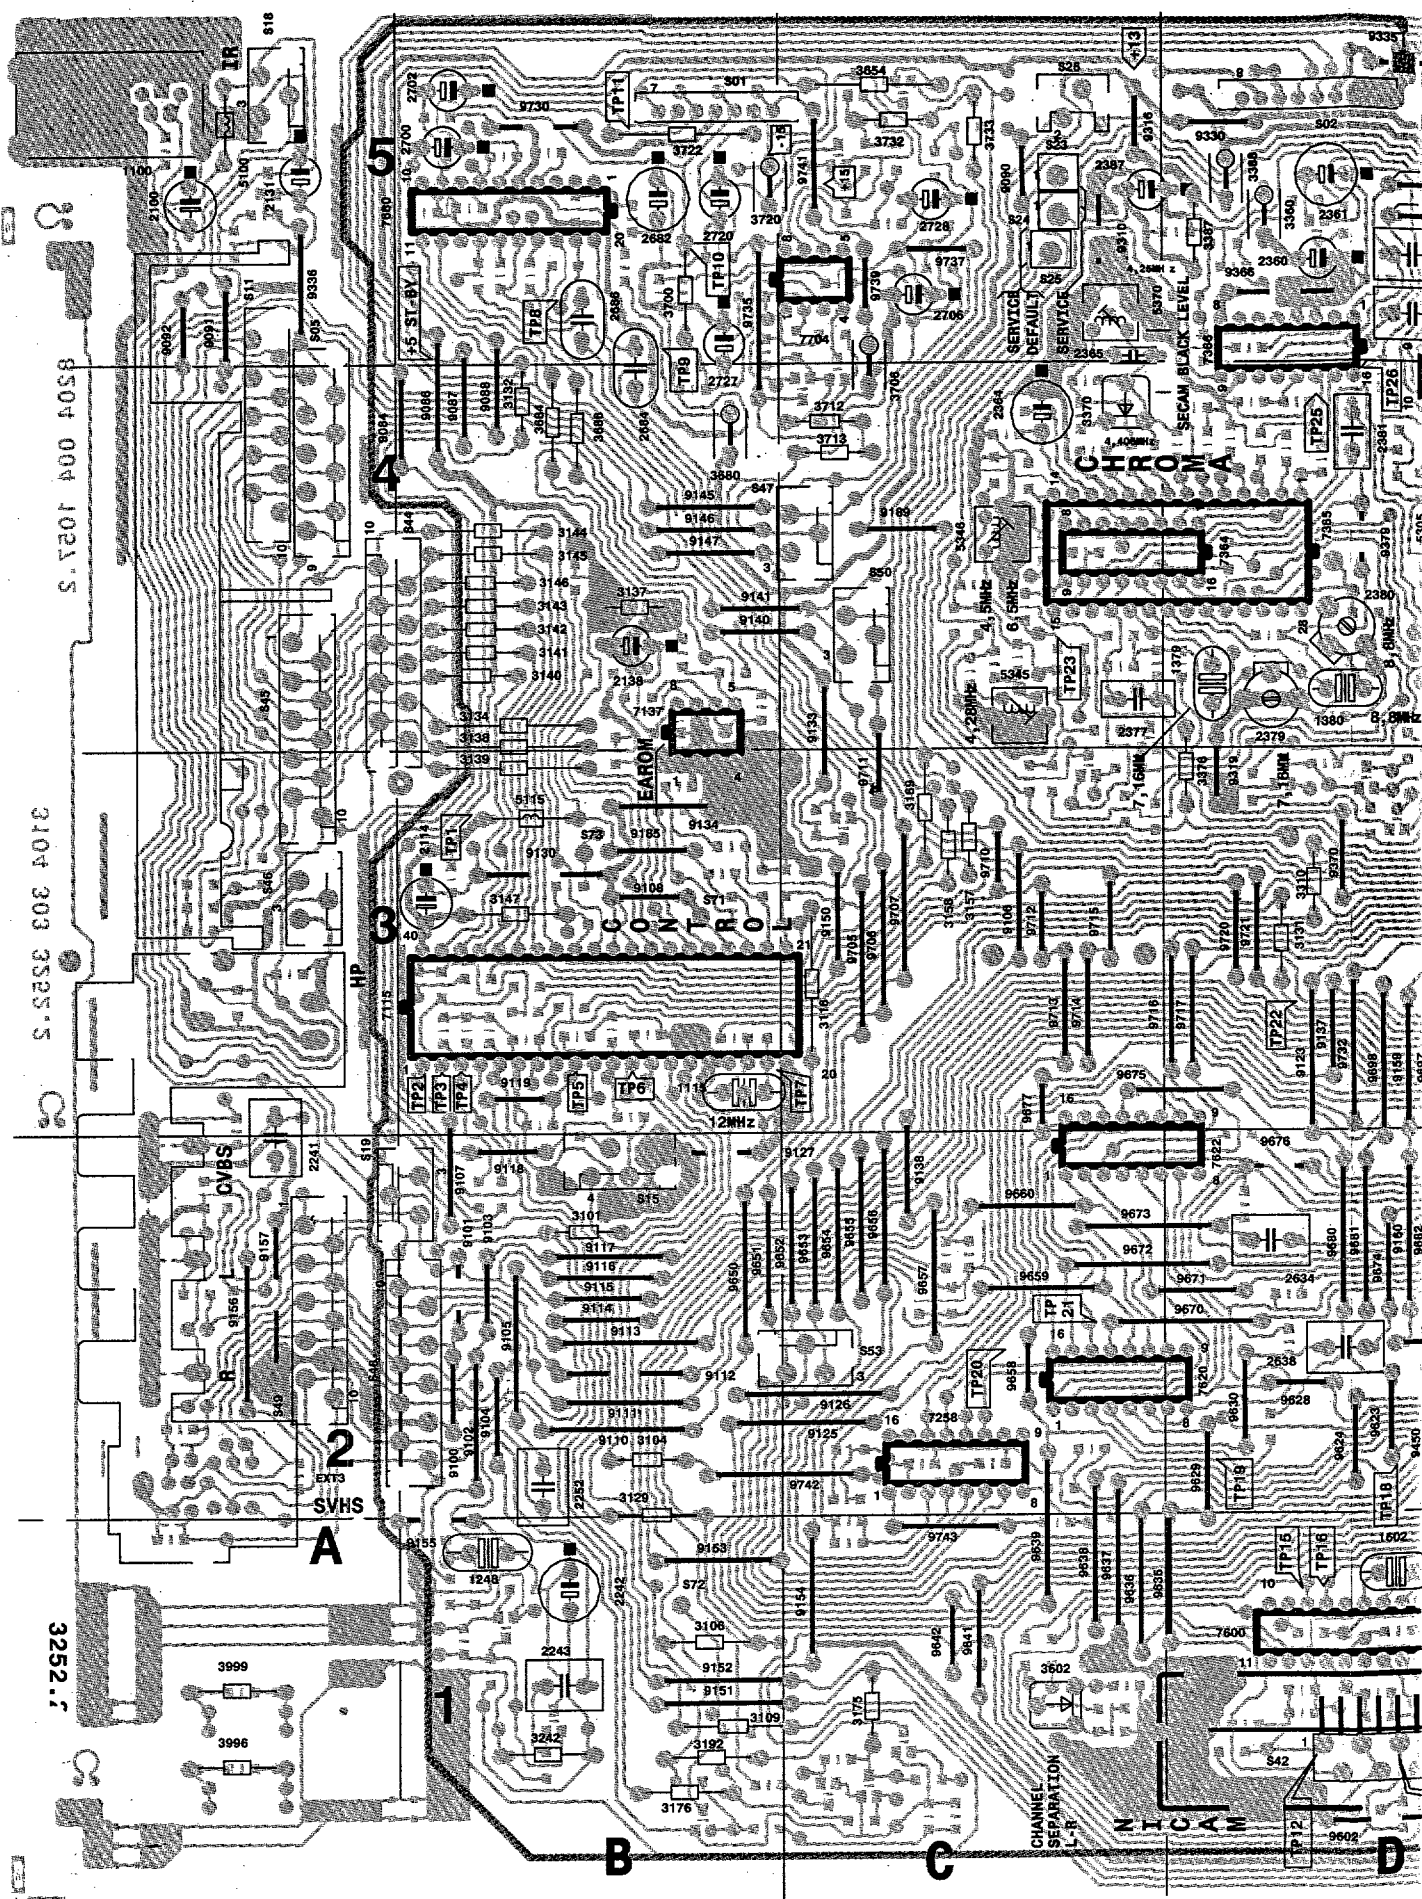


Platine petits signaux

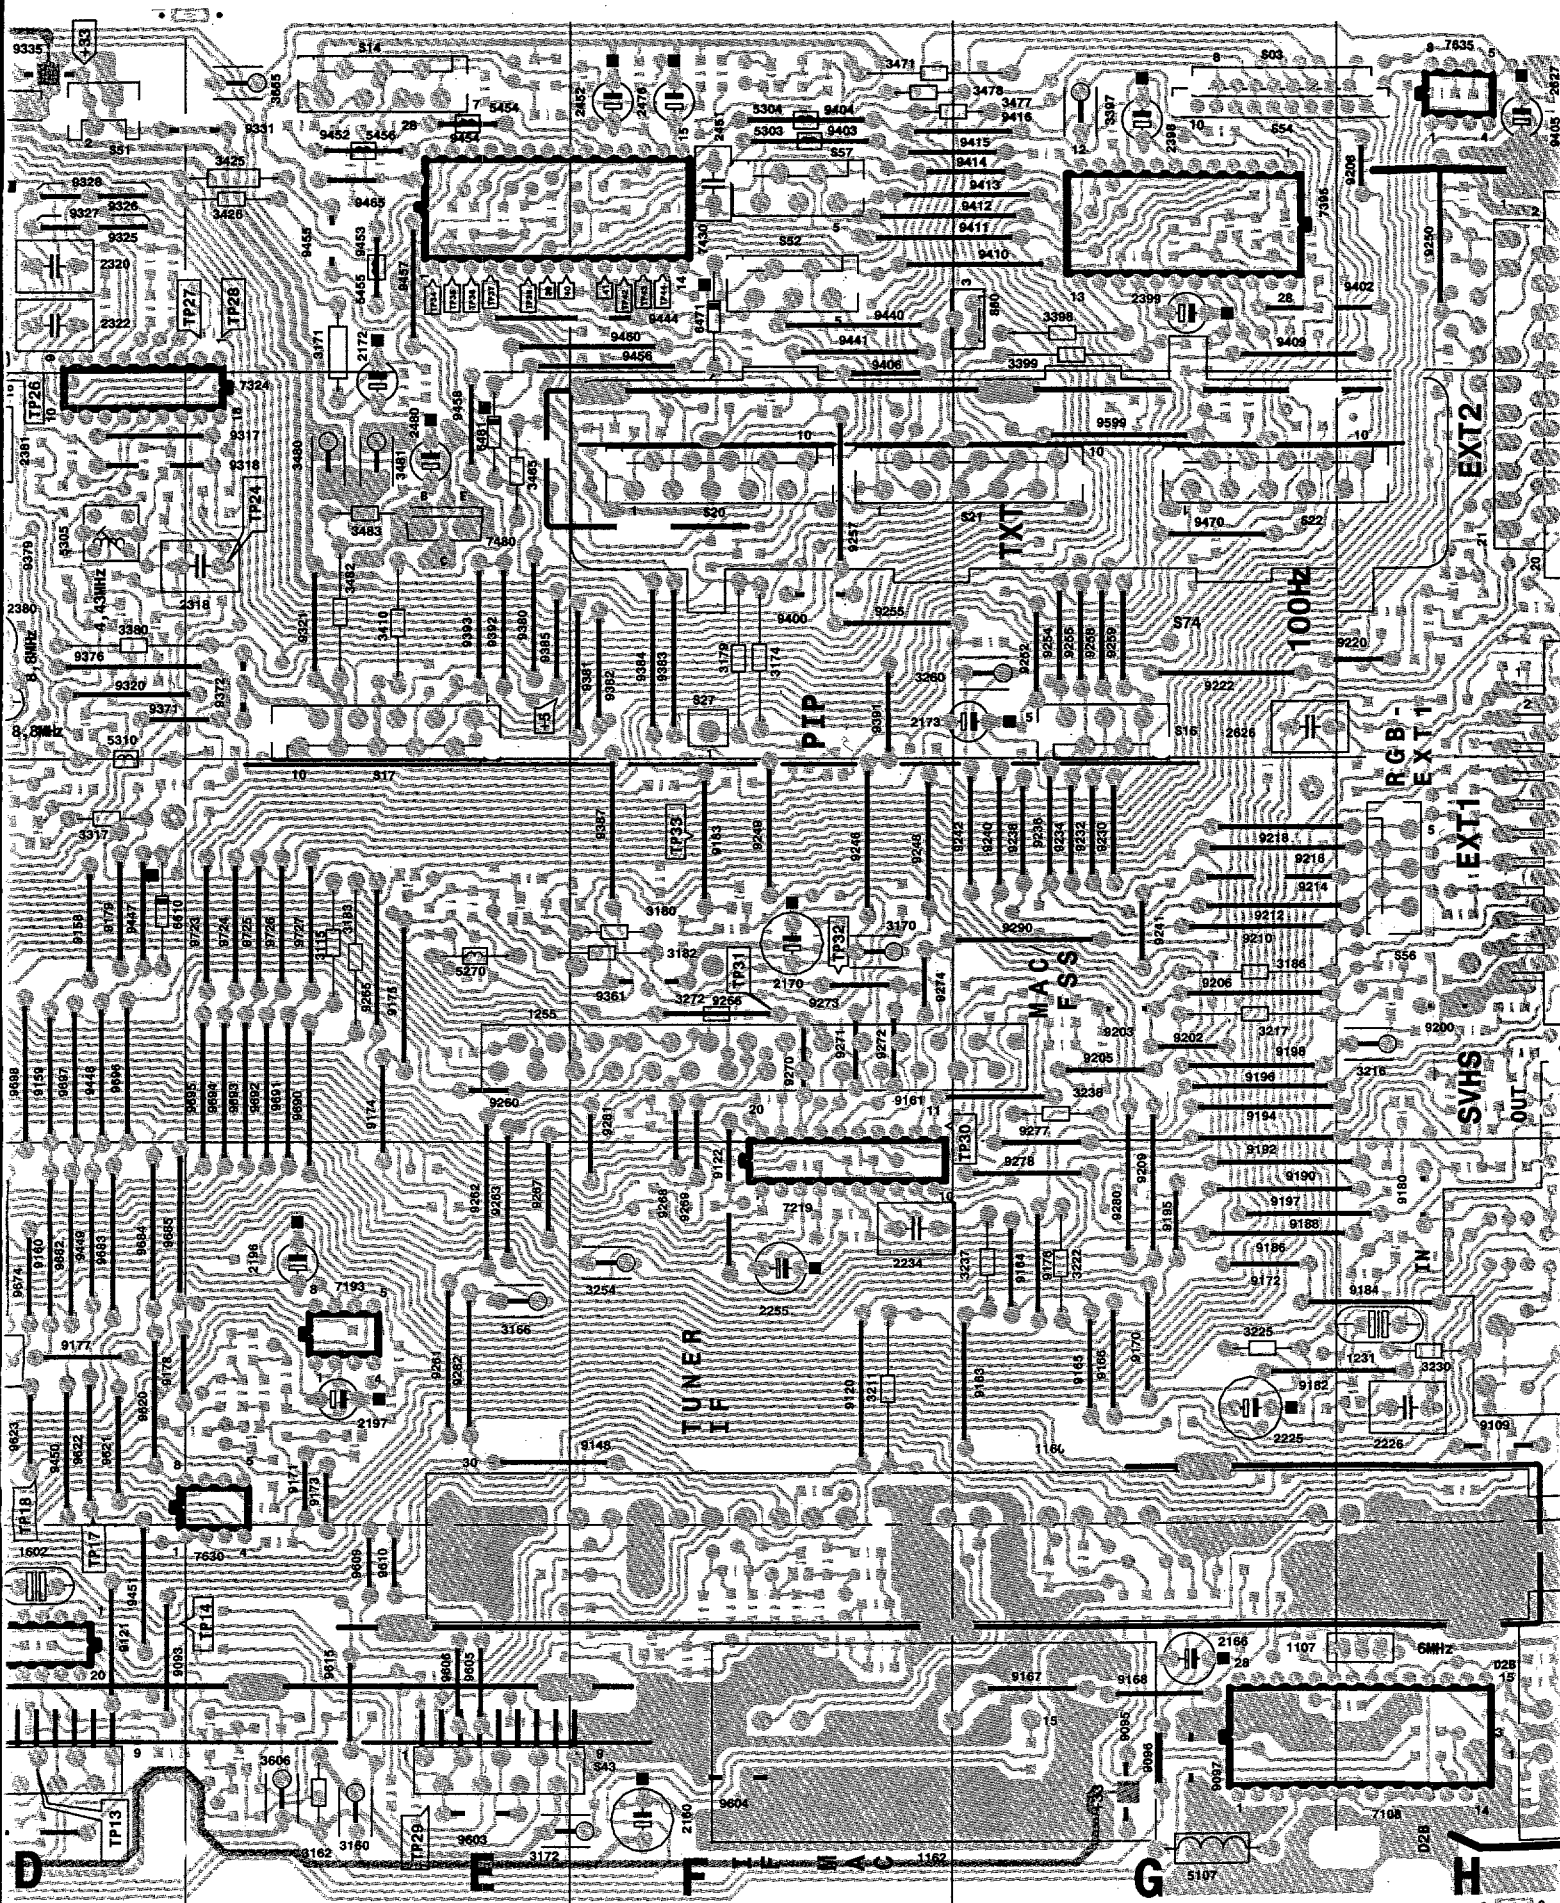



TP1	B3	2114	B3	3238	G3	9111	B2	9250	H5	9604	F1
TP2	B3	2131	A5	3242	B1	9112	B2	9252	G4	9605	E1
TP3	B3	2138	B4	3254	F2	9113	B2	9254	G4	9606	E1
TP4	B3	2160	F1	3260	G4	9114	B2	9255	F4	9609	E1
TP5	B3	2166	G1	3272	F3	9115	B2	9256	G4	9610	E1
TP6	B3	2170	F3	3310	D3	9116	B2	9257	F4	9615	E1
TP7	B3	2172	E4	3317	D3	9117	B2	9258	G4	9620	D2
TP8	B5	2173	G4	3360	D5	9118	B2	9259	G4	9621	D2
TP9	B5	2196	E2	3370	C4	9119	B3	9260	E3	9622	D2
TP10	B5	2197	E2	3376	D3	9120	F2	9261	E2	9623	D2
TP11	B5	2225	G2	3380	D4	9121	D1	9262	E2	9624	D2
TP12	D1	2226	H2	3387	D5	9122	F2	9263	E2	9628	D2
TP13	D1	2234	F2	3388	D5	9123	D3	9265	E3	9629	D2
TP14	D1	2241	A2	3397	G5	9125	C2	9266	F3	9630	D2
TP15	D1	2242	B1	3398	G5	9126	C2	9267	E2	9635	C1
TP16	D1	2243	B1	3399	G5	9127	B2	9268	F3	9636	C1
TP17	D2	2252	B2	3410	E4	9130	B3	9269	F2	9637	C1
TP18	D2	2255	F2	3425	E5	9133	C4	9270	F3	9638	C1
TP19	D2	2318	E4	3426	E5	9134	B3	9271	F3	9639	C1
TP20	C2	2320	D5	3465	E4	9137	D3	9272	F3	9641	C1
TP21	C2	2322	D5	3471	F5	9138	C2	9273	F3	9642	C1
TP22	D3	2360	D5	3477	F5	9140	B4	9274	F3	9650	B2
TP23	C4	2361	D5	3478	F5	9141	B4	9277	G2	9651	B2
TP24	E4	2364	C4	3480	E4	9145	B4	9278	G2	9652	C2
TP25	D4	2365	C4	3481	E4	9146	B4	9280	G2	9653	C2
TP26	D4	2377	C4	3482	E4	9147	B4	9281	F2	9654	C2
TP27	E5	2379	D4	3483	E4	9148	E2	9282	E2	9655	C2
TP28	E5	2380	D4	3602	C1	9150	C3	9290	G3	9656	C2
TP29	E1	2381	D4	3606	E1	9151	B1	9310	C5	9657	C2
TP30	F3	2387	C5	3654	C5	9152	B1	9316	C5	9658	C2
TP31	F3	2398	G5	3665	E5	9153	B1	9317	D4	9659	C2
TP32	F3	2399	G5	3680	B4	9154	C1	9318	D4	9660	C2
TP33	F3	2451	F5	3684	B4	9155	B1	9319	D3	9670	D2
TP34	E5	2452	F5	3686	B4	9156	A2	9320	D4	9671	D2
TP35	E5	2476	F5	3700	B5	9157	A2	9321	E4	9672	C2
TP36	E5	2480	E4	3706	C4	9158	D3	9325	D5	9673	C2
TP37	E5	2626	G4	3712	C4	9159	D3	9326	D5	9674	D2
TP38	E5	2627	H5	3713	C4	9160	D2	9327	D5	9675	D3
TP39	E5	2634	D2	3720	B5	9161	G3	9328	D5	9676	D2
TP40	E5	2638	D2	3722	B5	9163	G2	9330	D5	9677	C3
TP41	F5	2682	B5	3732	C5	9164	G2	9331	E5	9680	D2
TP42	F5	2684	B4	3733	C5	9165	G2	9335	D5	9681	D2
TP43	F5	2686	B5	3996	A1	9166	G2	9336	A5	9682	D2
TP44	F5	2700	B5	3999	A1	9167	G1	9361	F3	9683	D2
D2B	H1	2702	B5	5100	A5	9168	G1	9366	D5	9684	D2
EXT1	H3	2706	C5	5107	G1	9170	G2	9370	D3	9685	D2
EXT2	H4	2720	B5	5115	B3	9171	E2	9371	D4	9690	E3
EXT3	A3	2727	B5	5270	E3	9172	G2	9372	E4	9691	E3
S01	B5	2728	C5	5303	F5	9173	E2	9376	D4	9692	E3
S02	D5	3101	B2	5304	F5	9174	E3	9379	D4	9693	E3
S03	H5	3104	B2	5305	D4	9175	E3	9380	E4	9694	E3
S05	A4	3106	B1	5310	D3	9176	G2	9381	F4	9695	E3
S11	A5	3109	B1	5345	C4	9177	D2	9382	F4	9696	D3
S14	E5	3115	E3	5346	C4	9178	D2	9383	F4	9697	D3
S15	B2	3116	C3	5370	C5	9179	D3	9384	F4	9698	D3
S16	G4	3129	B2	5454	E5	9180	H2	9385	E4	9705	C3
S17	E4	3131	D3	5455	E5	9182	G2	9387	F3	9706	C3
S18	A5	3132	B4	5456	E5	9183	F3	9391	F4	9707	C3
S19	B2	3134	B4	6471	F5	9184	H2	9392	E4	9710	C3
S20	F4	3137	B4	6481	E4	9185	B3	9393	E4	9711	C3
S21	F4	3138	B3	6610	D3	9186	G2	9400	F4	9712	C3
S22	G4	3139	B3	7115	B3	9188	G2	9402	G5	9713	C3
S23	C5	3140	B4	7137	B3	9189	C4	9403	F5	9714	C3
S24	C5	3141	B4	7193	E2	9190	G2	9404	F5	9715	C3
S25	C5	3142	B4	7219	F2	9192	G2	9405	H5	9716	D3
S26	C5	3143	B4	7324	E5	9194	G3	9406	F4	9717	D3
S27	F4	3144	B4	7366	D5	9195	G2	9409	G5	9720	D3
S42	D1	3145	B4	7395	G5	9196	G3	9410	G5	9721	D3
S43	E1	3146	B4	7430	E5	9197	G2	9411	F5	9723	E3
S44	B4	3147	B3	7480	E4	9198	G3	9412	F5	9724	E3
S45	A4	3157	C3	7635	H5	9200	H3	9413	G5	9725	E3
S46	A3	3158	C3	7680	B5	9202	G3	9414	G5	9726	E3
S47	C4	3160	E1	7704	C5	9203	G3	9415	F5	9727	E3
S48	B2	3162	E1	9084	B4	9205	G3	9416	G5	9730	B5
S49	A2	3166	E2	9086	B4	9206	G3	9440	F5	9732	D3
S50	C4	3169	C3	9087	B4	9208	H5	9441	F5	9735	B5
S51	D5	3170	F3	9088	B4	9209	G2	9444	F5	9737	C5
S52	F5	3171	E5	9090	C5	9210	G3	9447	D3	9739	C5
S53	C2	3172	E1	9091	A5	9212	G3	9448	D3	9741	C5
S54	H5	3174	F4	9092	A5	9214	G3	9449	D2	9742	B2
S56	H3	3175	C1	9093	D1	9216	G3	9450	D2	9743	C1
S57	F5	3176	B1	9095	G1	9218	G3	9451	D1		
S60	G5	3179	F4	9096	G1	9220	H4	9452	E5		
SVHS	H2	3180	F3	9097	G1	9222	G4	9453	E5		
1100	A5	3182	F3	9100	B2	9230	G3	9454	E5		
1107	G1	3183	E3	9101	B2	9232	G3	9455	E5		
1115	B3	3186	G3	9102	B2	9234	G3	9456	F4		
1160	E2	3192	B1	9103	B2	9236	G3	9457	E5		
1162	F1	3211	F2	9104	B2	9238	G3	9458	E4		
1231	H2	3216	H3	9105	B2	9240	G3	9460	F5		
1248	B1	3217	G3	9106	C3	9241	G3	9465	E5		
1379	D4	3222	G2	9107	B2	9242	G3	9470	G4		
1380	D4	3225	G2	9108	B3	9246	F3	9599	G4		
1602	D1	3230	H2	9109	H2	9248	F3	9602	D1		
2100	A5	3237	G2	9110	B2	9249	F3	9603	E1		


**16:9
Detector
Panel**

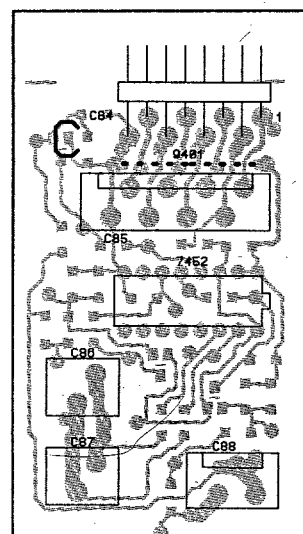


16:9
Detector
Panel

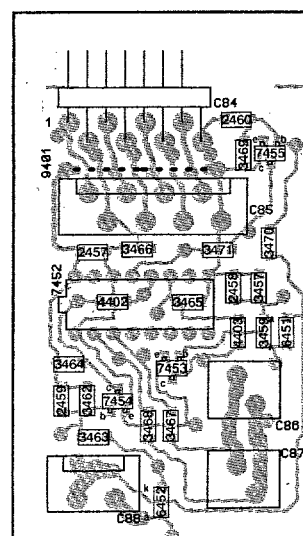


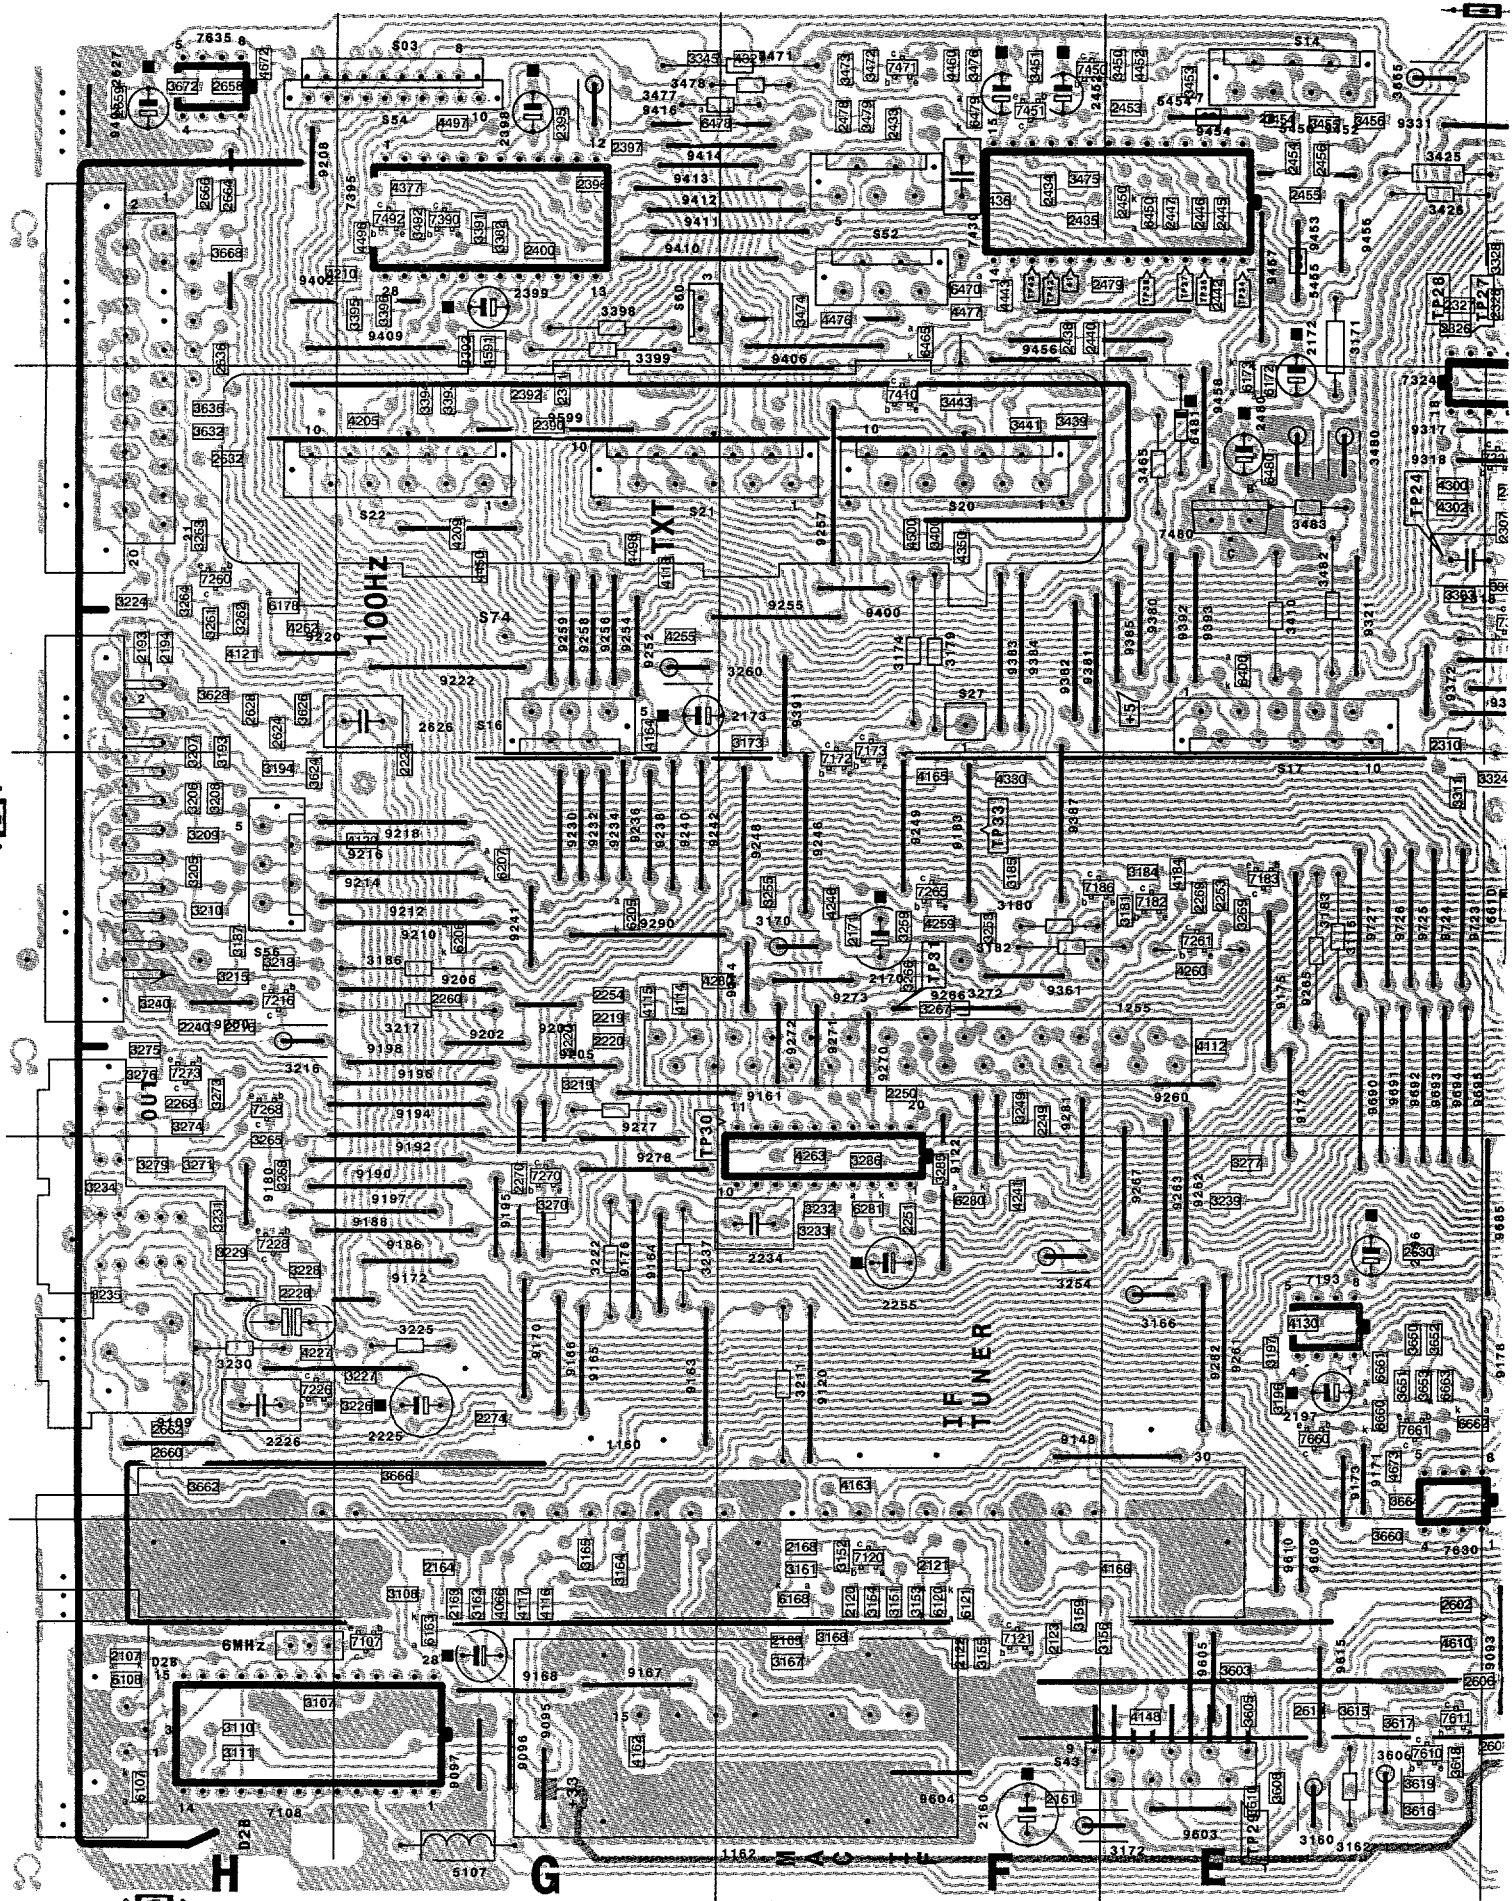


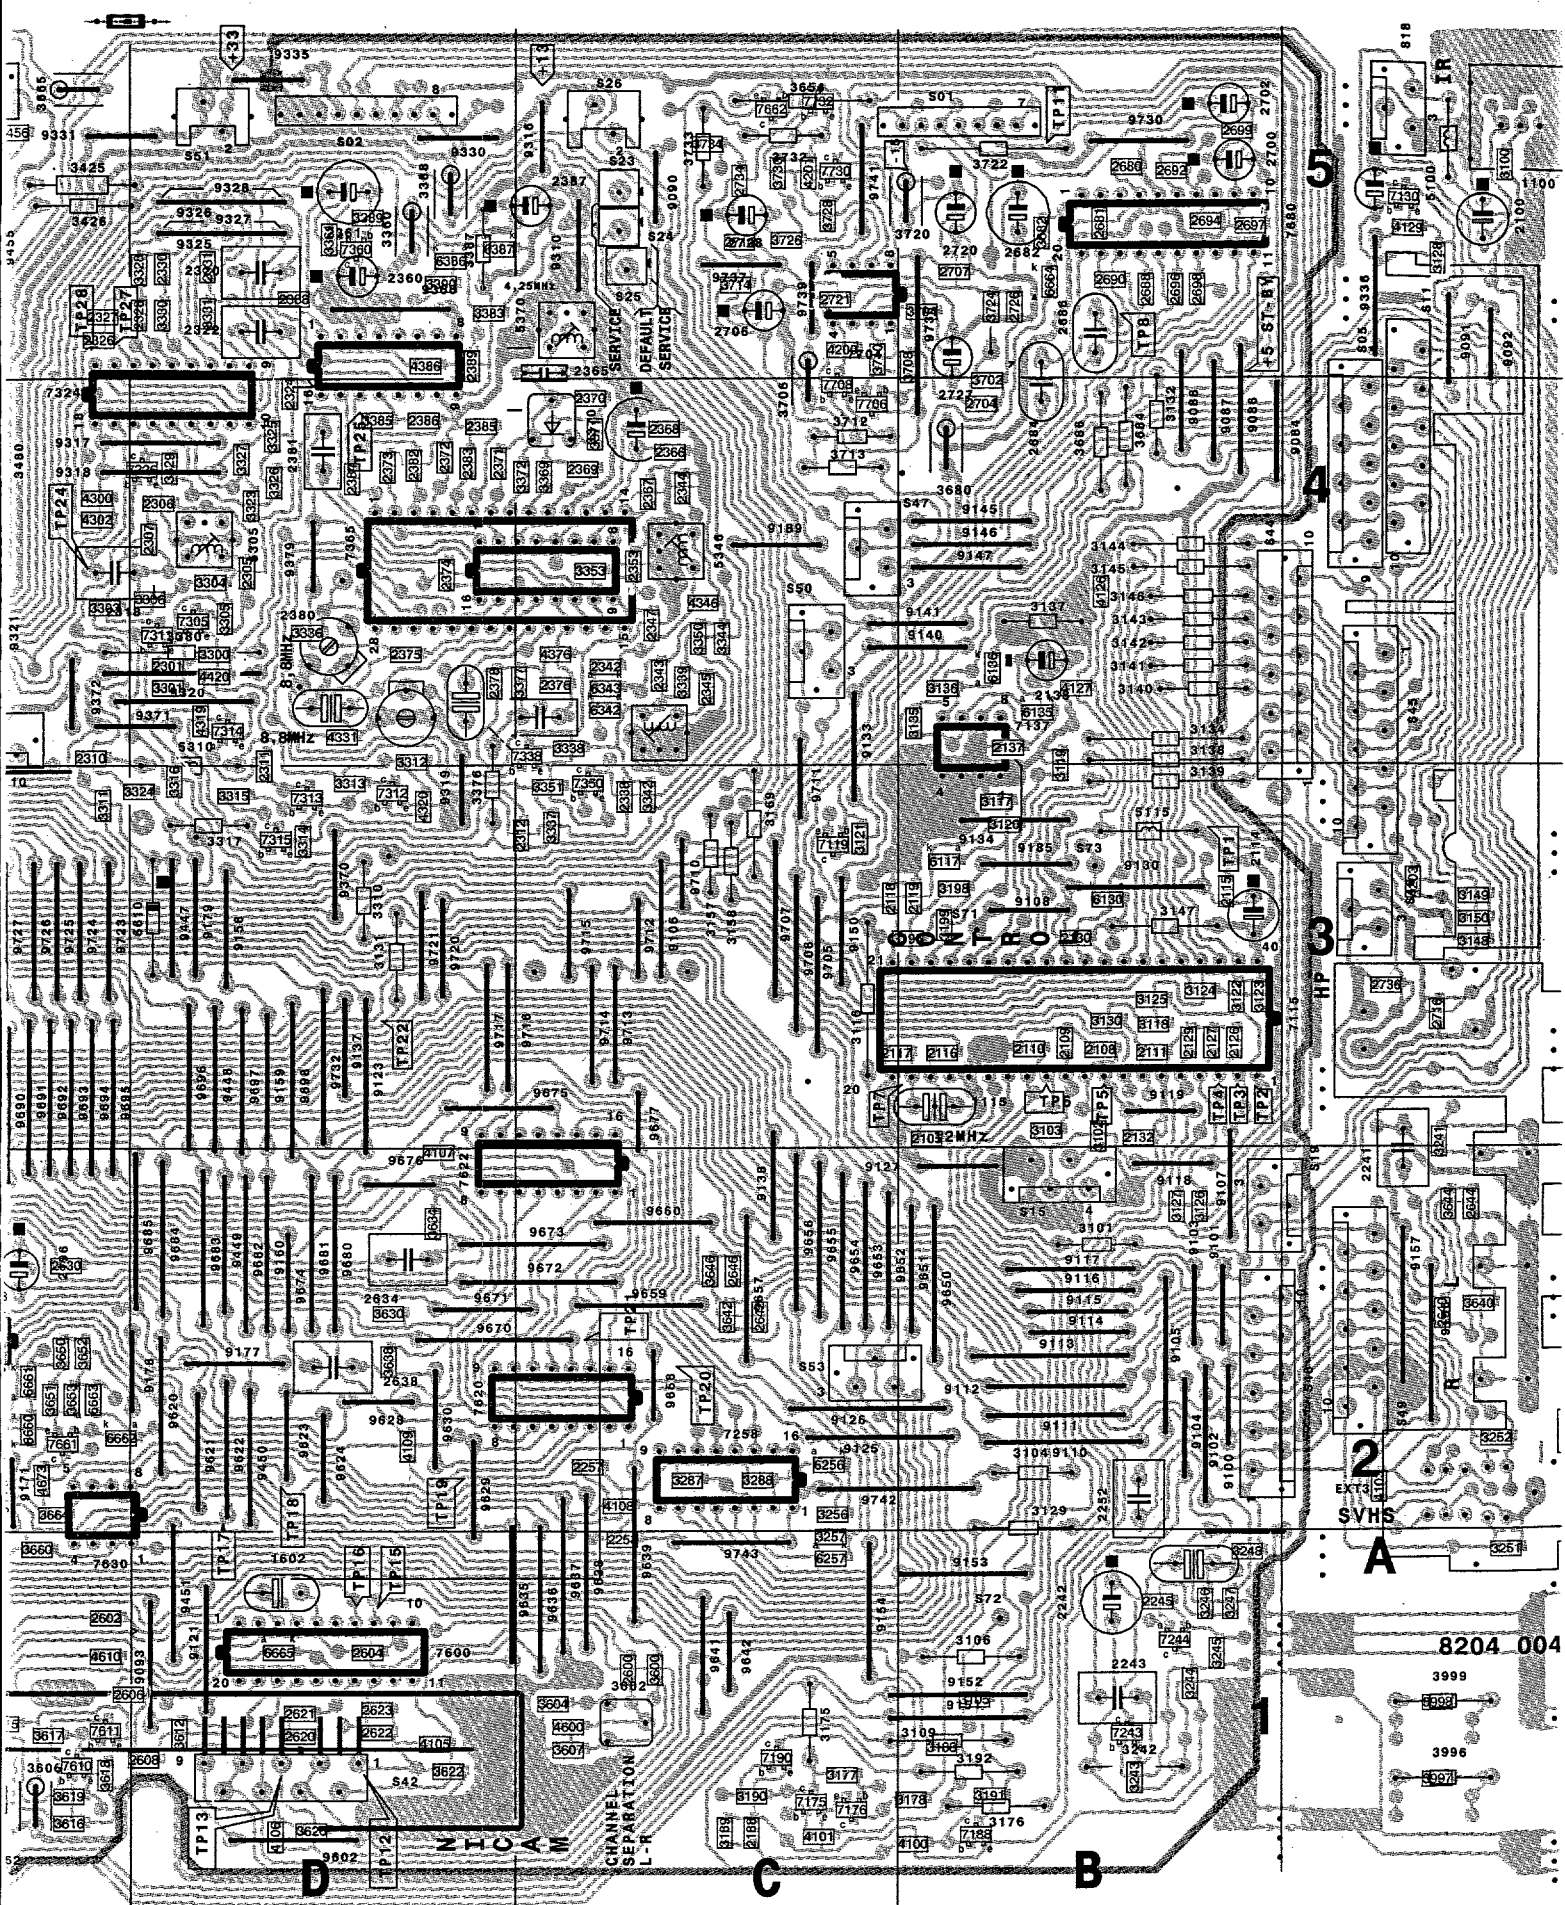

TP1	B3	2105	B3	2367	C4	2700	B5	3185	F3	3314	D3	3628	H4	4321	F5	7193	E2	9138	C2	9273	F3	9642	C1
TP2	B3	2107	H1	2368	C4	2702	B5	3186	G3	3315	D3	3630	D2	4330	F3	7216	H3	9140	B4	9274	F3	9650	B2
TP3	B3	2108	B3	2369	C4	2704	B4	3187	H3	3316	D3	3632	H4	4331	D4	7219	F2	9141	B4	9277	G2	9651	B2
TP4	B3	2109	B3	2370	C4	2706	C5	3188	B1	3317	D3	3634	D2	4346	C4	7226	H2	9145	B4	9278	G2	9652	C2
TP5	B3	2110	B3	2371	D4	2707	B5	3189	C1	3323	D4	3636	H4	4350	F4	7228	H2	9146	B4	9280	G2	9653	C2
TP6	B3	2111	B3	2372	D4	2714	C5	3190	C1	3324	D3	3638	D2	4376	C4	7243	B1	9147	B4	9281	F2	9654	C2
TP7	B3	2114	B3	2373	D4	2716	A3	3191	B1	3325	D4	3640	A2	4377	G5	7244	B1	9148	E2	9282	E2	9655	C2
TP8	B5	2115	B3	2374	D4	2720	B5	3192	B1	3326	D4	3642	C2	4386	D5	7258	C2	9150	C3	9290	G3	9656	C2
TP9	B5	2116	B3	2375	D4	2721	C5	3193	H3	3327	D4	3644	A2	4420	D4	7260	H4	9151	B1	9310	C5	9657	C2
TP10	B5	2117	B3	2376	C4	2726	B5	3194	H3	3328	D5	3646	C2	4443	F5	7261	E3	9152	B1	9316	C5	9658	C2
TP11	B5	2118	C3	2377	C4	2727	B5	3195	B3	3329	D4	3650	E2	4450	G4	7265	F3	9153	B1	9317	D4	9659	C2
TP12	D1	2119	B3	2378	D4	2728	C5	3196	E2	3330	D5	3651	E2	4452	E5	7268	H3	9154	C1	9318	D4	9660	D2
TP13	D1	2120	F1	2379	D4	2734	C5	3197	E2	3331	D5	3652	E2	4460	F5	7270	G2	9155	B1	9319	D3	9670	C2
TP14	D1	2121	F1	2380	D4	2736	A3	3198	B3	3336	D4	3653	E2	4476	F5	7273	H3	9156	A2	9320	D4	9671	D2
TP15	D1	2122	F1	2381	D4	3100	A5	3199	B3	3337	C3	3654	C5	4477	F5	7305	D4	9157	A2	9321	E4	9672	C2
TP16	D1	2123	F1	2382	D4	3101	B2	3205	H3	3338	C4	3660	E1	4496	G5	7311	D4	9158	D3	9325	D5	9673	C2
TP17	D2	2126	B3	2383	D4	3102	B3	3206	H3	3339	C4	3662	H2	4497	G5	7312	D3	9159	D3	9326	D5	9674	D2
TP18	D2	2127	B3	2384	D4	3103	B3	3207	H3	3342	C3	3664	E2	4498	G4	7313	D3	9160	D2	9327	D5	9675	D3
TP19	D2	2129	B3	2385	D4	3104	B2	3208	H3	3344	C4	3665	E5	4500	F4	7314	D4	9161	G3	9328	D5	9676	D2
TP20	C2	2130	B3	2386	D4	3105	B1	3209	H3	3345	G5	3666	G2	4591	G5	7315	D3	9163	G2	9330	D5	9677	C3
TP21	C2	2131	A5	2387	C5	3106	B1	3210	H3	3350	C4	3668	H5	4600	C1	7324	E5	9164	G2	9331	E5	9680	D2
TP22	D3	2132	B3	2388	D5	3107	H1	3211	F2	3351	C3	3672	H5	4610	E1	7326	D4	9165	G2	9335	D5	9681	D2
TP23	C4	2137	B4	2389	D5	3108	G1	3215	H3	3353	C4	3680	B4	4672	H5	7338	C4	9166	G2	9336	A5	9682	D2
TP24	E4	2138	B4	2390	G4	3109	B1	3216	H3	3360	D5	3682	B5	4673	E2	7350	C3	9167	G1	9361	F3	9683	D2
TP25	D4	2160	F1	2391	G4	3110	H1	3217	G3	3361	D5	3684	B4	5100	A5	7360	D5	9168	G1	9366	D5	9684	D2
TP26	D4	2161	F1	2392	G4	3111	H1	3218	H3	3369	C4	3686	B4	5107	G1	7364	D4	9170	G2	9370	D3	9685	D2
TP27	E5	2163	G1	2395	G5	3115	E3	3219	G3	3370	C4	3700	B5	5115	B3	7365	D4	9171	E2	9371	D4	9690	E3
TP28	E5	2164	G1	2396	G5	3116	C3	3220	G3	3371	C4	3702	B4	5270	E3	7366	D5	9172	G2	9372	E4	9691	E3
TP29	E1	2166	G1	2397	G5	3117	B3	3222	G2	3372	C4	3704	B5	5303	F5	7390	G5	9173	E2	9376	D4	9692	E3
TP30	F3	2168	F1	2398	G5	3118	B3	3224	H4	3376	D3	3706	C4	5304	F5	7395	G5	9174	E3	9379	D4	9693	E3
TP31	F3	2169	F1	2399	G5	3119	B3	3225	G2	3377	C4	3708	B5	5305	D4	7410	F4	9175	E3	9380	E4	9694	E3
TP32	F3	2170	F3	2400	G5	3120	B3	3226	G2	3380	D4	3710	C5	5310	D3	7430	E5	9176	G2	9381	F4	9695	E3
TP33	F3	2171	F3	2433	F5	3121	C3	3227	G2	3382	G5	3712	C4	5345	C4	7450	F5	9177	D2	9382	F4	9696	D3
TP34	E5	2172	E4	2434	F5	3122	B3	3228	H2	3383	D5	3713	C4	5346	C4	7451	F5	9178	D2	9383	F4	9697	D3
TP35	E5	2173	G4	2435	F5	3123	B3	3229	H2	3385	D4	3714	C5	5370	E5	7471	F5	9179	D3	9384	F4	9698	D3
TP36	E5	2188	C1	2436	F5	3124	B3	3230	H2	3387	D5	3720	B5	5454	E5	7480	E4	9180	H2	9385	E4	9705	C3
TP37	E5	2193	H4	2438	F5	3125	B3	3231	H2	3388	D5	3722	B5	5455	E5	7492	G5	9182	G2	9387	F3	9706	C3
TP38	E5	2194	H4	2440	F5	3126	B2	3232	F2	3389	D5	3724	B5	5456	E5	7600	D1	9183	F3	9391	F4	9707	C3
TP39	E5	2196	E2	2442	E5	3127	B2	3233	F2	3390	D5	3726	C5	6107	H1	7610	E1	9184	H2	9392	E4	9710	C3
TP40	E5	2197	E2	2445	E5	3128	A5	3234	H2	3391	G5	3728	C5	6108	H1	7611	E1	9185	B3	9393	E4	9711	C3
TP41	F5	2216	H3	2446	E5	3129	B2	3235	H2	3392	G5	3730	C5	6117	B3	7620	C2	9186	G2	9400	F4	9712	C3
TP42	F5	2219	G3	2447	E5	3130	B3	3237	G2	3393	G4	3732	C5	6120	F1	7622	C2	9188	G2	9402	G5	9713	C3
TP43	F5	2220	G3	2450	E5	3131	D3	3238	G3	3394	G4	3733	C5	6121	F1	7630	D1	9189	C4	9403	F5	9714	C3
TP44	F5	2224	G3	2451	F5	3132	B4	3239	E2	3395	G5	3734	C5	6130	B3	7635	H5	9190	G2	9404	F5	9715	C3
D2B	H1	2225	G2	2452	F5	3134	B4	3240	H3	3396	G5	3996	A1	6135	B4	7660	E2	9192	G2	9405	H5	9716	D3
EXT1	H3	2226	H2	2453	E5	3135	B4	3241	A3	3397	G5	3997	A1	6136	B4	7661	E2	9194	G3	9406	F4	9717	D3
EXT2	H4	2228	H2	2454	E5	3136	B4	3242	B1	3398	G5	3998	A1	6163	G1	7662	C5	9195	G2	9409	G5	9720	D3
EXT3	A3	2234	F2	2455	E5	3137	B4	3243	B1	3399	G5	3999	A1	6168	F1	7680	B5	9196	G3	9410	G5	9721	D3
S01	B5	2240	H3	2456	E5	3138	B3	3244	B1	3400	F4	4066	G1	6172	E4	7704	C5	9197	G2	9411	F5	9723	E3
S02	D5	2241	A2	2476	F5	3139	B3	3245	B1	3410	E4	4100	B1	6173	E4	7706	C4	9198	G3	9412	F5	9724	E3
S03	H5	2242	B1	2478	F5	3140	B4	3246	B1	3425	E5	4101	C1	6178	H4	7708	C4	9200	H3	9413	G5	9725	E3
S05	A4	2243	B1	2479	E5	3141	B4	3247	B1	3426	E5	4103	A2	6205	G3	7730	C5	9202	G3	9414	G5	9726	E3
S11	A5	2245	B1	2480	E4	3142	B4	3248	B1	3439	F4	4105	D1	6206	G3	7732	C5	9203	G3	9415	F5	9727	E3
S14	E5	2249	F3	2600	C1	3143	B4	3249	F3	3441	F4	4106	D1	6207	G3	9084	B4	9205	G3	9416	G5	9730	B5
S15	B2	2250	F3	2602	E1	3144	B4	3251	A1	3443	F4	4107	D2	6256	C2	9086	B4	9206	G3	9440	F5	9732	D3
S16	G4	2251	F2	2604	D1	3145	B4	3252	A2	3450	E5	4108	C2	6257	C1	9087	B4	9208	H5	9441	F5	9735	B5
S17	E4	2252	B2	2606	D1	3146	B4	3253	F3	3451	F5	4109	D2	6280	F2	9088	B4	9209	G2	9444	F5	9737	C5
S18	A5	2253	E3	2608	D1	3147	B3	3254	F2	3453	E5	4112	E3	6281	F2	9090	C5	9210	G3	9447	D3	9739	C5
S19	B2	2254	G3	2610	E1	3148	A3	3255	F3	3454	E5	4114	G3	6342	C4	9091	A5	9212	G3	9448	D3	9741	C5
S20	F4	2255	F2	2620	D1	3149	A3	3256	C2	3455	E5	4115	G3	6343	C4	9092	A5	9214	G3	9449	D2	9742	B2
S21	F4	2257	C2	2621	D1	3150	A3	3257	C1	3456	E5	4116	G1	6386	D5	9093	D1	9216	G3	9450	D2	9743	C1
S22	G4	2258	C1	2622	D1	3151	F1	3259	F3	3465	E4	4117	G1	6387	D5	9095	G1	9218	G3	9451	D1		
S23	C5	2260	G3	2623	D1	3152	F1	3260	G4	3471	F5	4118	G4	6400	E4	9096	G1	9220	H4	9452	E5		
S24	C5	2268	H3	2624	H4	3153	F1	3261	H4	3472	F5	4120	G3	6450	E5	9097	G1	9222	G4	9453	E5		
S25	C5	2269	E3	2626	G4	3154	F1	3262	H4	3473	F5	4121	H4	6465	F5	9100	B2	9230	G3	9454	E5		
S26	C5	2270	G2	2627	H5	3155	F1	3263	H4	3474	F5	4126	B4	6470	F5	9101	B2	9232	G3	9455	E5		
S27	F4	2274	G2	2628	H4	3156	E1	3264	H4	3475	F5	4127	B4	6471	F5	9102	B2	9234	G3	9456	F4		
S42	D1	2301	D4	2630	E2	3157	C3	3265	H2	3476	F5	4129	A5	6478	F5	9103	B2	9236	G3	9457	E5		
S43	E1	230																					

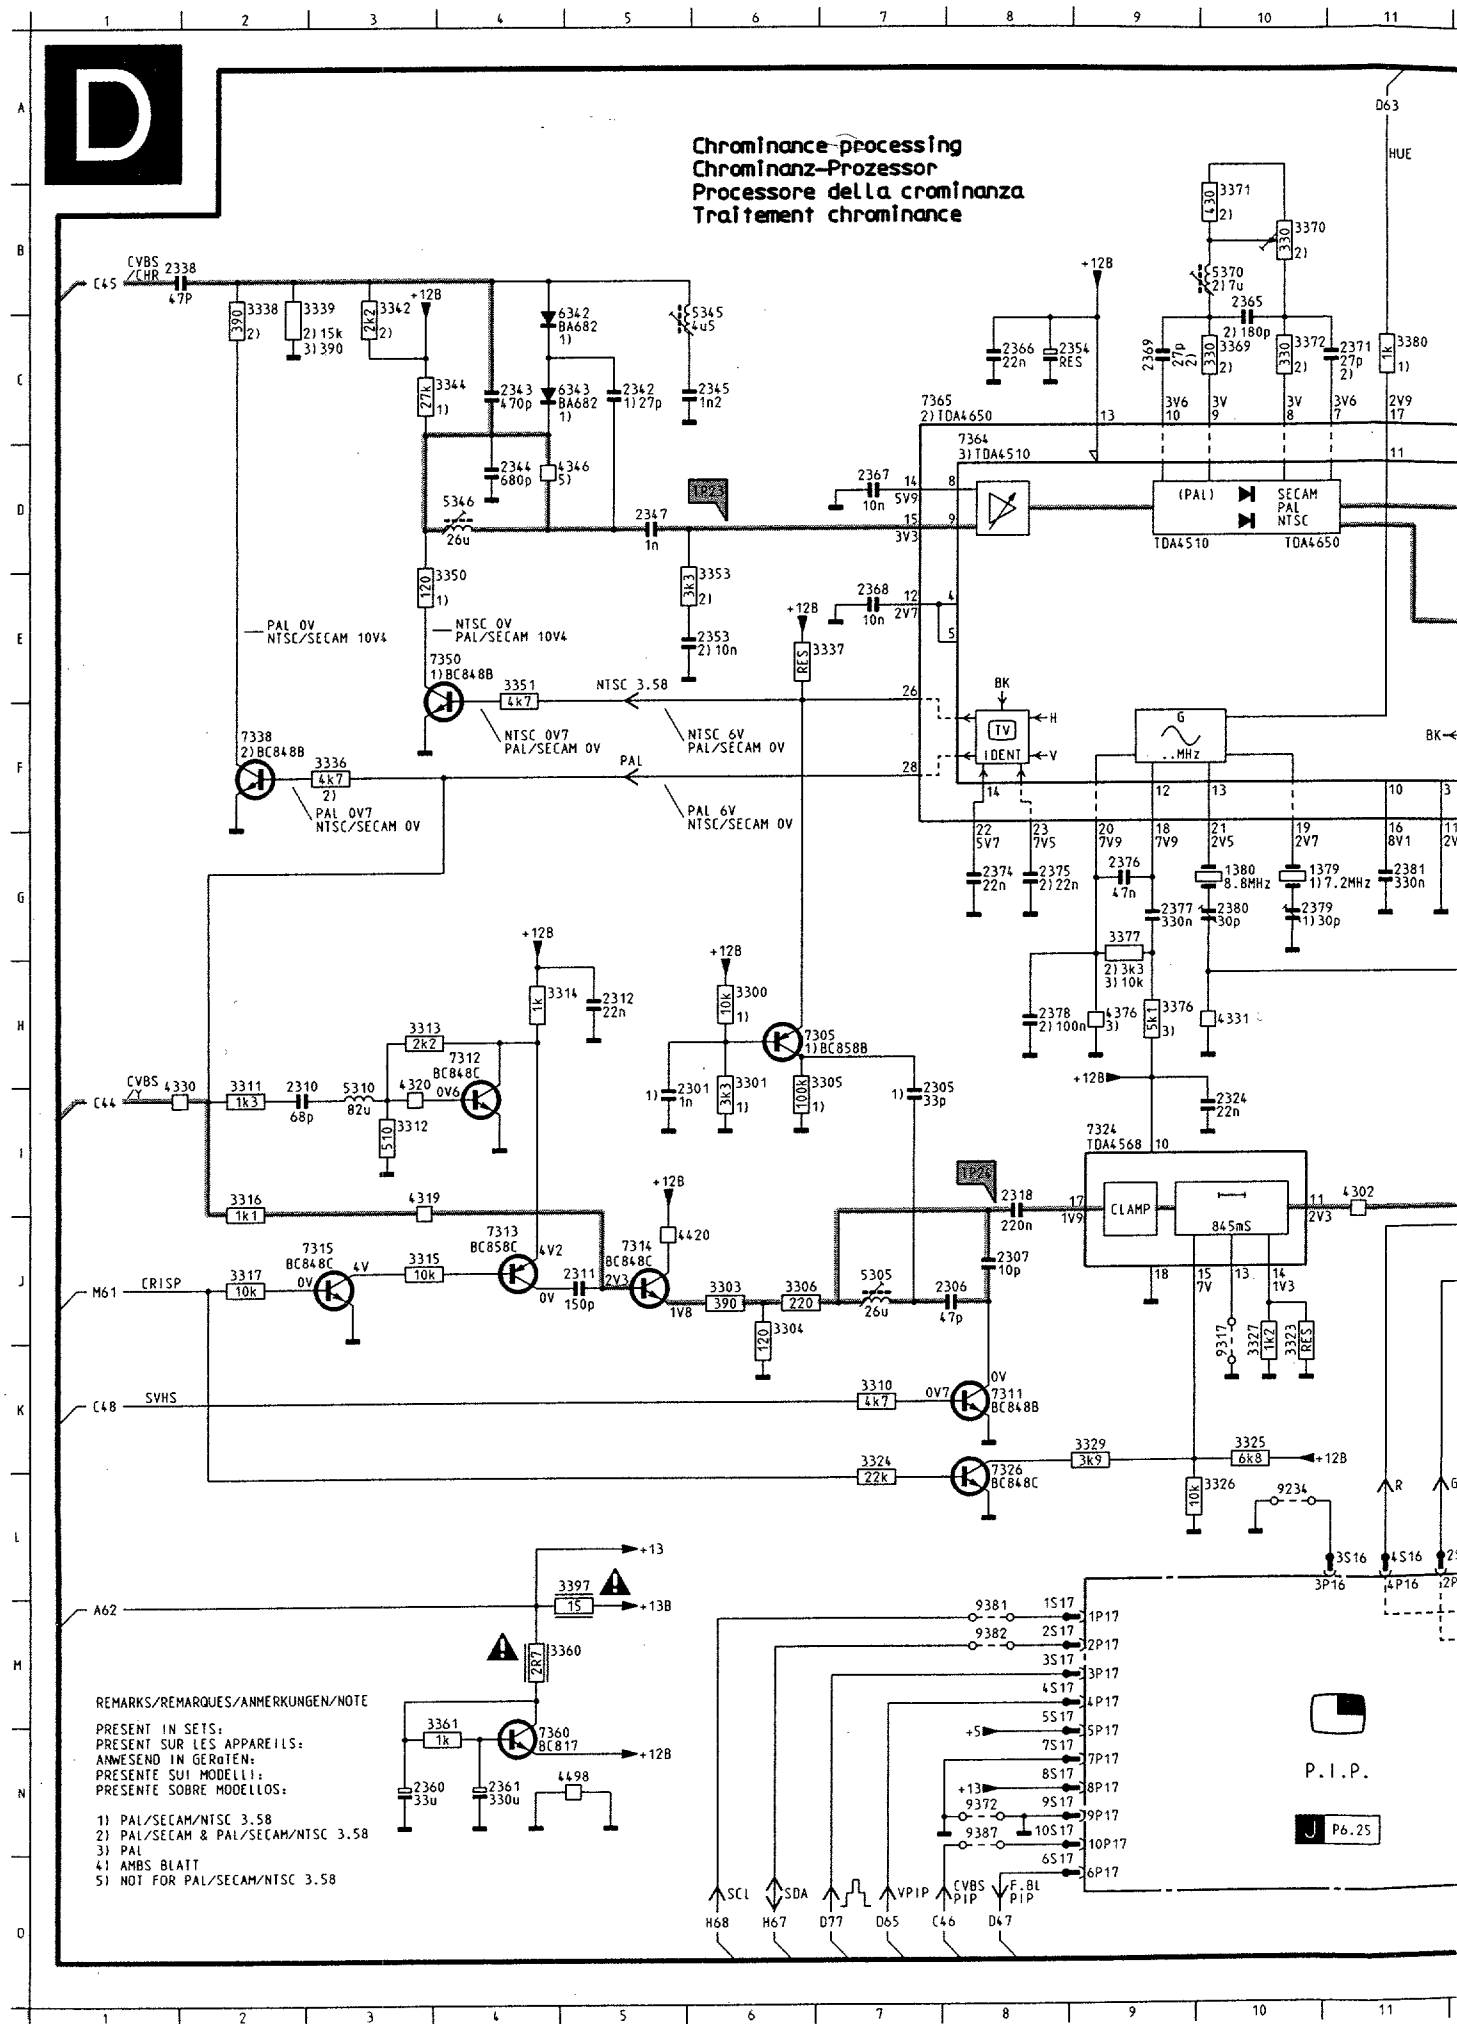


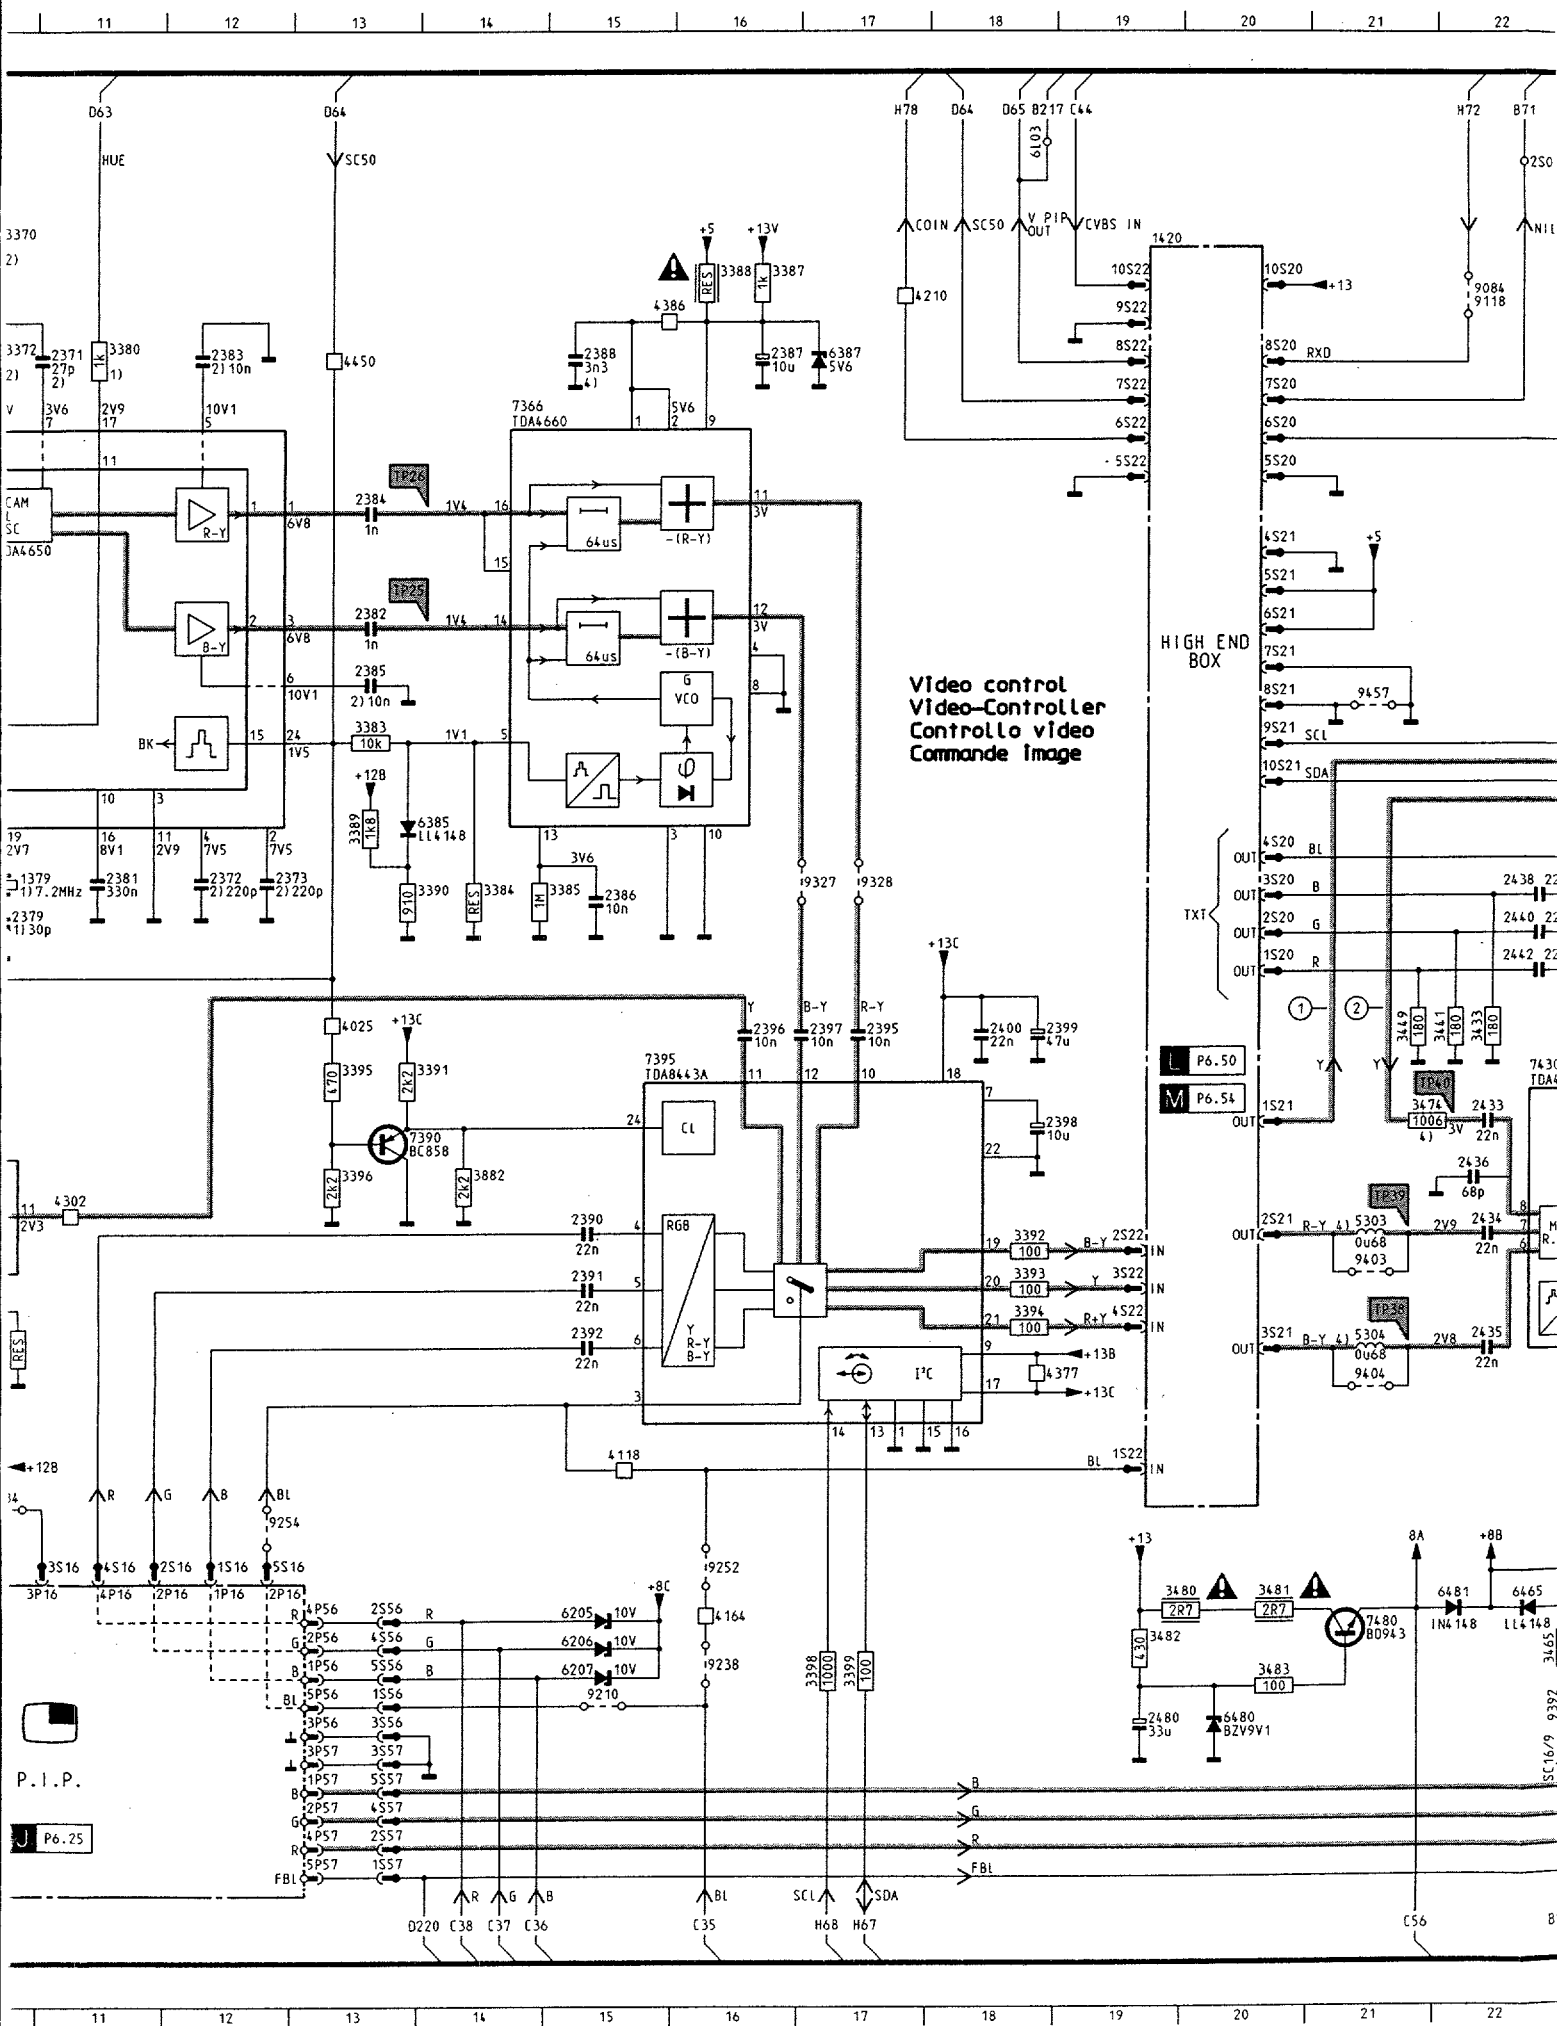


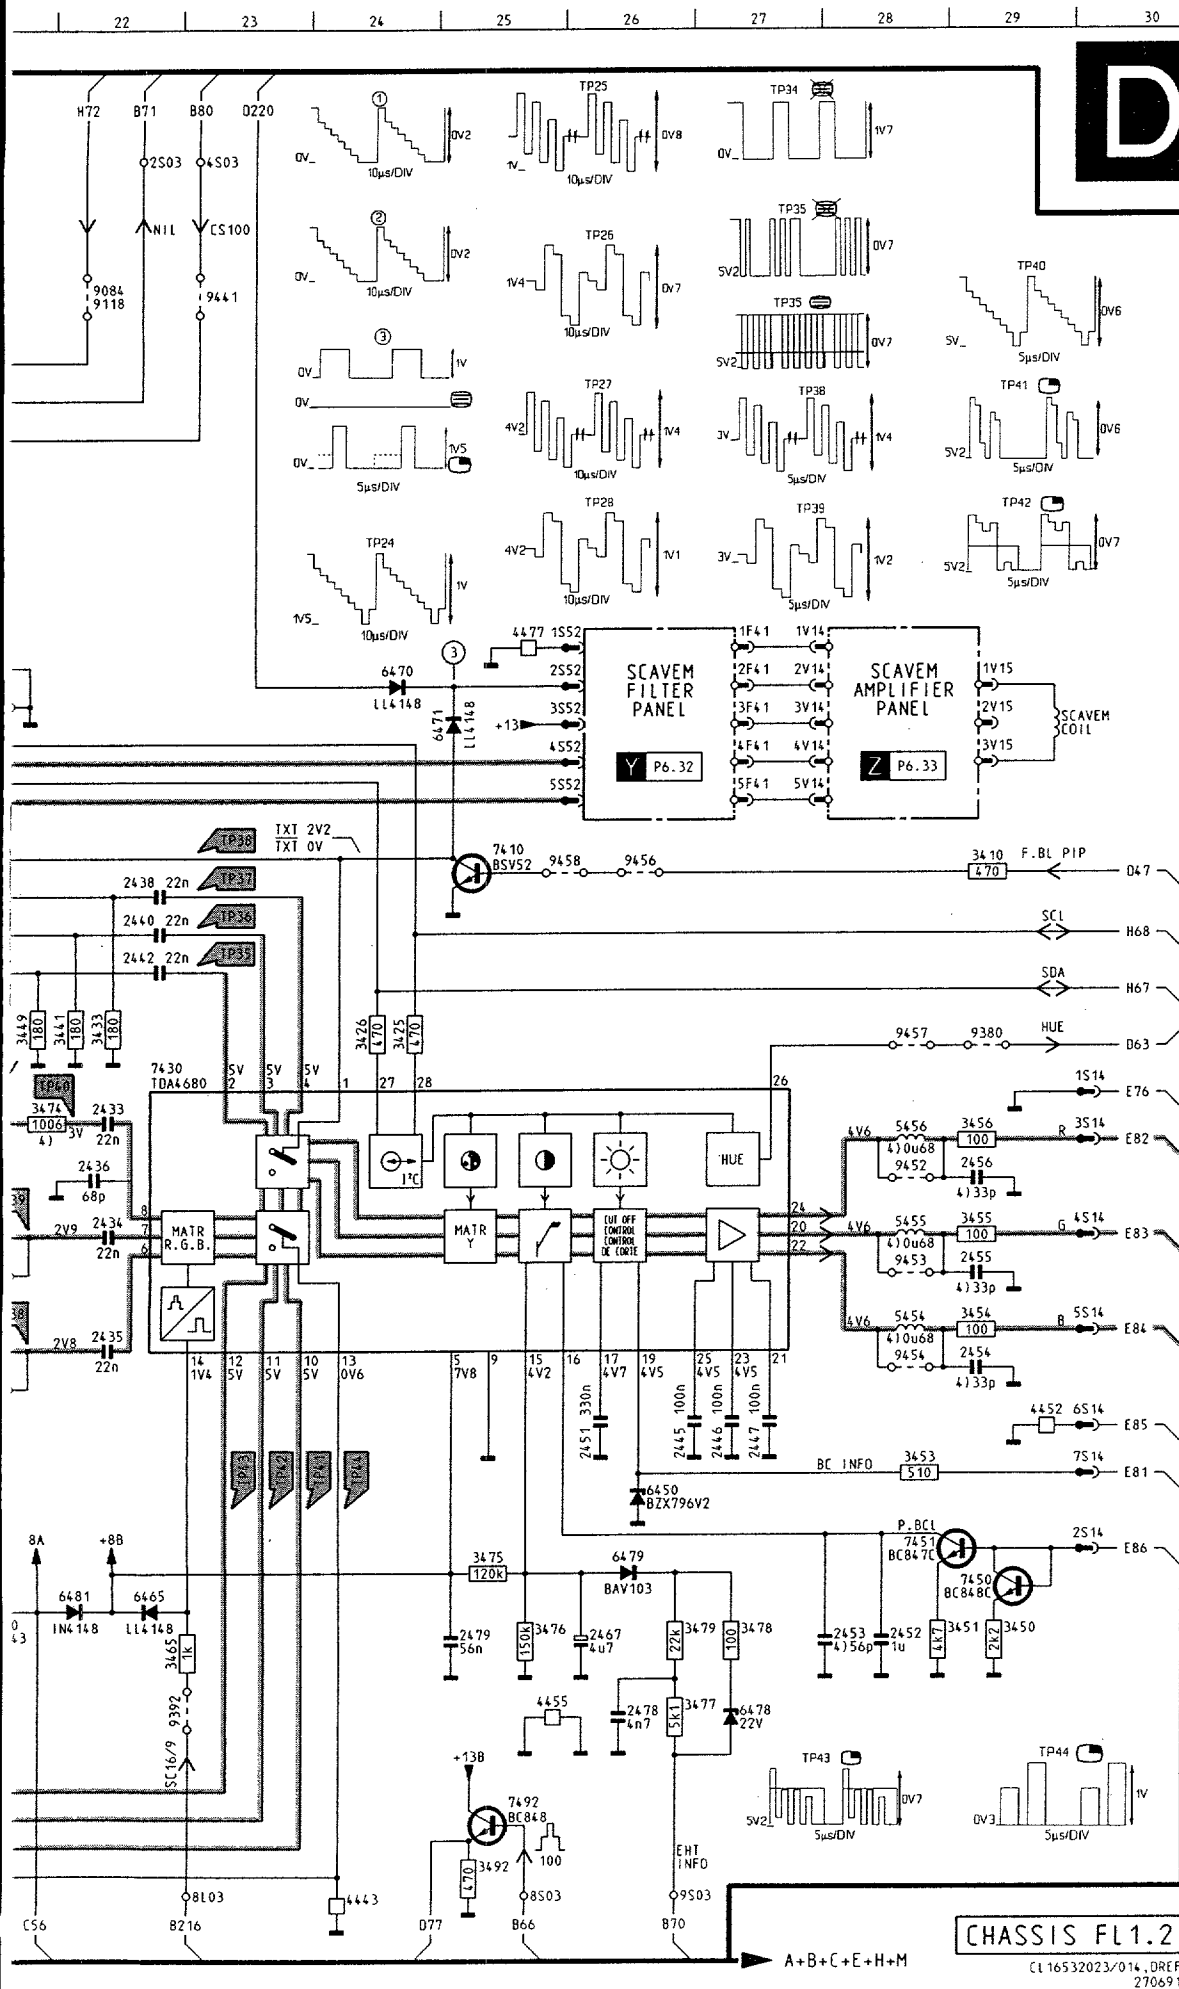

1379	G10	3388	B16	9381	M 8
1380	G10	3389	F13	9382	M 8
1420	B19	3390	G13	9387	M 8
2301	I 5	3391	H13	9392	M23
2305	I 7	3392	J18	9403	J21
2306	J 8	3393	J18	9404	K21
2307	J 8	3394	J18	9441	B23
2310	I 2	3395	H13	9452	I28
2311	J 5	3396	I13	9453	J28
2312	H 5	3397	L 5	9454	K28
2318	I 8	3398	M17	9456	G26
2324	I10	3399	M17	9457	H28
2328	B 1	3410	G29	9457	E21
2342	C 5	3425	H24	9458	G26
2343	C 4	3426	H24		
2344	D 4	3433	H22		
2345	C 6	3441	H22		
2347	D 5	3449	H21		
2353	E 6	3450	M29		
2354	C 8	3451	M29		
2360	N 3	3453	K28		
2361	N 4	3454	J29		
2365	B10	3455	J29		
2366	C 8	3456	I29		
2367	D 7	3465	M22		
2368	E 7	3474	I21		
2369	C 9	3475	L25		
2371	C11	3476	M25		
2372	G12	3477	M26		
2373	G12	3478	M27		
2374	G 8	3479	M26		
2375	G 8	3480	L20		
2376	G 9	3481	L20		
2377	G 9	3482	M19		
2378	H 8	3483	M20		
2379	G10	3492	O25		
2380	G10	3882	I14		
2381	G11	4025	H13		
2382	E13	4118	K15		
2383	C12	4164	M16		
2384	D13	4210	B17		
2385	E13	4302	I11		
2386	G15	4319	I 3		
2387	C16	4320	I 3		
2388	C15	4330	I 1		
2390	J15	4331	H10		
2391	J15	4346	D 4		
2392	J15	4376	H 9		
2395	H17	4377	K18		
2396	H16	4386	B15		
2397	H17	4420	J 5		
2398	I18	4443	O24		
2399	H18	4450	C13		
2400	H18	4452	K29		
2433	I22	4455	M25		
2434	J22	4477	E25		
2435	J22	4498	N 5		
2436	I22	5303	J21		
2438	G22	5304	K21		
2440	G22	5305	J 7		
2442	H22	5310	I 3		
2445	K27	5345	C 6		
2446	K27	5346	D 4		
2447	K27	5370	B10		
2451	K26	5454	J28		
2452	M28	5455	J28		
2453	M28	5456	I28		
2454	K29	6205	M15		
2455	J29	6206	M15		
2456	I29	6207	M15		
2467	M26	6342	C 4		
2478	M26	6343	C 4		
2479	M25	6385	F13		
2480	M19	6387	C17		
3300	H 6	6450	L26		
3301	H 6	6465	M22		
3303	J 6	6470	E24		
3304	J 6	6471	F25		
3305	H 6	6478	M27		
3306	J 6	6479	L26		
3310	K 7	6480	M20		
3311	I 2	6481	M22		
3312	I 3	7305	H 6		
3313	H 3	7311	K 8		
3314	H 4	7312	H 4		
3315	J 3	7313	J 4		
3316	I 2	7314	J 5		
3317	J 2	7315	J 3		
3323	K10	7324	I 9		
3324	K 7	7326	L 8		
3325	K10	7338	F 2		
3326	L10	7350	E 3		
3327	K10	7360	N 4		
3329	K 9	7364	D 8		
3336	F 3	7365	C 7		
3337	E 6	7366	C14		
3338	B 2	7390	I13		
3339	B 2	7395	H15		
3342	B 3	7410	G25		
3344	C 3	7430	H22		
3350	D 3	7450	L29		
3351	E 4	7451	L28		
3353	D 6	7480	M21		
3360	M 4	7492	N25		
3361	N 4	9084	B22		
3369	C10	9118	B22		
3370	B10	9210	M15		
3371	B10	9234	L10		
3372	C10	9238	M16		
3376	H 9	9252	L16		
3377	G 9	9254	L12		
3383	C11	9317	K10		
3383	F13	9327	G17		
3384	G14	9328	G17		
3385	G15	9372	N 8		
3387	B16	9380	H29		



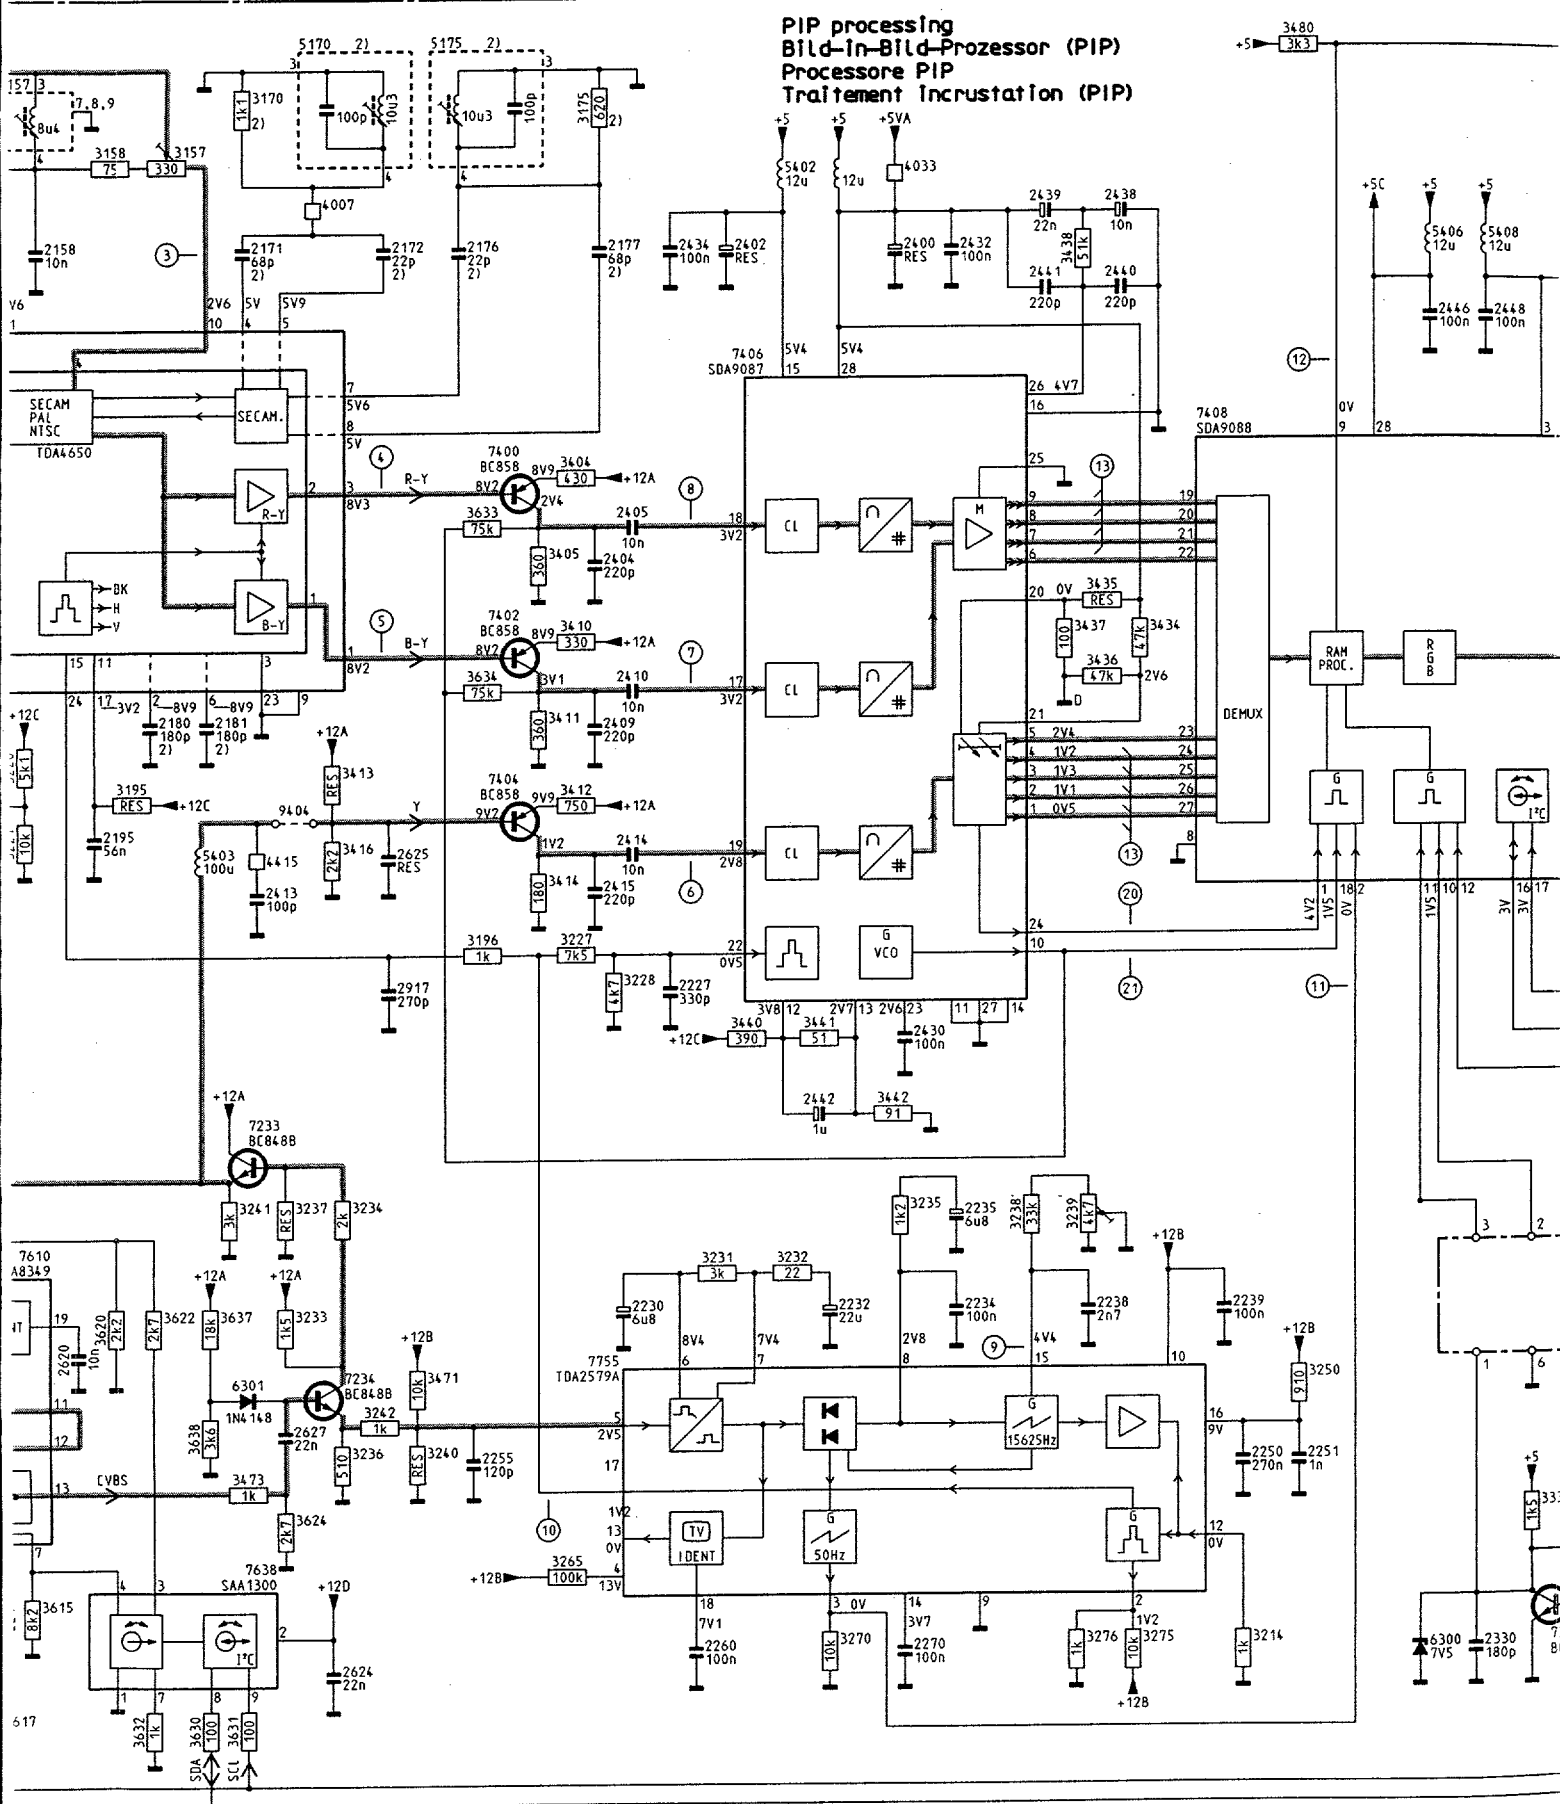

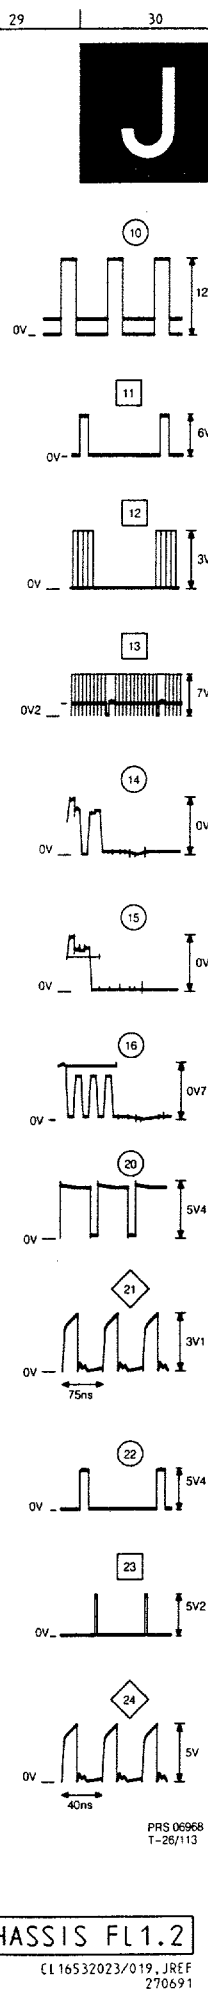

A	1155	A	9	3222	G10	5175	A14	
	1201	H	9	3227	H15	5190	G	
	1212	I	9	3228	H15	5402	B16	
	1600	J	2	3231	J16	5403	G12	
	1610	K	6	3232	J16	5406	C21	
	2103	D	4	3233	K13	5408	C22	
	2105	D	5	3234	J13	6300	M21	
	2118	D	6	3235	J17	6301	K12	
	2119	D	6	3236	L13	6461	B27	
	2120	D	6	3237	J13	6464	H25	
B	2125	C	9	3238	J18	6471	B	
	2155	B	8	3239	J19	7103	E	
	2158	C	11	3240	L14	7105	E	
	2160	C	7	3241	J12	7125	C	
	2161	C	7	3242	L13	7126	C	
	2162	C	8	3250	K21	7200	H	
	2171	C12	3265	M15	7210	I	B	
	2172	C13	3270	M17	7233	I12	B	
	2175	B	3	3275	M19	7234	K13	
	2176	C14	3276	M19	7235	N	9	
C	2177	C15	3330	M23	7330	M22		
	2180	F11	3331	L23	7335	C24		
	2181	F12	3332	L22	7337	C25		
	2185	F	8	3335	A24	7338	B25	
	2187	F	8	3336	B24	7350	H	
	2189	F	9	3337	C24	7400	D14	
	2195	G11	3338	A25	7402	E14		
	2201	H	7	3340	C25	7404	G14	
	2202	H	9	3341	F	2	7406	C16
	2211	I	7	3345	G	2	7408	D20
D	2212	I	9	3353	G	2	7470	A
	2220	G10	3354	H	2	7471	B	4
	2222	G10	3376	N25	7472	B	5	
	2227	H16	3377	N26	7473	B	5	
	2230	K15	3378	N27	7610	J11		
	2232	K17	3404	E15	7638	M12		
	2234	K18	3405	E15	7755	K15		
	2235	J18	3406	I23	9001	A	5	
	2238	K19	3407	123	9027	D24		
	2239	K20	3410	F15	9028	F24		
E	2250	L20	3411	F15	9029	D24		
	2251	L21	3412	G15	9030	B27		
	2255	L14	3413	G13	9033	L27		
	2260	M16	3414	G15	9034	N27		
	2270	M17	3416	G13	9035	N27		
	2230	M22	3434	E19	9036	M27		
	2340	F	2	3435	E19	9045	E	2
	2345	G	2	3436	F19	9045	G13	
	2350	I	2	3437	E19			
	2351	I	3	3438	C19			
F	2380	M27	3440	I16				
	2382	N27	3441	I17				
	2384	N27	3442	I17				
	2391	O25	3443	H23				
	2395	F25	3446	I23				
	2397	G25	3448	H23				
	2399	M24	3448	G24				
	2400	C17	3460	A27				
	2402	C16	3461	B26				
	2404	E15	3463	G25				
G	2405	E15	3465	B28				
	2409	F15	3470	D	2			
	2410	F15	3471	K14				
	2413	H12	3472	G24				
	2414	G15	3473	L12				
	2415	H15	3474	B	5			
	2430	I17	3475	B	5			
	2432	C18	3476	B	3			
	2434	C16	3480	A20				
	2438	B19	3600	M	3			
H	2439	B18	3601	N	3			
	2440	C19	3602	N	5			
	2441	C18	3603	N	5			
	2442	I17	3604	N	4			
	2445	B24	3605	M	2			
	2446	C22	3610	M	7			
	2447	I24	3611	M	6			
	2448	C22	3612	N	8			
	2470	C23	3613	N	7			
	2604	N	4	3614	N	6		
I	2614	N	5	3615	M11			
	2615	M	9	3616	M10			
	2616	M10	3617	N10				
	2618	K	7	3618	J	8		
	2619	K	6	3619	J	9		
	2620	K11	3620	K11				
	2621	N	3	3621	M	8		
	2622	N	2	3622	K12			
	2623	N	8	3624	L13			
	2624	N13	3625	M	6			
J	2625	G13	3626	M	6			
	2627	L13	3630	N12				
	2917	H13	3631	N12				
	3100	E	5	3632	N11			
	3103	C	5	3633	E14			
	3104	C	5	3634	F14			
	3105	C	5	3635	N10			
	3106	E	6	3636	M	6		
	3107	E	6	3637	K12			
	3108	E	6	3638	L12			
K	3155	A	8	3664	L24			
	3156	B	9	4003	J23			
	3157	B12	4005	H	8			
	3158	B11	4007	B13				
	3170	A12	4008	M23				
	3175	A15	4009	B	8			
	3195	G11	4033	B17				
	3196	H14	4047	G24				
	3200	H	7	4049	F24			
	3201	H	7	4402	K23			
L	3202	G	9	4415	G12			
	3211	I	7	4634	M	7		
	3212	I	9	5118	D	5		
	3214	M20	5155	A	8			
	3220	G10	5157	A10				
	3221	G10	5170	A13				

CHASSIS FL1.2

CL 16532023/019, JREF
270691





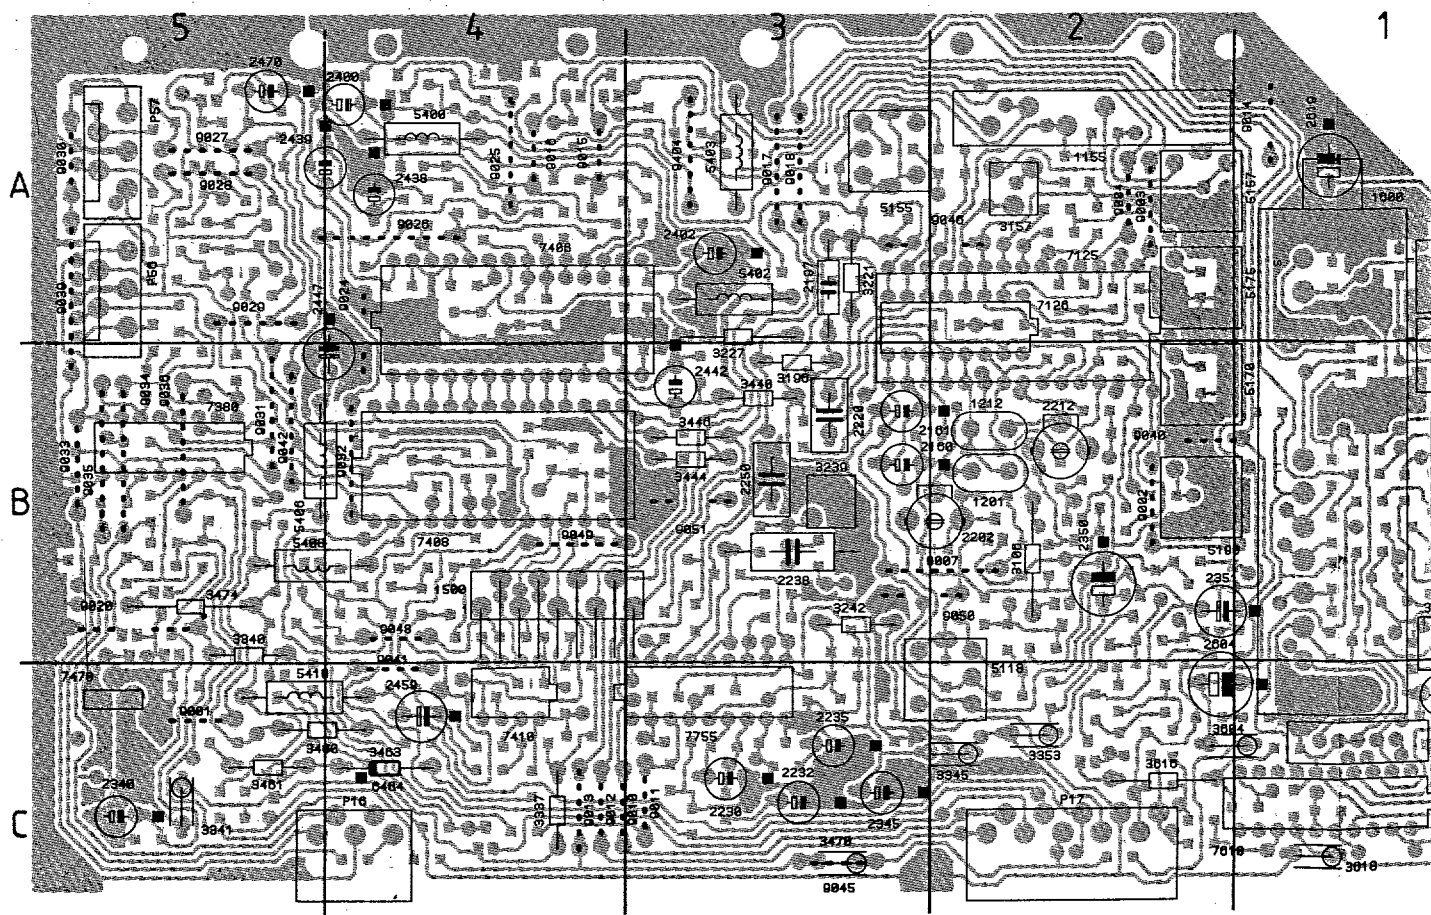


Image dans L'image

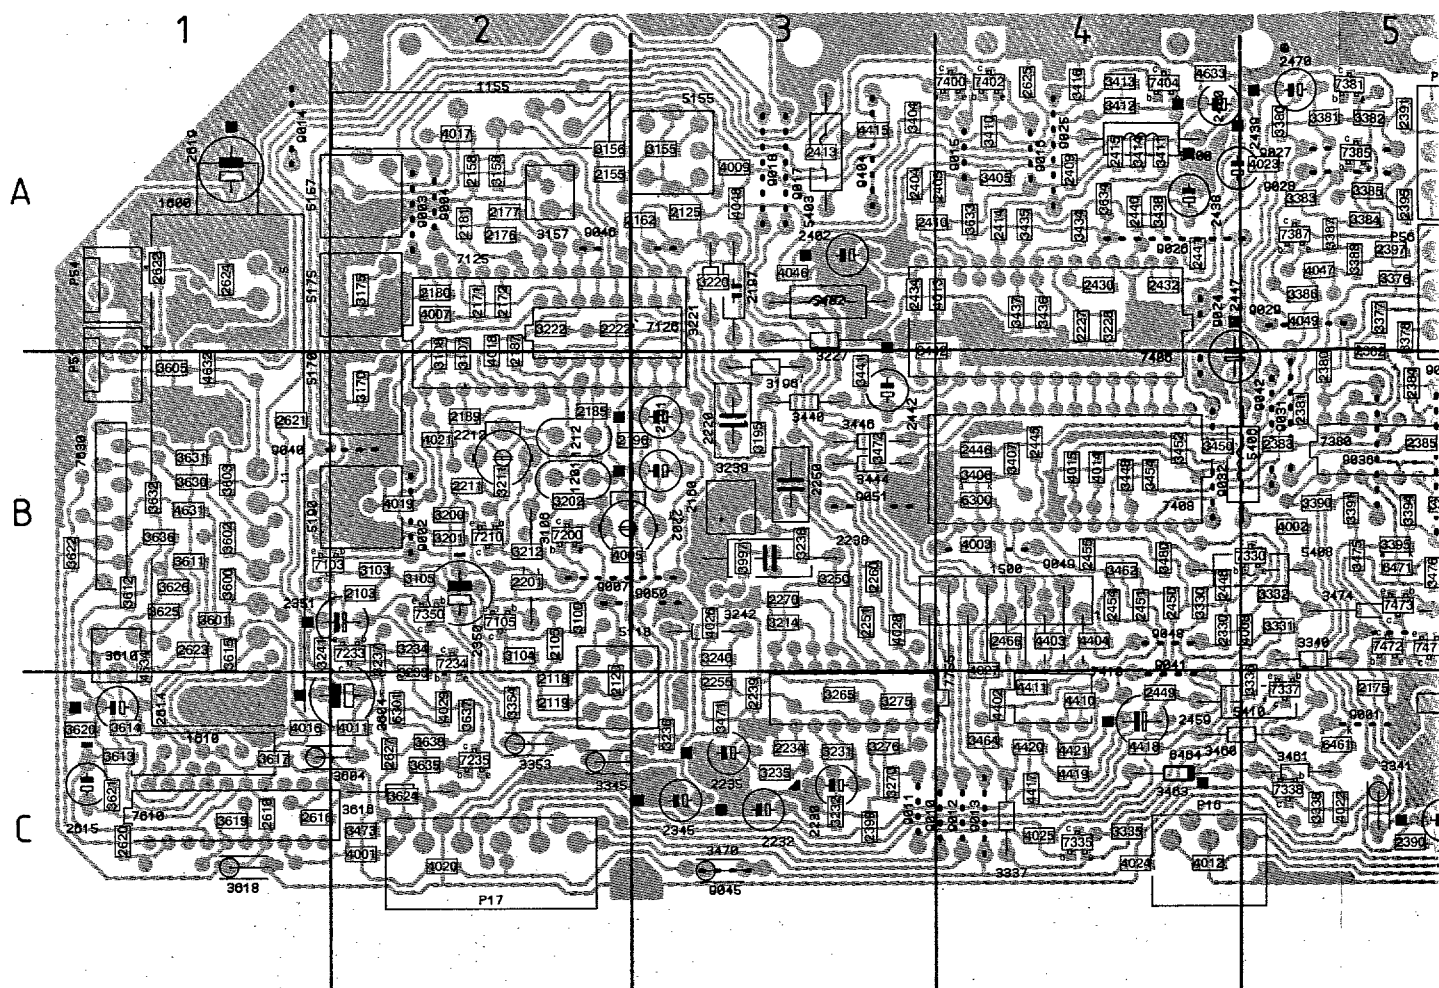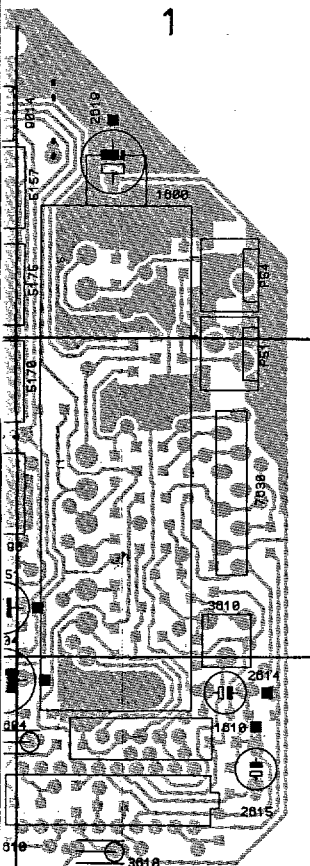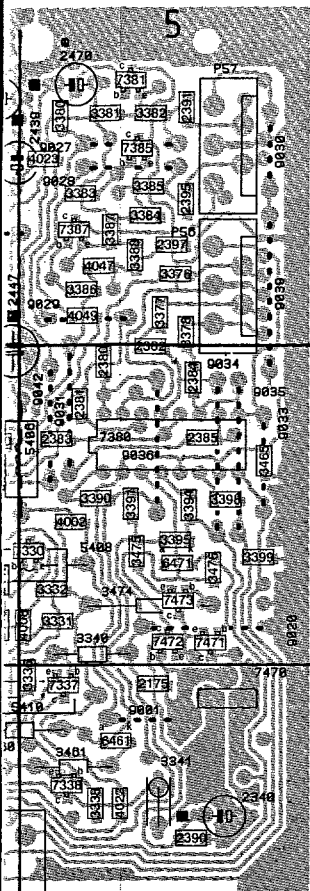



1155 A2	2430 A4	3250 B3	3475 B5	4418 C4	9020 B5
1201 B2	2432 A4	3265 C3	3476 B5	4419 C4	9024 A4
1212 B2	2434 A3	3270 C3	3480 B4	4420 C4	9025 A4
1500 B4	2438 A4	3275 C3	3600 B1	4421 C4	9026 A4
1600 A1	2439 A5	3278 C3	3601 B1	4631 B1	9027 A5
1610 C1	2440 A4	3330 B4	3602 B1	4632 B1	9028 A5
2103 B2	2441 A4	3331 B5	3603 B1	4633 A4	9029 A5
2105 B2	2442 B3	3332 B5	3604 C1	4634 B1	9030 A5
2118 C2	2445 B4	3335 C4	3605 B1	5118 B2	9031 B5
2119 C2	2446 B4	3336 C5	3610 B1	5155 A3	9032 B4
2120 C2	2447 A4	3337 C4	3611 B1	5157 A1	9033 B5
2125 A3	2448 B4	3338 C5	3612 B1	5170 B2	9034 B5
2155 A2	2449 C4	3340 B5	3613 C1	5175 A1	9035 B5
2158 A2	2450 B4	3341 C5	3614 C1	5190 B2	9036 B5
2160 B3	2451 B4	3345 C2	3615 B2	5400 A4	9039 A5
2161 B3	2454 B4	3353 C2	3616 C1	5402 A3	9040 B2
2162 A3	2455 B4	3354 C2	3617 C1	5403 A3	9041 C4
2171 A2	2459 C4	3376 A5	3618 C1	5406 B5	9042 B5
2172 A2	2466 B4	3377 A5	3619 C1	5408 B5	9045 C3
2175 C5	2470 A5	3378 A5	3620 C1	5410 C5	9046 A2
2176 A2	2604 C3	3380 A5	3621 C1	6300 B4	9048 B4
2177 A2	2614 C1	3381 A5	3622 B1	6301 C2	9049 B4
2180 A2	2615 C1	3382 A5	3624 C2	6461 C5	9050 B3
2181 A2	2616 C1	3383 A5	3625 B1	6464 C4	9051 B3
2185 B2	2618 C1	3384 A5	3626 B1	6471 B5	9404 A3
2189 B2	2619 A1	3385 A5	3630 B1	7103 B2	P016 C4
2196 B2	2620 C1	3386 A5	3631 B1	7105 B2	P017 C2
2197 A3	2621 B1	3387 A5	3633 A4	7125 A2	P051 B1
2201 B2	2622 A1	3388 A5	3634 A4	7126 A3	P054 A1
2202 B3	2623 B2	3390 B5	3635 C2	7200 B2	P056 A5
2211 B2	2625 A4	3391 B5	3636 B1	7210 B2	P057 A5
2212 B2	2627 C2	3394 B5	3637 C2	7233 B2	
2220 B3	3100 B2	3395 B5	3638 C2	7234 B2	
2222 A2	3103 B2	3398 B5	3997 B3	7235 C2	
2227 A4	3104 B2	3399 B5	4001 C2	7330 B5	
2230 C3	3105 B2	3404 A3	4002 B5	7335 C4	
2232 C3	3106 B2	3405 A4	4003 B4	7337 C5	
2234 C3	3107 A2	3406 B4	4005 B3	7338 C5	
2235 C3	3108 A2	3407 B4	4007 A2	7350 B2	
2238 B3	3155 A3	3410 A4	4008 B5	7380 B5	
2239 E3	3156 A2	3411 A4	4009 A3	7381 A5	
2250 B3	3157 A2	3412 A4	4011 C2	7385 A5	
2251 B3	3158 A2	3413 A4	4012 C4	7387 A5	
2255 C3	3170 B2	3414 A4	4013 A4	7400 A4	
2260 B3	3175 A2	3416 A4	4014 B4	7402 A4	
2270 B3	3195 B3	3434 A4	4015 B4	7404 A4	
2330 B4	3196 B3	3435 A4	4016 C1	7406 A4	
2340 C5	3200 B2	3436 A4	4017 A2	7408 B4	
2345 C3	3201 B2	3437 A4	4018 A2	7410 C4	
2350 B2	3202 B2	3438 A4	4019 B2	7470 C5	
2351 B2	3211 B2	3440 B3	4020 C2	7471 B5	
2380 B5	3212 B2	3441 B3	4021 B2	7472 B5	
2381 B5	3214 B3	3442 A3	4022 C5	7473 B5	
2383 B5	3220 A3	3444 B3	4024 C4	7610 C1	
2384 B5	3221 A3	3446 B3	4025 C4	7630 B1	
2385 B5	3222 A2	3448 B4	4026 B3	7755 C3	
2390 C5	3227 A3	3450 B4	4027 B4	9001 C5	
2391 A5	3228 A4	3452 B4	4028 B3	9002 B2	
2395 A5	3231 C3	3454 B4	4029 C2	9003 A2	
2397 A5	3232 C3	3460 C5	4046 A3	9004 A2	
2399 C3	3233 C2	3461 C5	4047 A5	9007 B2	
2400 A4	3234 B2	3462 B4	4048 A3	9010 C3	
2402 A3	3235 C3	3463 C4	4049 A5	9011 C3	
2404 A3	3236 C3	3464 C4	4402 C4	9012 C4	
2405 A4	3237 B2	3465 B5	4403 B4	9013 C4	
2409 A4	3238 B3	3470 C3	4404 B4	9014 A1	
2410 A4	3239 B3	3471 C3	4410 C4	9015 A4	
2413 A3	3240 B3	3472 B3	4411 C4	9016 A4	
2414 A4	3241 B1	3473 C2	4415 A3	9017 A3	
2415 A4	3242 B3	3474 B5	4417 C4	9018 A3	

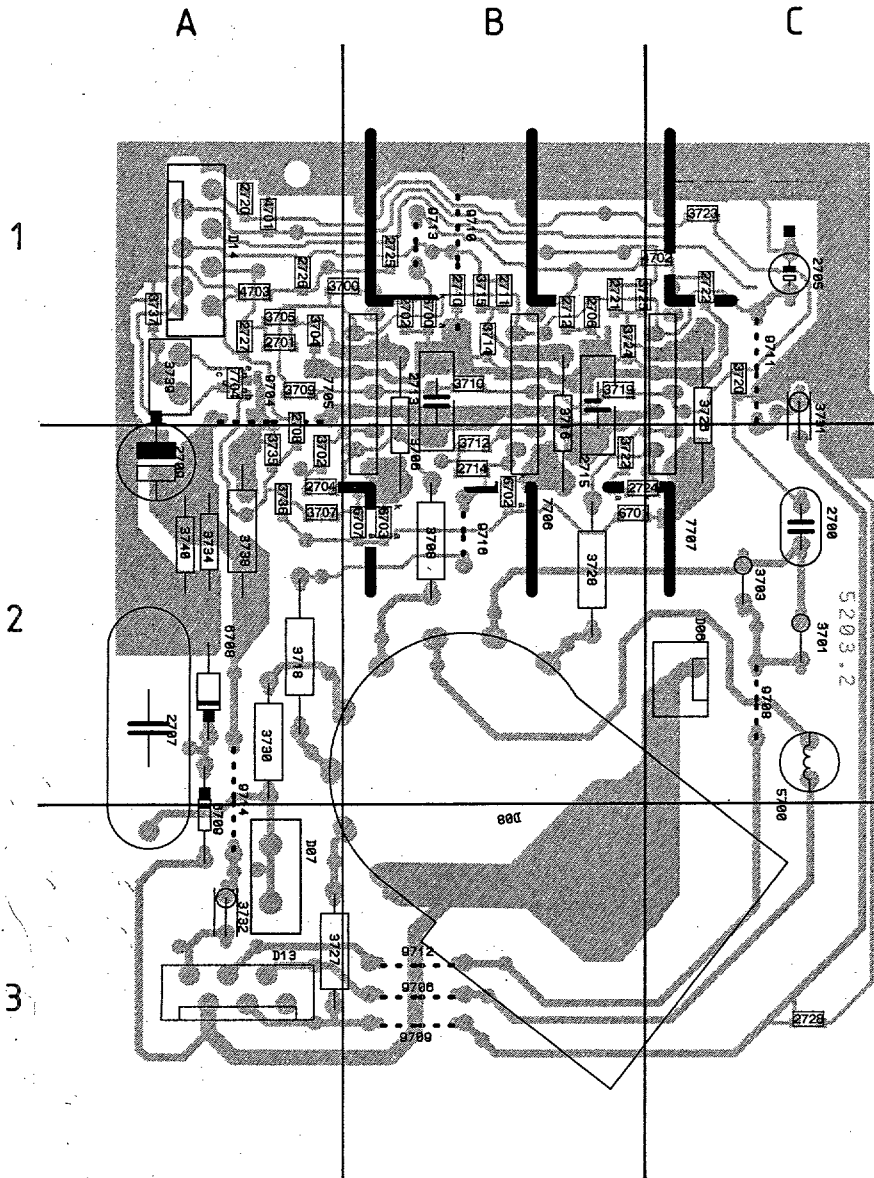

2700 C2
2701 A1
2702 B1
2704 A2
2705 C1
2706 B1
2707 A2
2708 A2
2709 A2
2710 A1
2711 B1
2712 B1
2713 B1
2714 B2
2715 B2
2720 A1
2721 B1
2722 C1
2724 B2
2725 B1
2726 A1
2727 A1
2728 C3
3700 A2
3701 C2
3702 A2
3703 C2
3704 A1
3705 A1
3706 B2
3707 A2
3708 B2
3709 A1
3710 B1
3712 B2
3714 B1
3715 B1
3716 B1
3718 A2
3719 B1
3720 C1
3722 B2
3723 C1
3724 B1
3725 B1
3726 C1
3727 A3
3728 B2
3730 A2
3731 C1
3732 A3
3734 A2
3735 A2
3736 A2
3737 A1
3738 A2
3739 A1
3740 A2
4701 A1
4702 C1
4703 A1
5700 C2
5700 A1
5701 B2
5702 B2
5703 B2
5707 B2
5708 A2
5709 A3
7704 A1


7705 A1
7706 B2
7707 C1
9704 A1
9706 B3
9708 C2
9709 B3
9710 B1
9711 C1
9712 B3
9713 B1
9714 A2
9716 B2
D06 C2
D07 A3
D08 B3
D13 A3
D14 A1

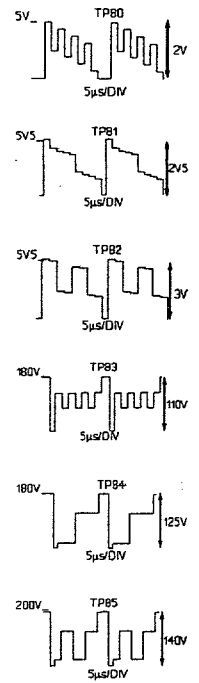

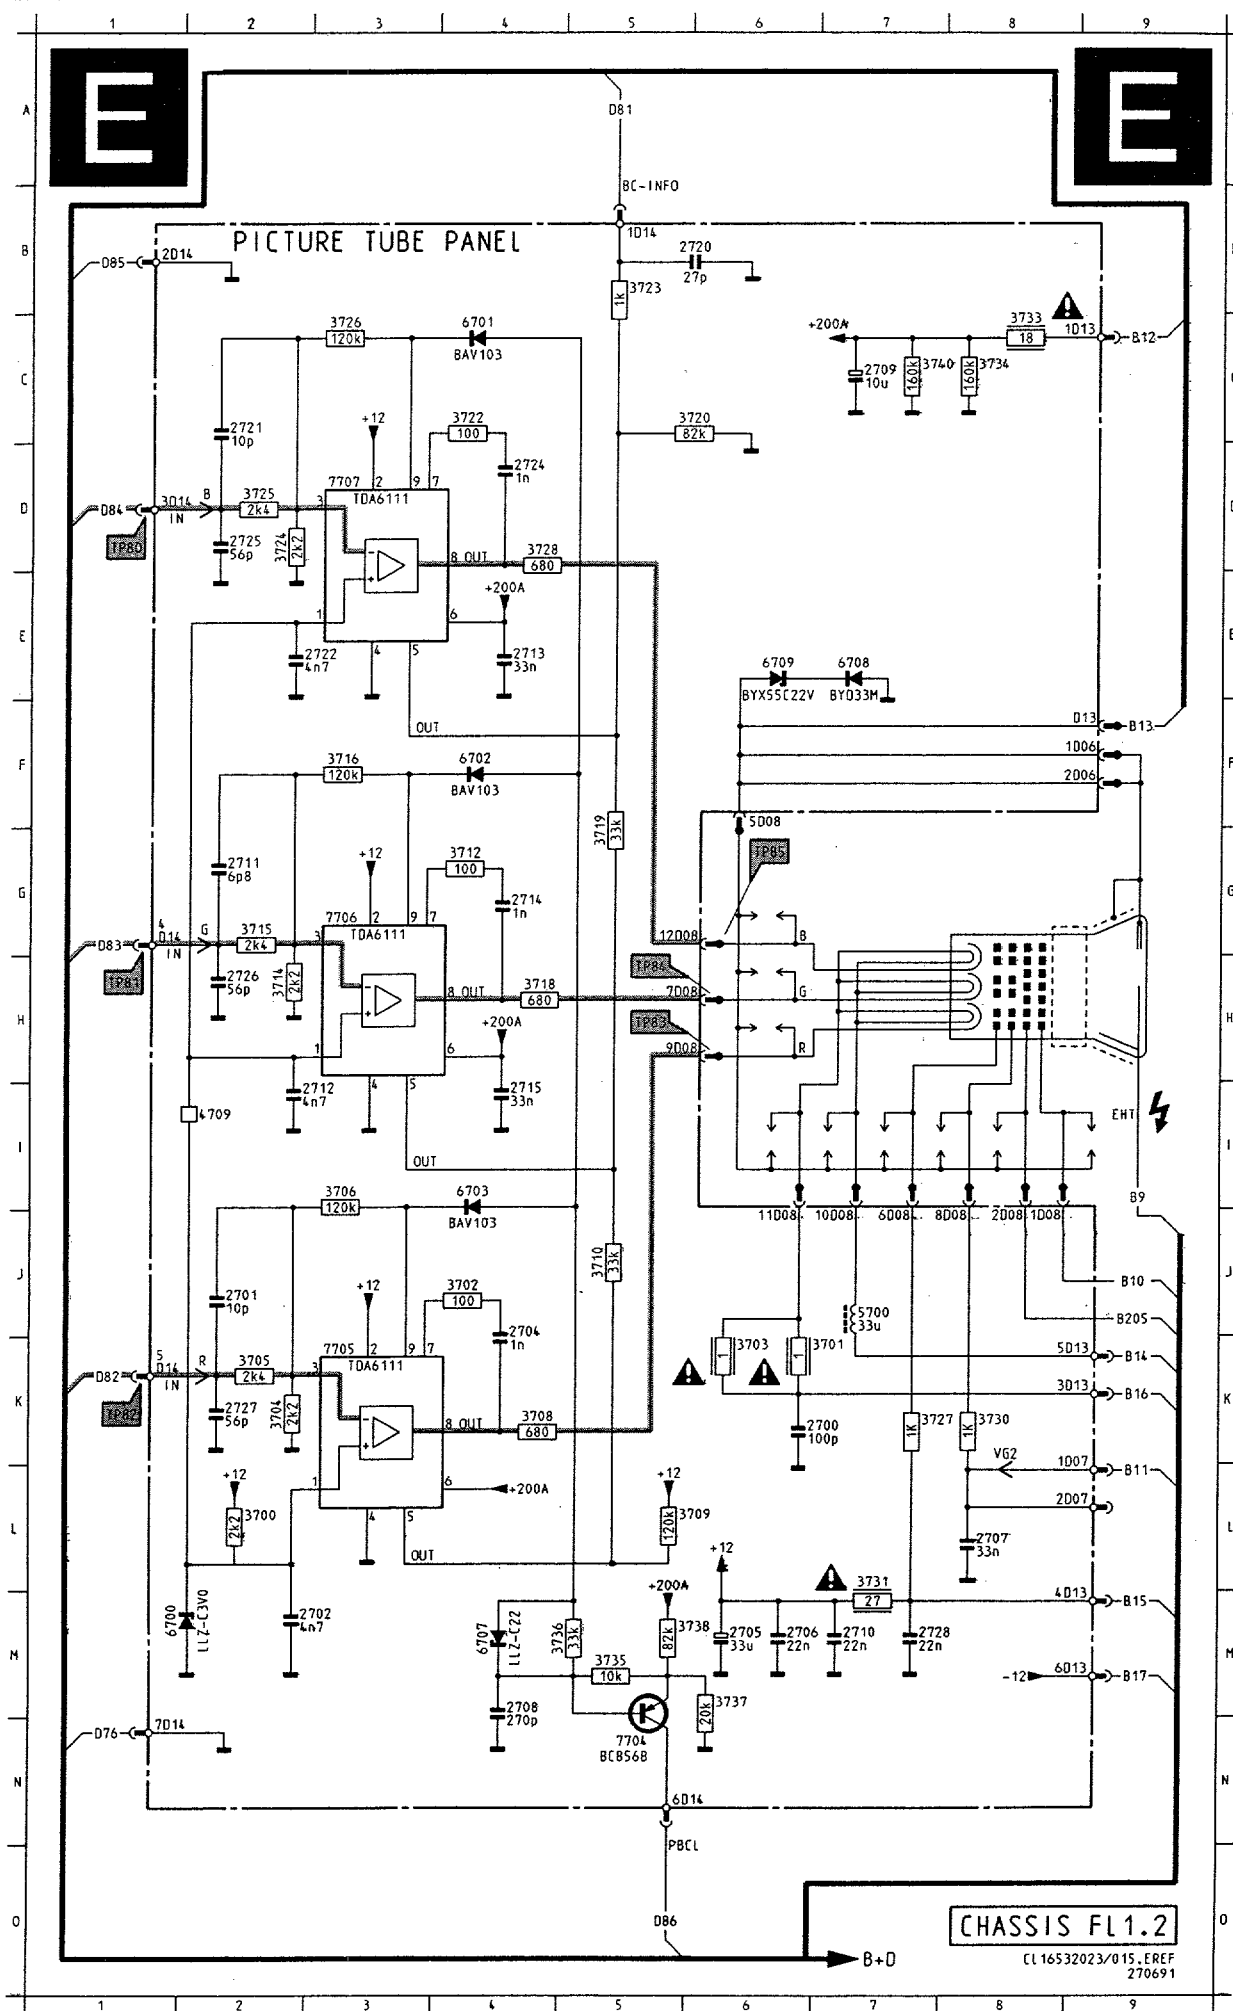


2700	K 6
2701	J 2
2702	M 2
2704	K 4
2705	M 6
2706	M 6
2707	L 8
2708	M 4
2709	C 7
2710	M 7
2711	G 2
2712	I 2
2713	E 4
2714	G 4
2715	I 4
2720	B 5
2721	C 2
2722	E 2
2724	D 4
2725	D 2
2726	H 2
2727	K 2
2728	M 7
3700	L 2
3701	K 6
3702	J 4
3703	K 6
3704	K 2
3705	K 2
3706	I 3
3708	K 4
3709	L 5
3710	J 5
3712	G 4
3714	H 2
3715	G 2
3716	F 3
3718	H 4
3719	G 5
3720	C 5
3722	C 4
3723	B 5
3724	D 2
3726	C 3
3727	K 7
3728	D 4
3730	K 8
3731	L 7
3733	C 8
3734	C 8
3735	M 5
3736	M 5
3737	M 6
3738	M 5
3740	C 7
4709	I 2
5700	J 7
6700	M 1
6701	C 4
6702	F 4
6703	I 4
6707	M 4
6708	E 7
6709	E 6
7704	N 5
7705	K 3
7706	G 3
7707	D 3


CHASSIS FL1.2
CL16532023/015.ERE
270691


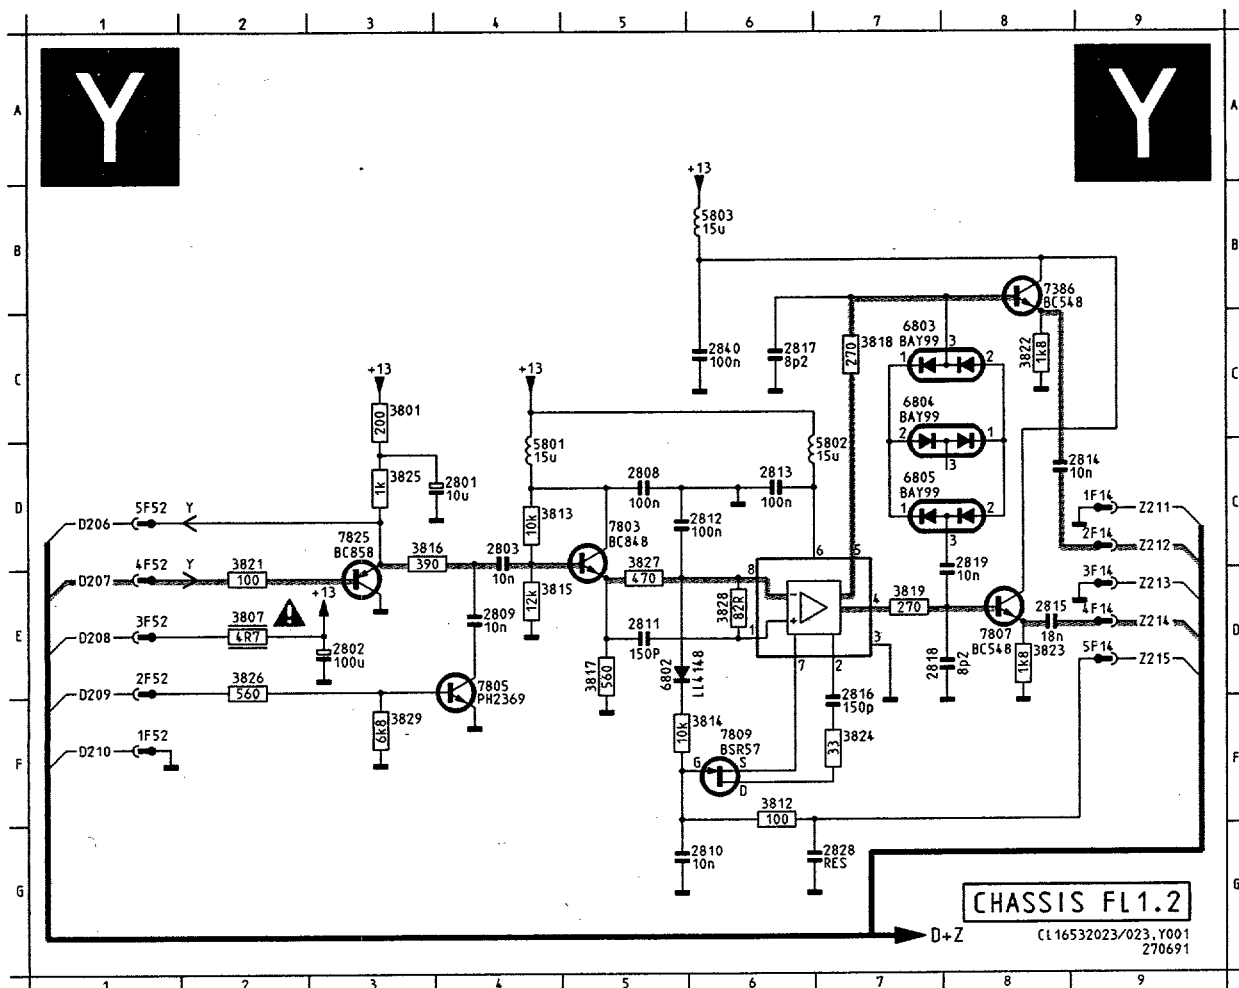


SCAVEM filter panel

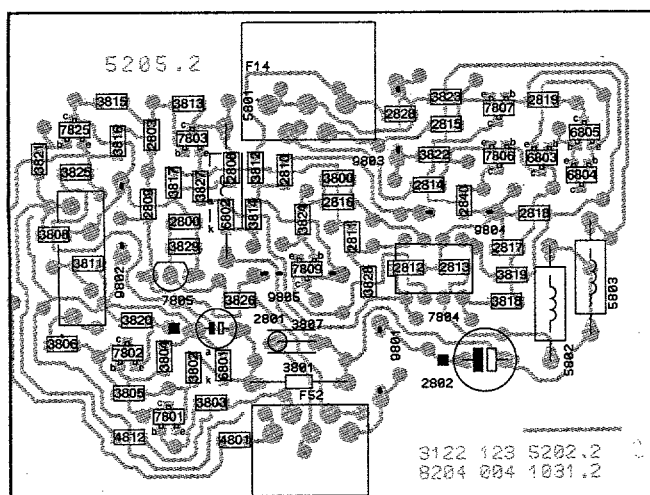


SCAVEM filter panel

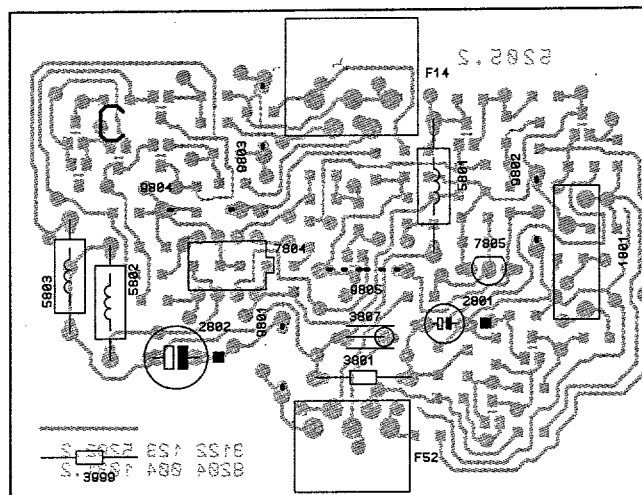


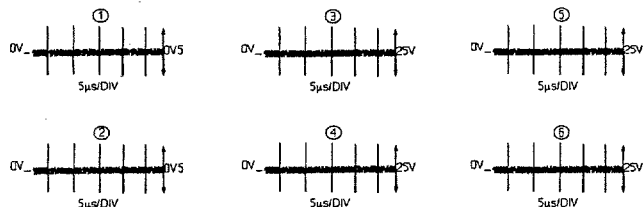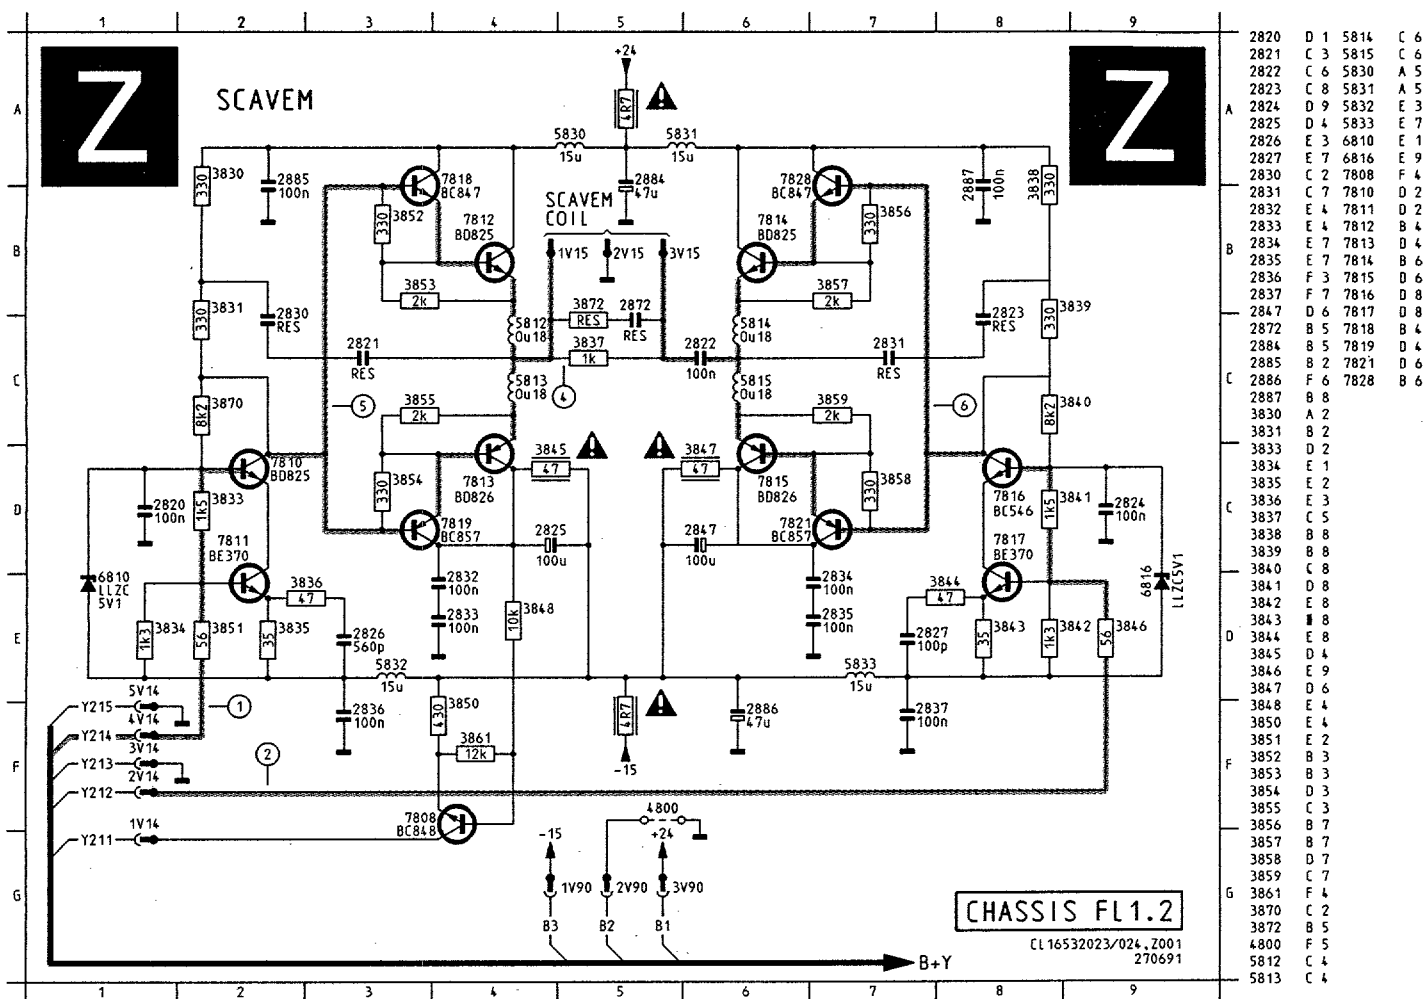



SCAVEM amplifier

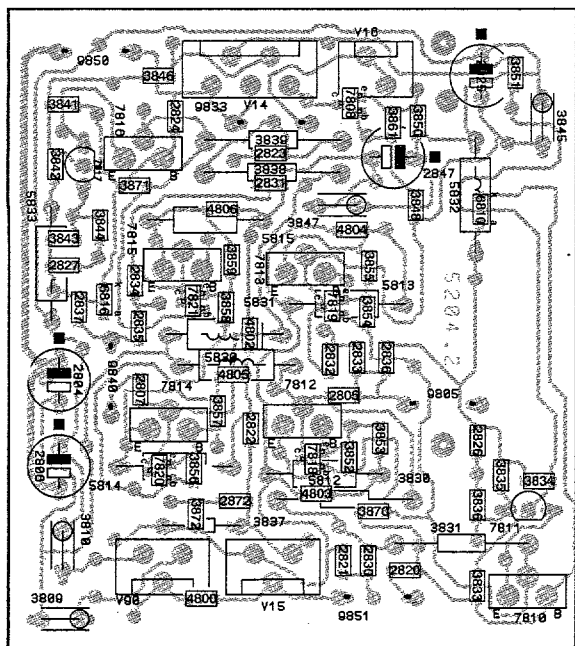




SCAVEM amplifier

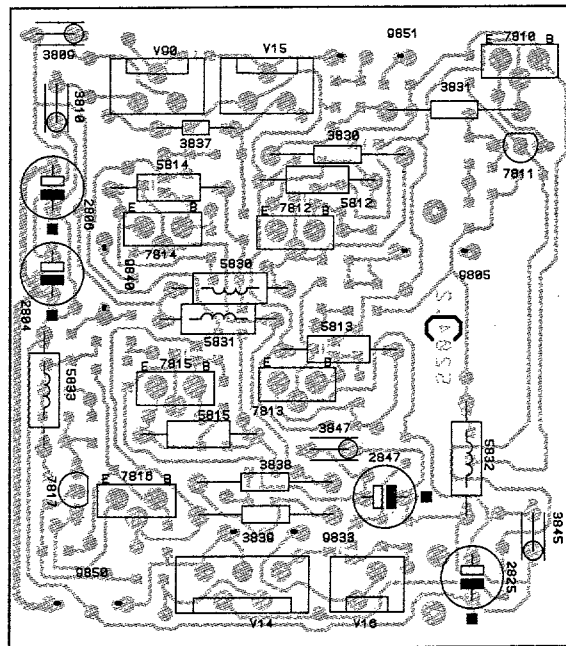

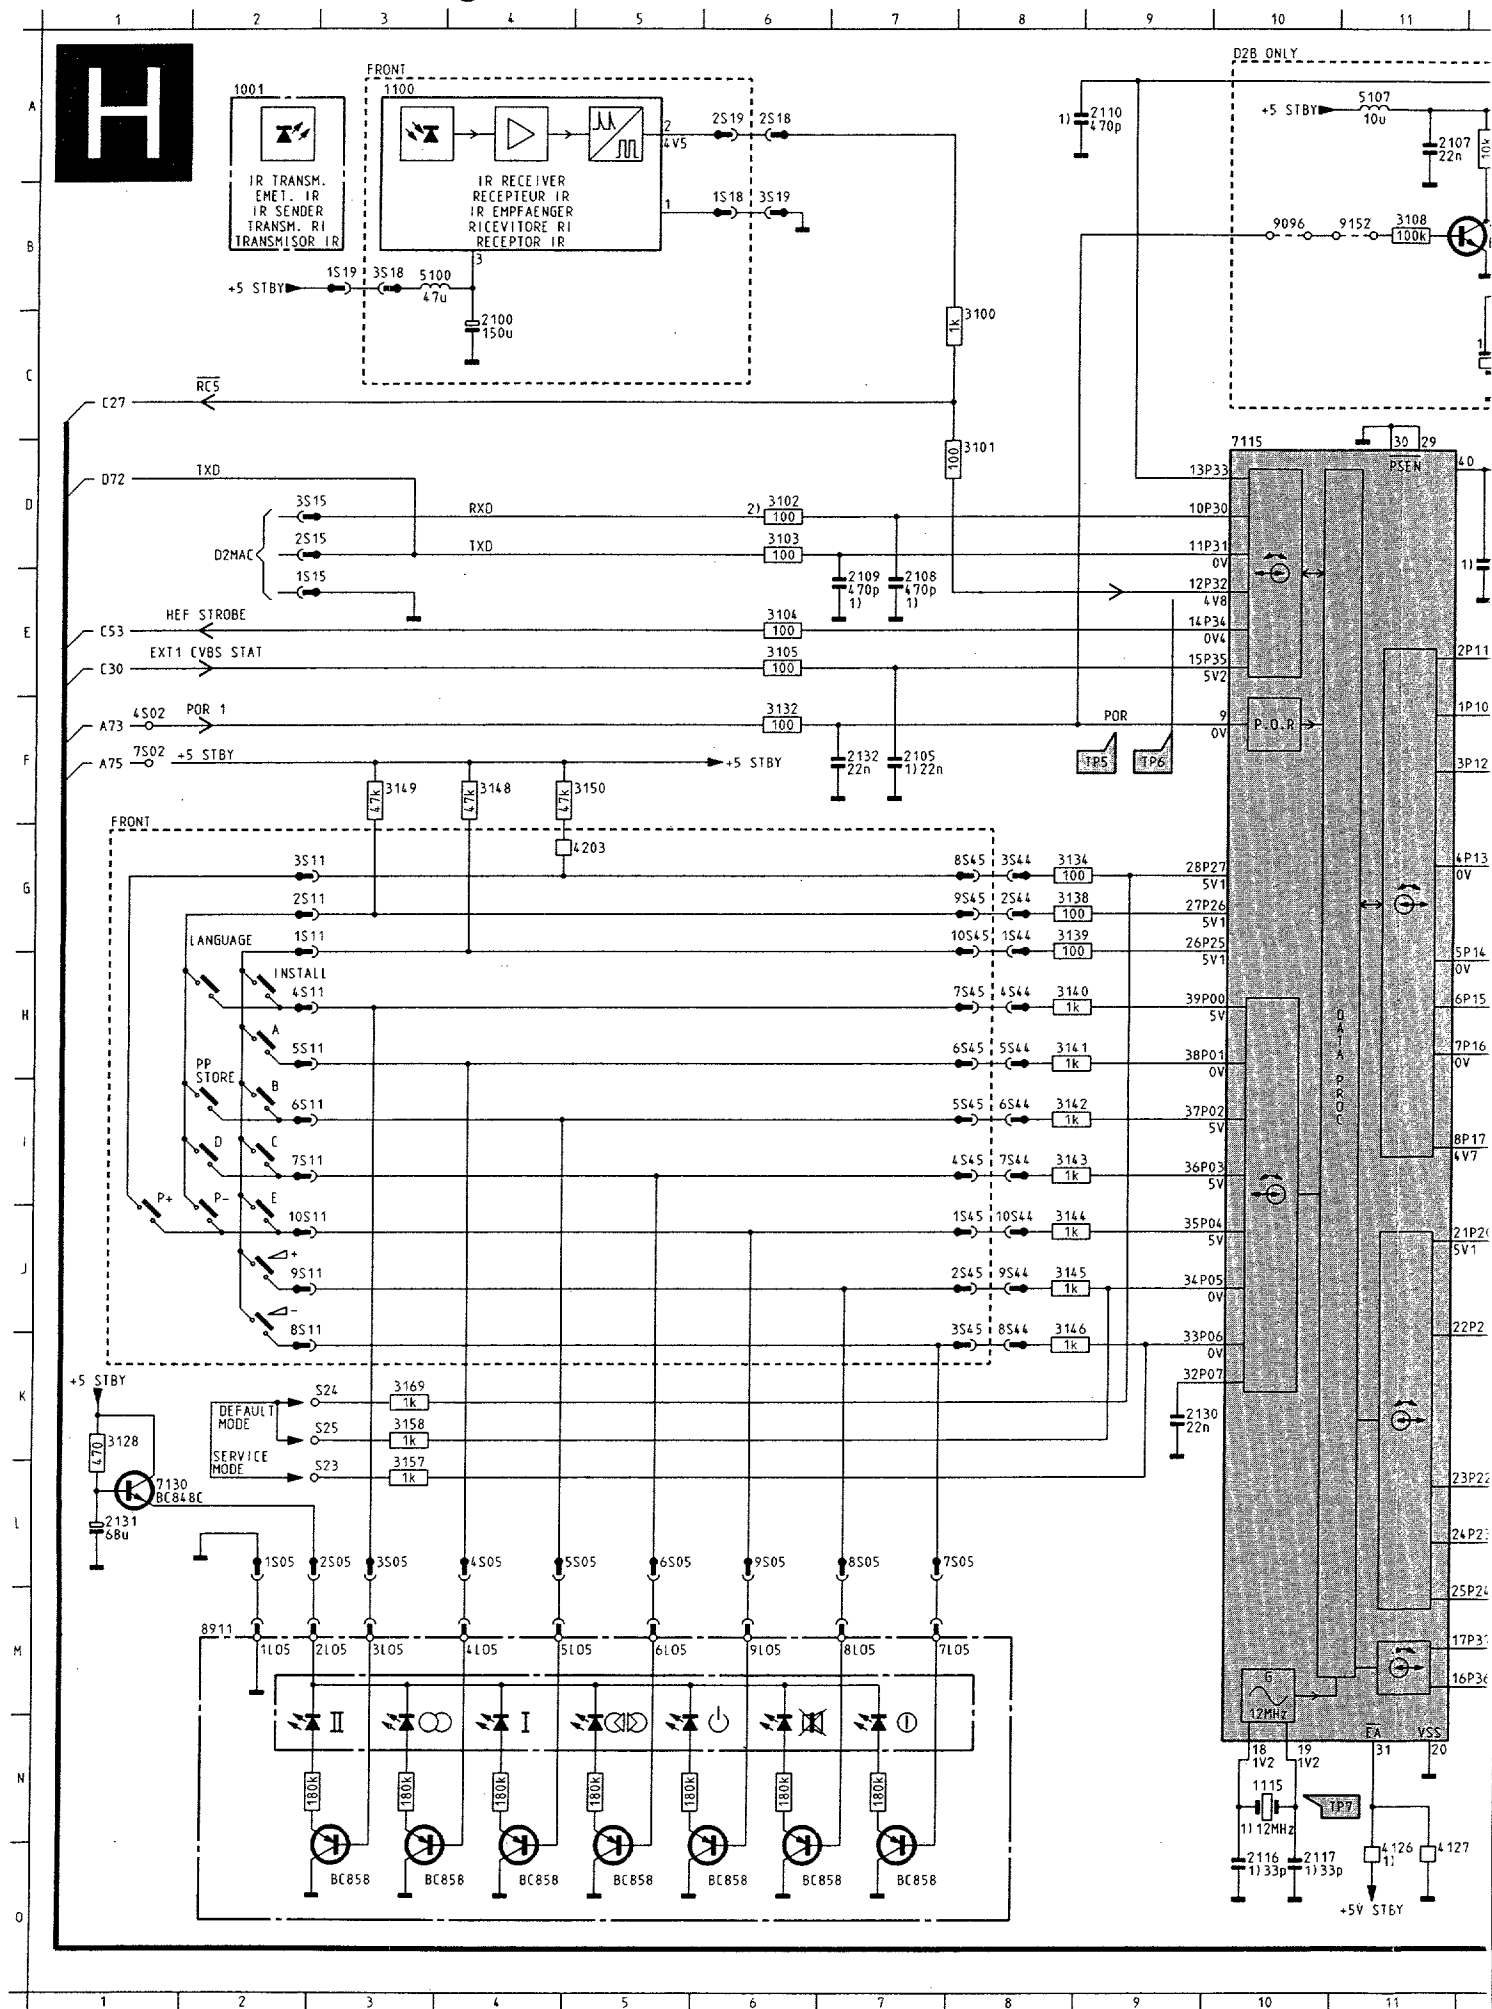


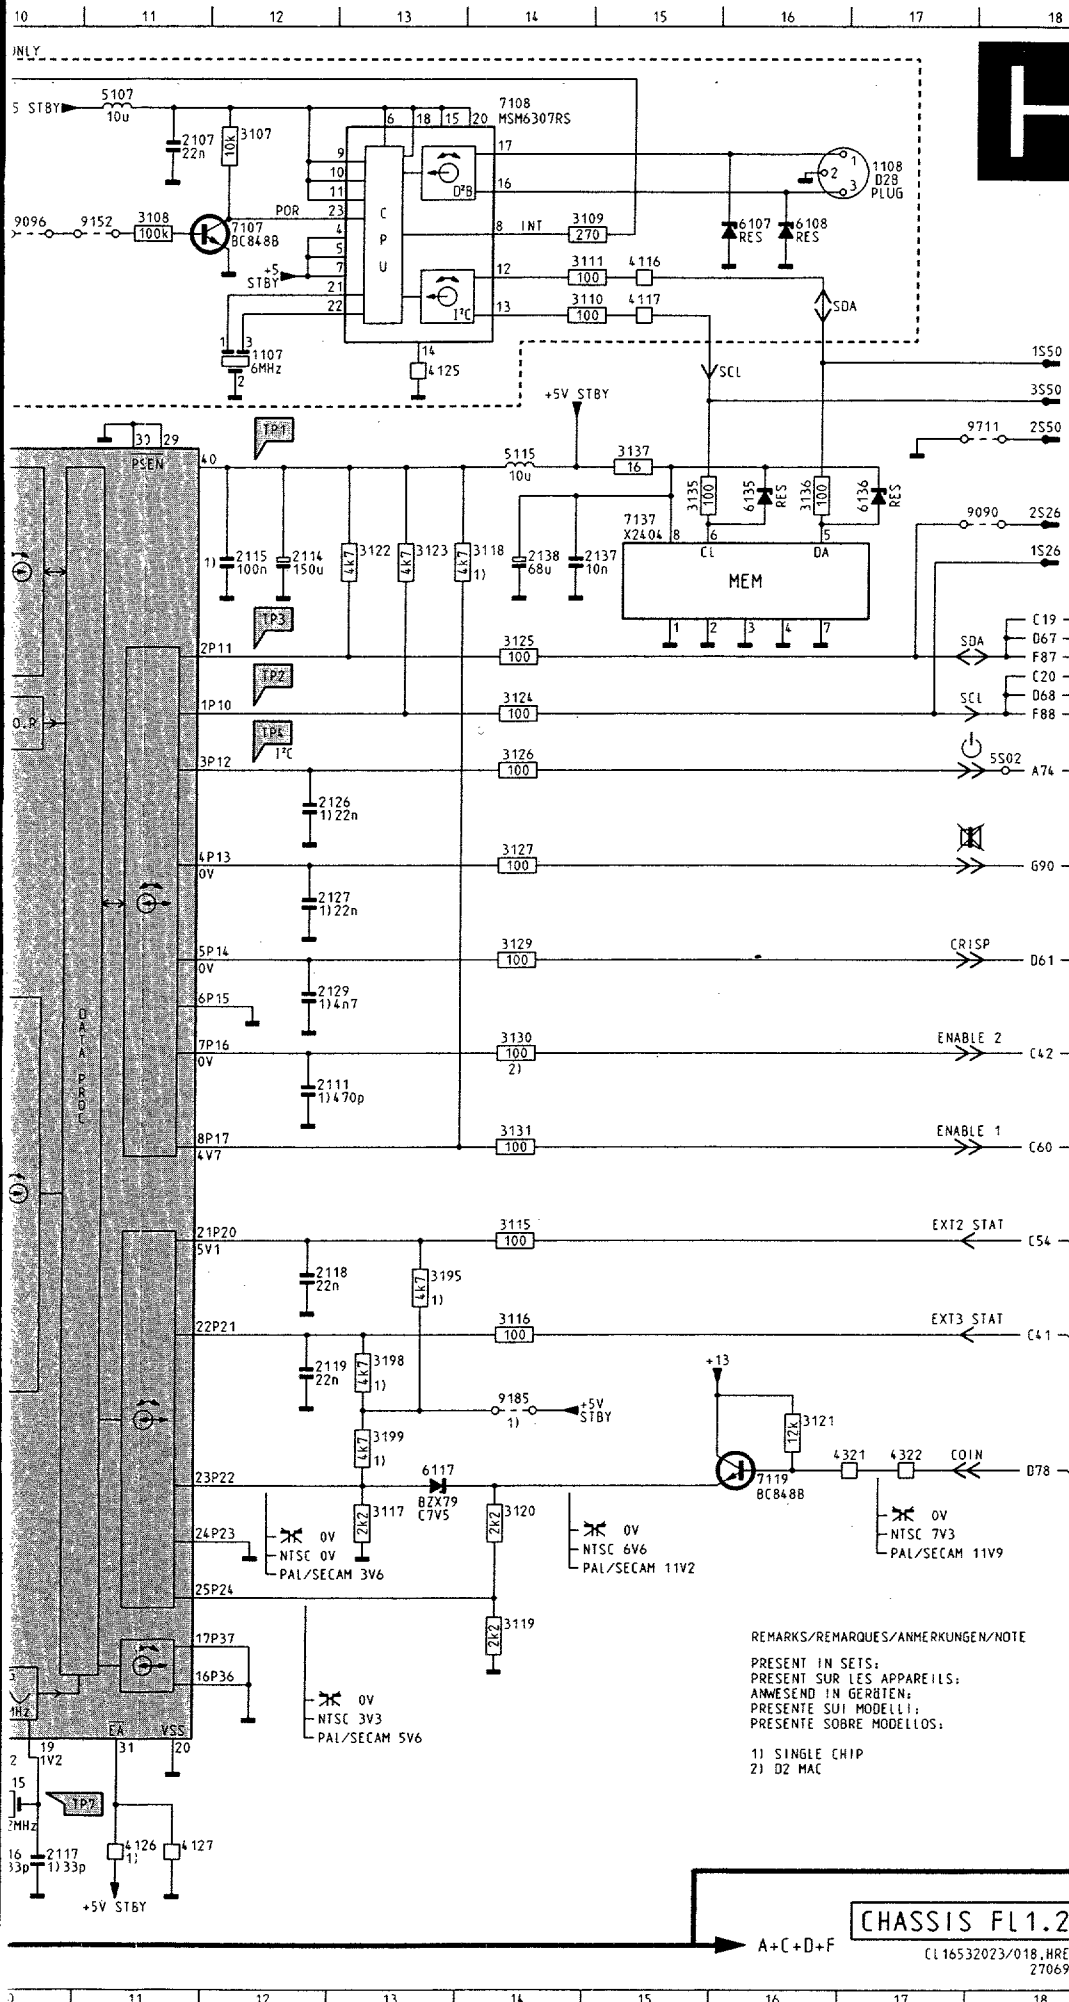


1001 A 2
1100 A 3
1107 C12
1108 A17
1115 N10
2100 C 4
2105 F 7
2107 A11
2108 E 7
2109 E 7
2110 A 9
2111 I12
2114 D12
2115 D12
2116 O10
2117 O10
2118 J12
2119 K12
2126 F12
2127 G12
2129 H12
2130 K 9
2131 L 1
2132 F 7
2137 D14
2138 D14
3100 B 8
3101 D 8
3102 D 6
3103 D 6
3104 E 6
3105 E 6
3107 A12
3108 B11
3109 B14
3110 B14
3111 B14
3115 J14
3116 J14
3117 L13
3118 D14
3119 H14
3120 L14
3121 K16
3122 D13
3123 D13
3124 F14
3125 E14
3126 F14
3127 G14
3128 K 1
3129 H14
3130 H14
3131 I14
3132 F 6
3134 G 8
3135 D15
3136 D16
3137 D15
3138 G 8
3139 G 8
3140 H 8
3141 H 8
3142 I 8
3143 I 8
3144 J 8
3145 J 8
3146 K 8
3148 F 4
3149 F 3
3150 F 5
3157 L 3
3158 K 3
3159 K 3
3195 J13
3198 K13
3199 K13
4116 B15
4117 B15
4125 C13
4126 O11
4127 O11
4203 G 5
4321 L17
4322 L17
5100 B 3
5107 A11
5115 D14
6107 B16
6108 B16
6117 L13
6135 D16
6136 D17
7107 B12
7108 A14
7119 L16
7130 L 1
7137 D15
8911 M 2
9090 D18
9096 B10
9152 B11
9185 K14
9711 C18




Control Panel
4822 212 23791

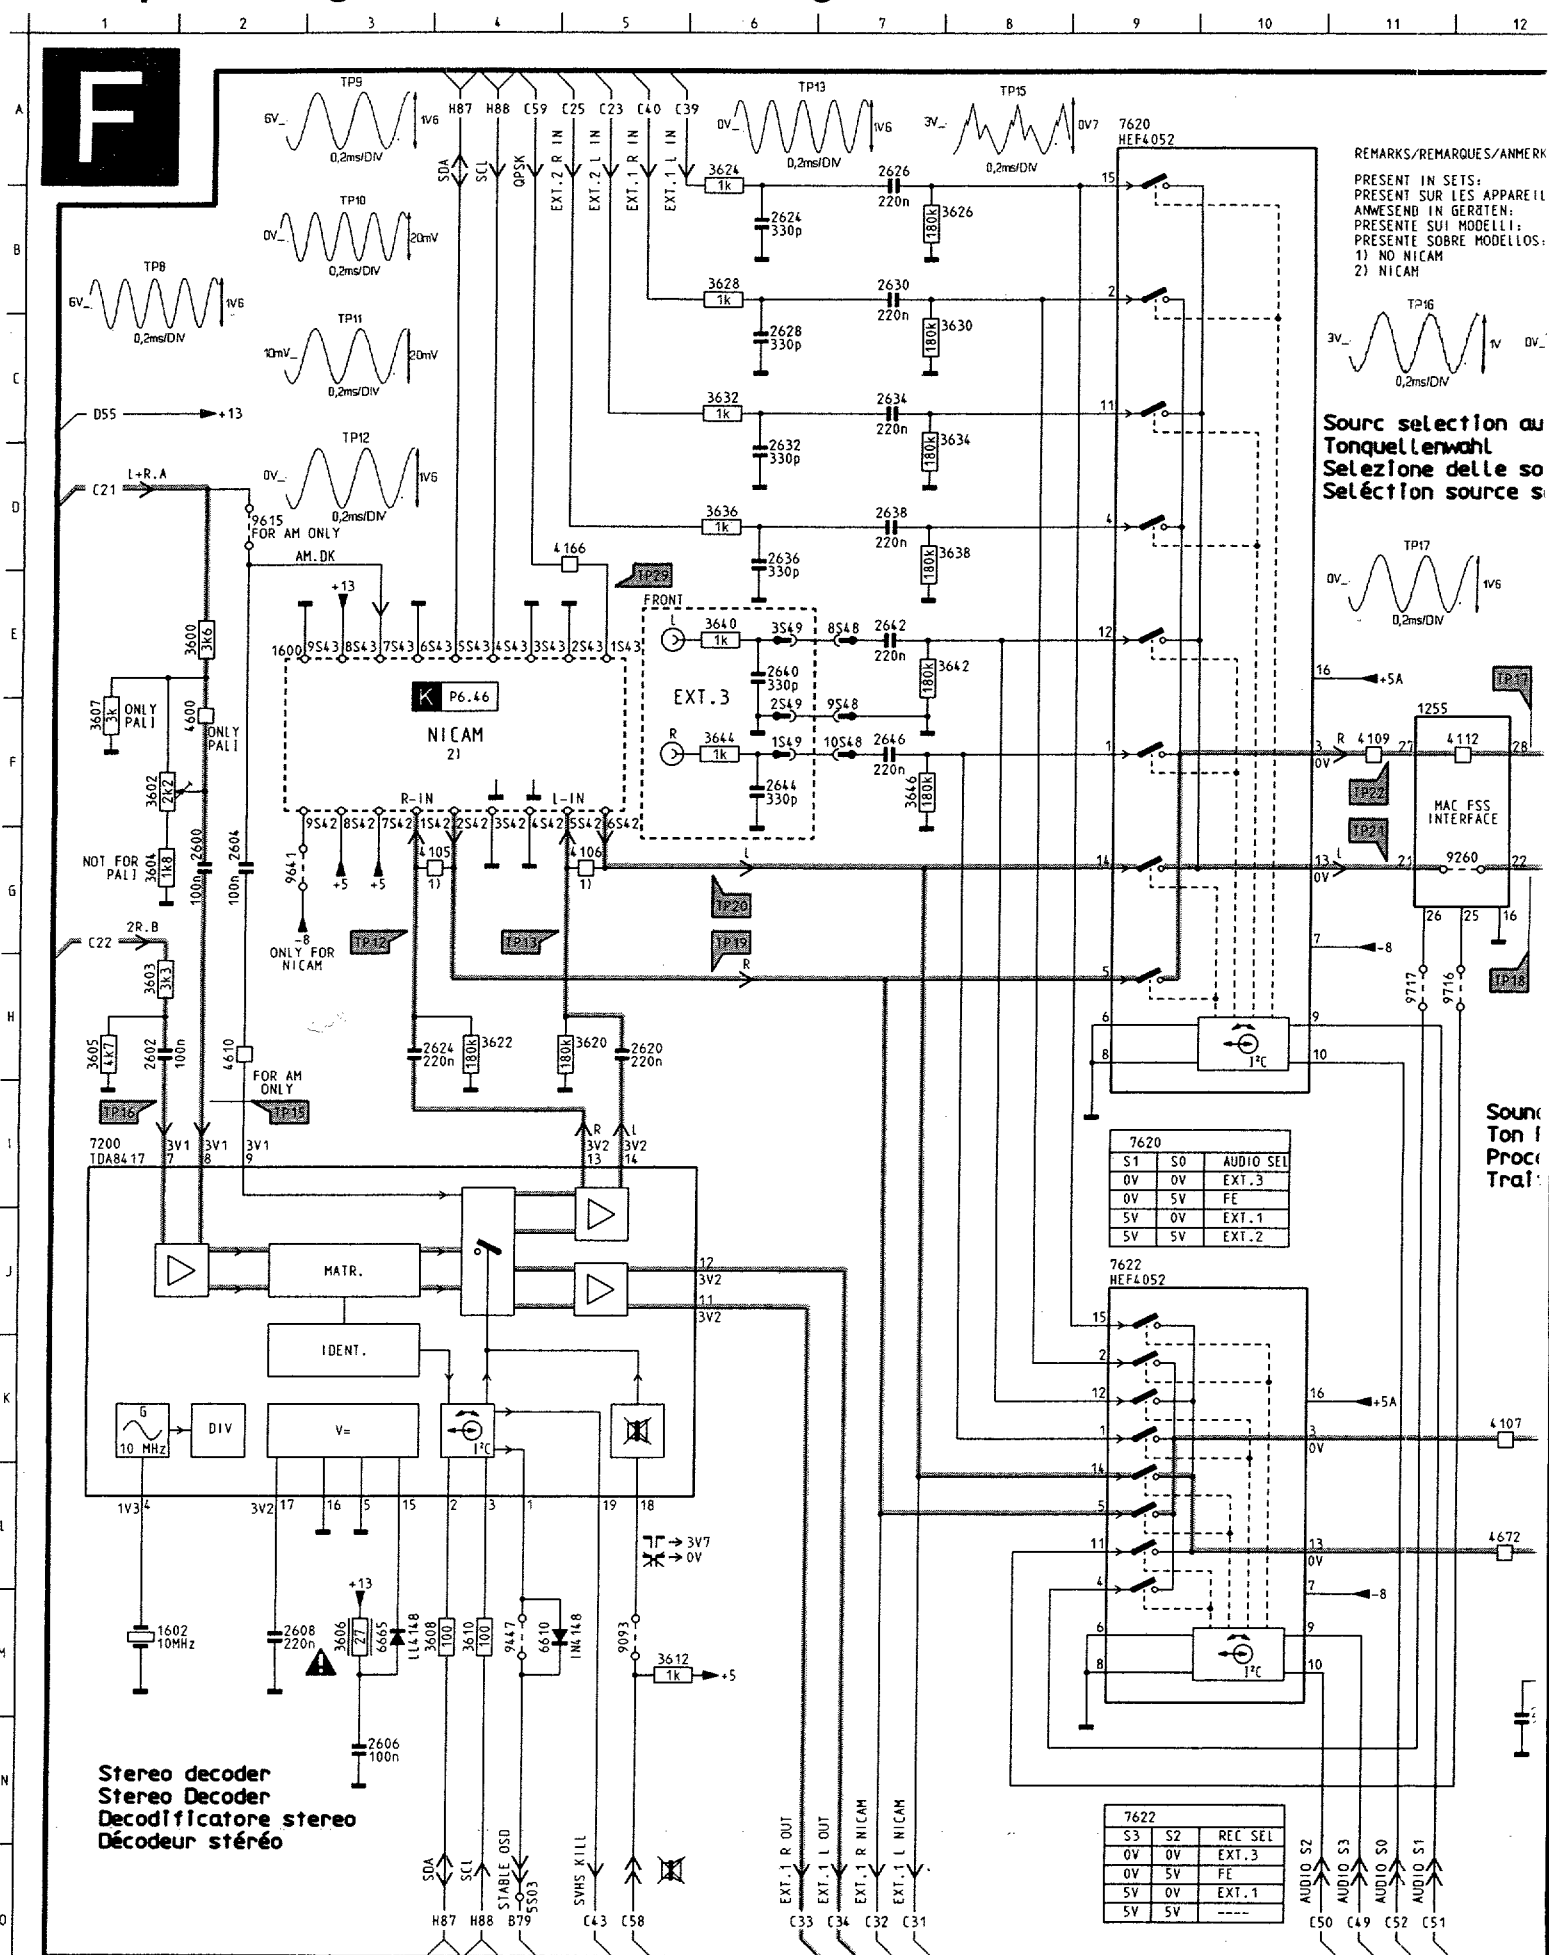


Traitement audio

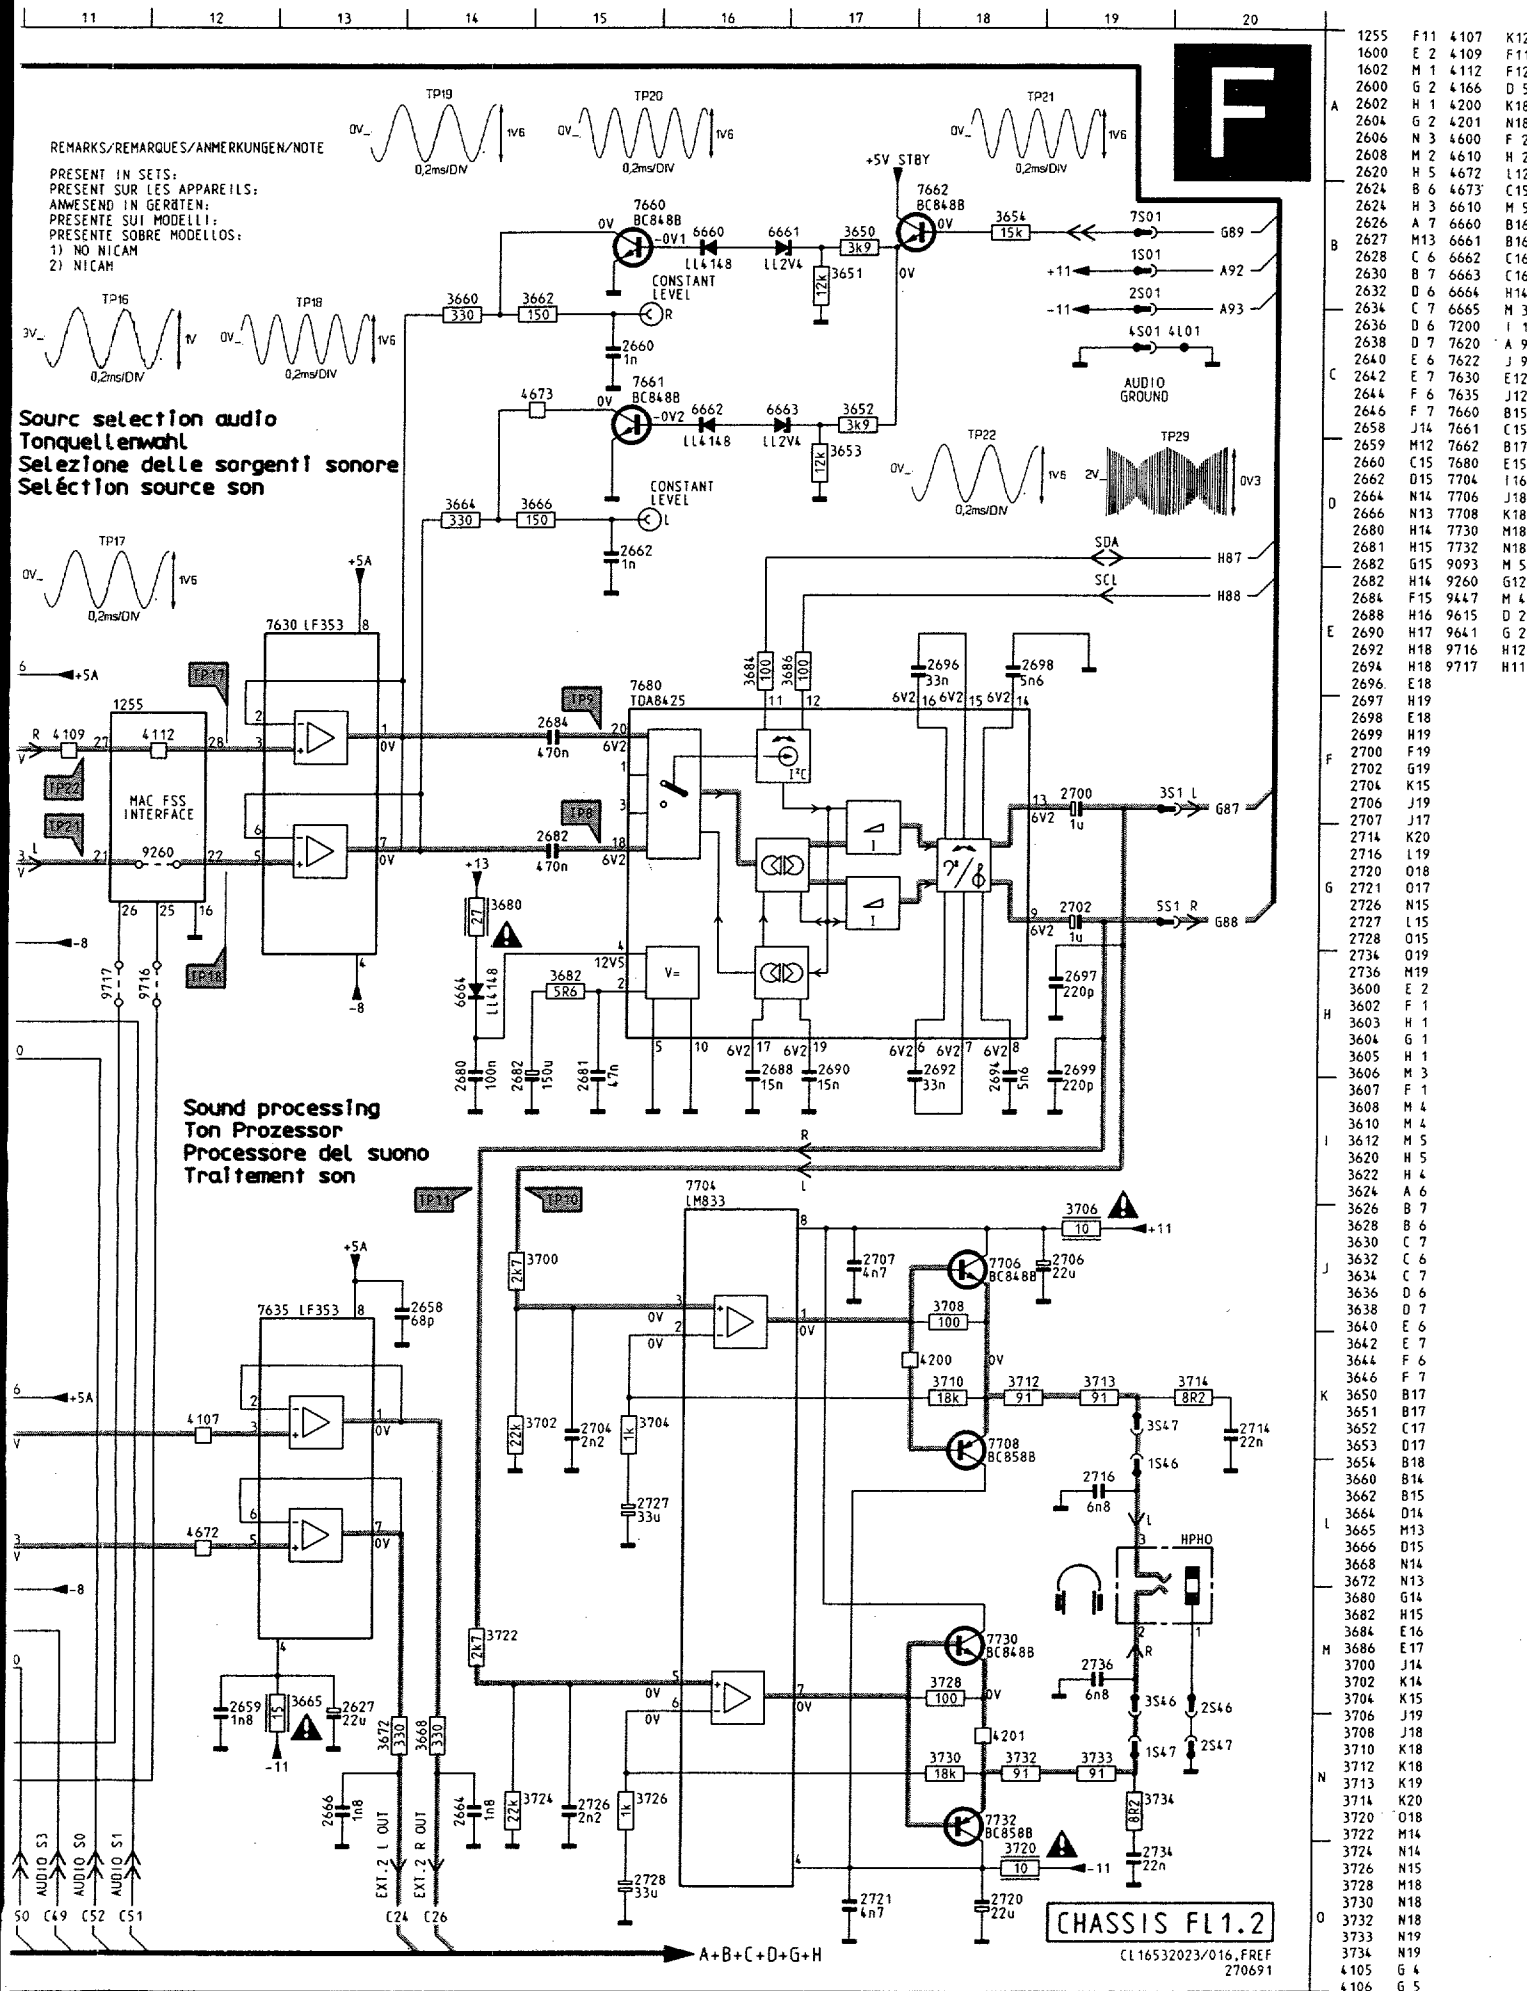


1255	F11	4107	K12
1600	E 2	4109	F11
1602	M 1	4112	F12
2600	G 2	4166	D 5
2602	H 1	4200	K18
2604	G 2	4201	N18
2606	N 3	4600	F 2
2608	M 2	4610	H 2
2620	H 5	4672	L12
2624	B 6	4673	C15
2624	H 3	6610	M 5
2626	A 7	6660	B16
2627	M13	6661	B16
2628	C 6	6662	C16
2630	B 7	6663	C16
2632	D 6	6664	H14
2634	C 7	6665	M 3
2636	D 6	7200	I 1
2638	D 7	7620	A 9
2640	E 6	7622	J 9
2642	E 7	7630	E12
2644	F 6	7635	J12
2646	F 7	7660	B15
2658	J14	7661	C15
2659	M12	7662	B17
2660	C15	7680	E15
2662	D15	7704	I16
2664	N14	7706	J18
2666	M13	7708	K18
2680	H14	7730	M18
2681	H15	7732	M18
2682	G15	9093	M 5
2682	H14	9260	G12
2684	F15	9417	M 4
2688	H16	9615	D 2
2690	H17	9641	G 2
2692	H18	9716	H12
2694	H18	9717	H11
2696	E18		
2697	H19		
2698	E18		
2699	H19		
2700	F19		
2702	G19		
2704	K15		
2706	J19		
2707	J17		
2714	K20		
2716	L19		
2720	O18		
2721	O17		
2722	L15		
2728	O15		
2734	O19		
2736	M19		
3600	E 2		
3602	F 1		
3603	H 1		
3604	G 1		
3605	H 1		
3606	M 3		
3607	F 1		
3608	M 4		
3610	M 4		
3612	M 5		
3620	H 5		
3622	H 4		
3624	A 6		
3626	B 7		
3628	B 6		
3630	C 7		
3632	C 6		
3634	C 7		
3636	D 6		
3638	D 7		
3640	E 6		
3642	E 7		
3644	F 6		
3646	F 7		
3650	B17		
3651	B17		
3652	C17		
3653	D17		
3654	B18		
3660	B14		
3662	B15		
3664	D14		
3665	M13		
3666	D15		
3668	N14		
3672	N13		
3680	G14		
3682	H15		
3684	E16		
3686	E17		
3700	J14		
3702	K14		
3704	K15		
3706	J19		
3708	J18		
3710	K18		
3712	K18		
3713	K19		
3714	K20		
3720	O18		
3722	M14		
3724	N14		
3726	N15		
3728	M18		
3730	N18		
3732	N18		
3733	N19		
3734	N19		
4105	G 4		
4106	G 5		

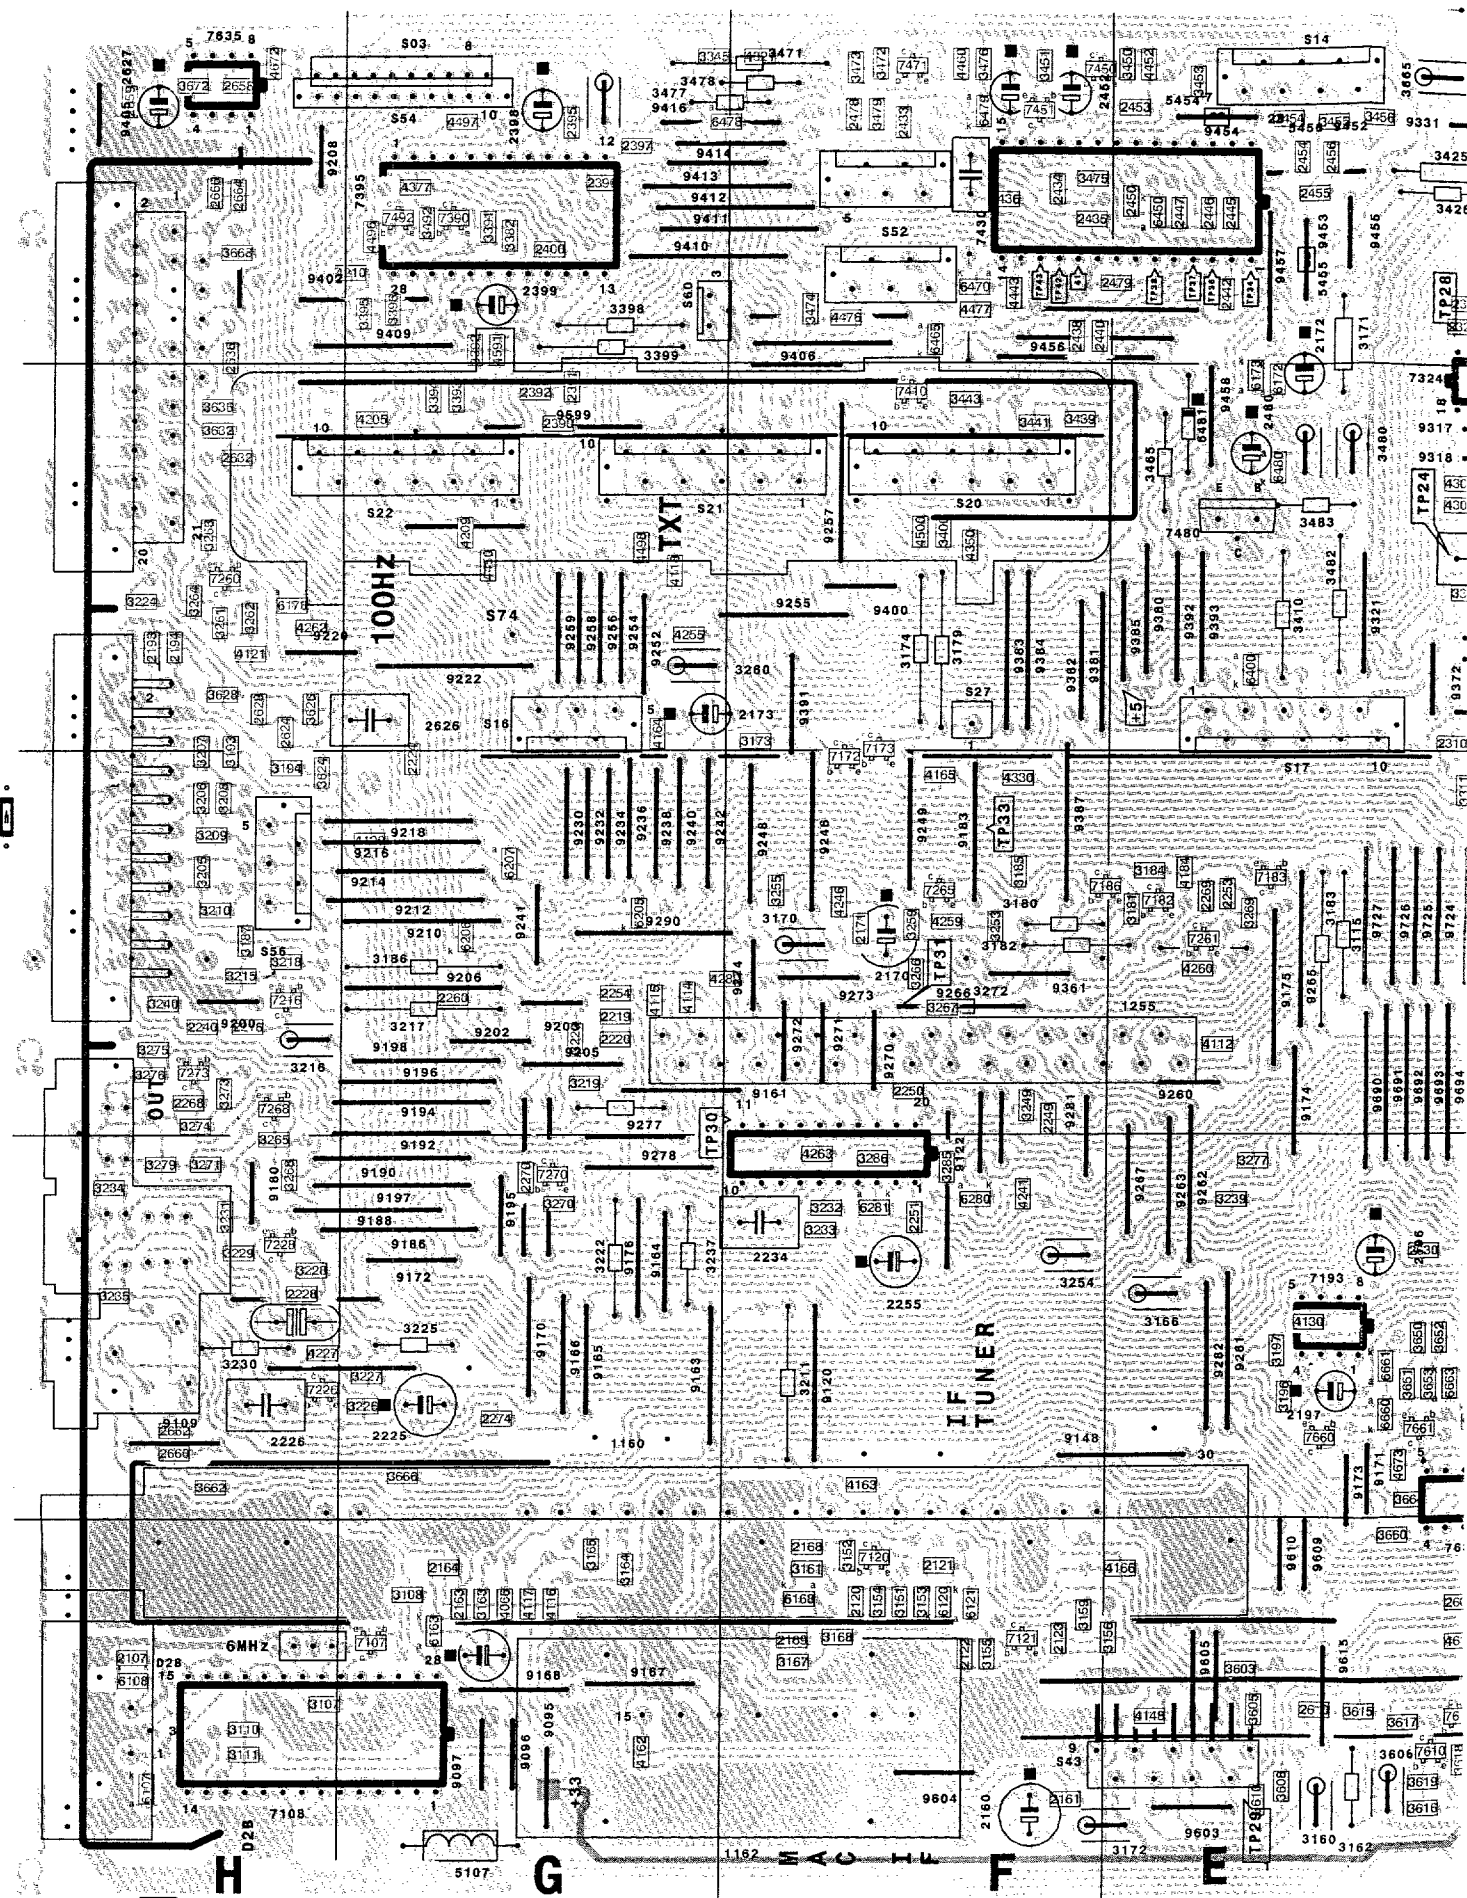


Platine petits signaux

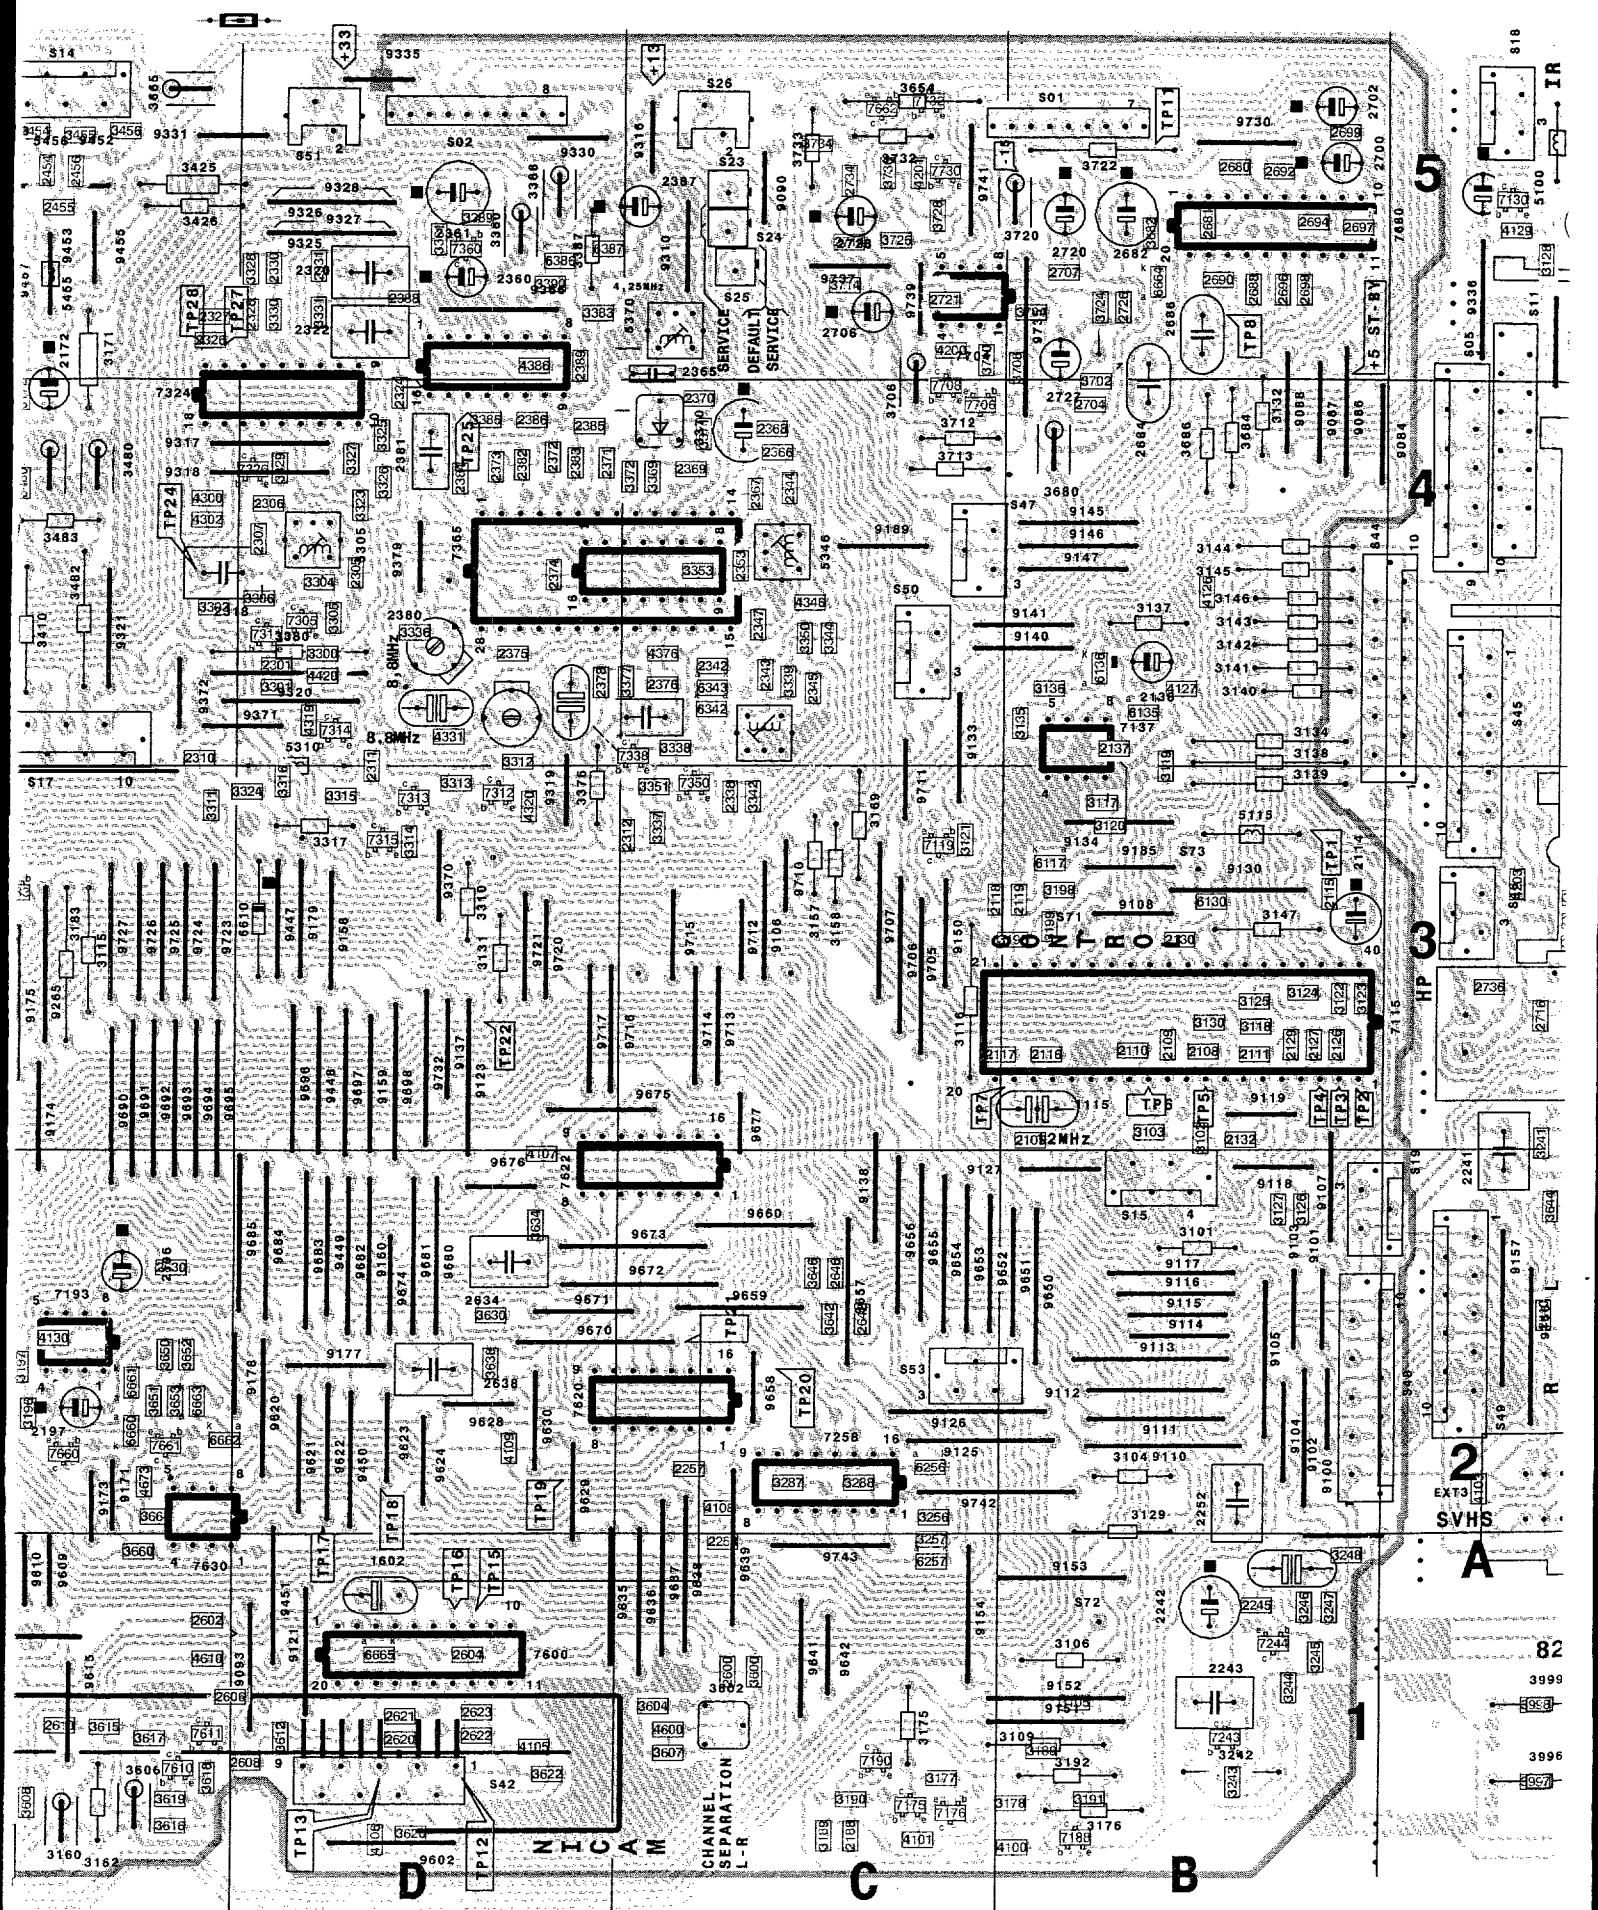


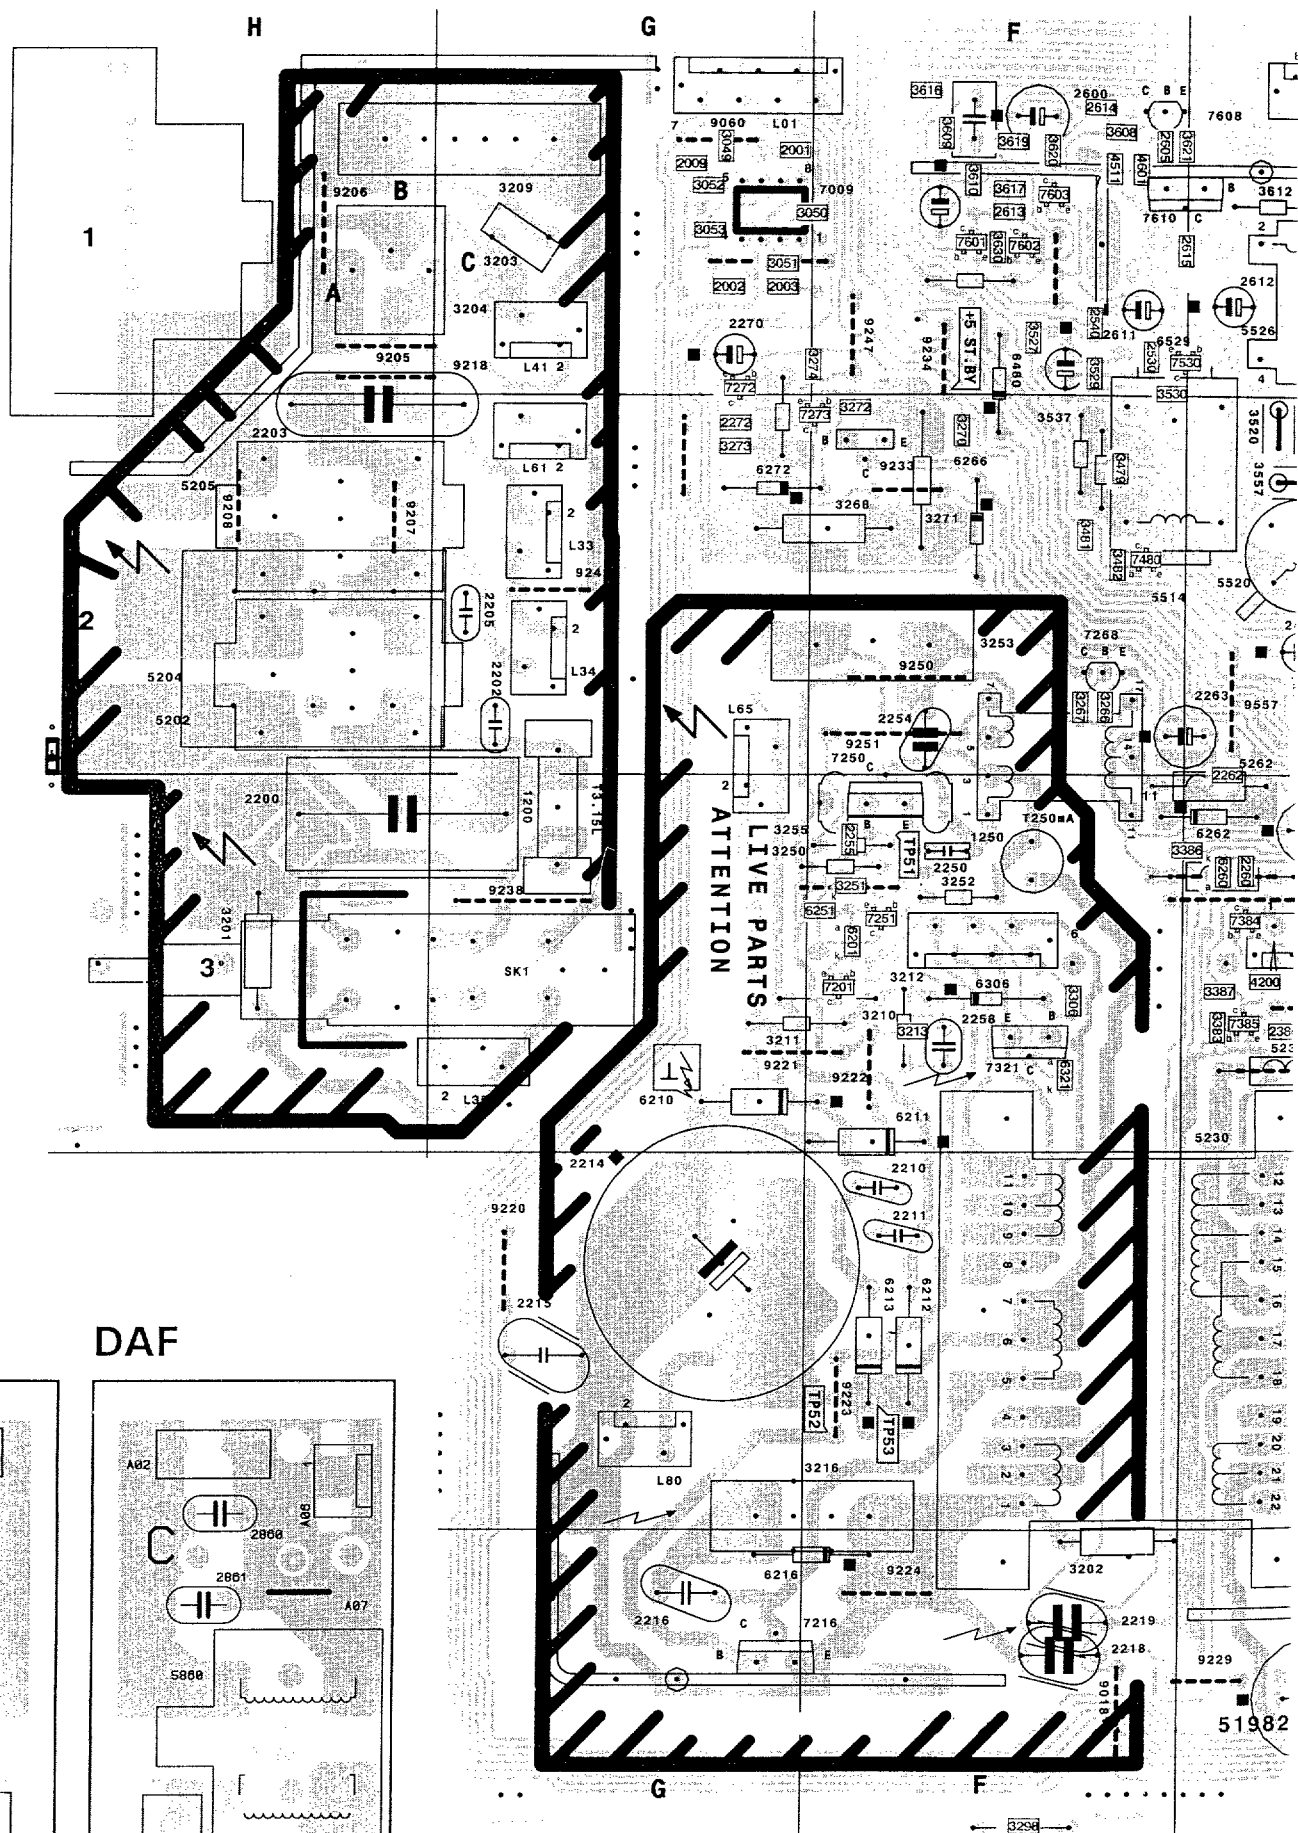



DAF

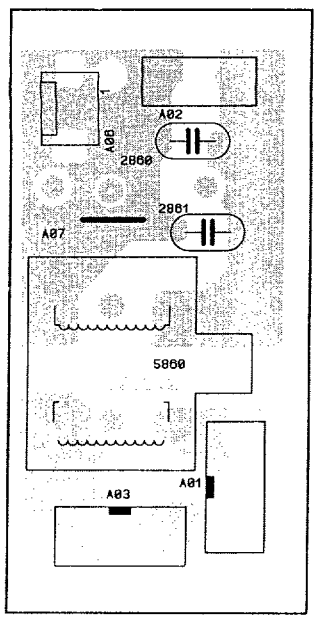

DAF

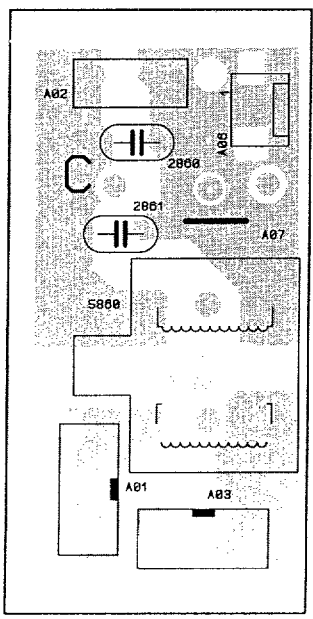

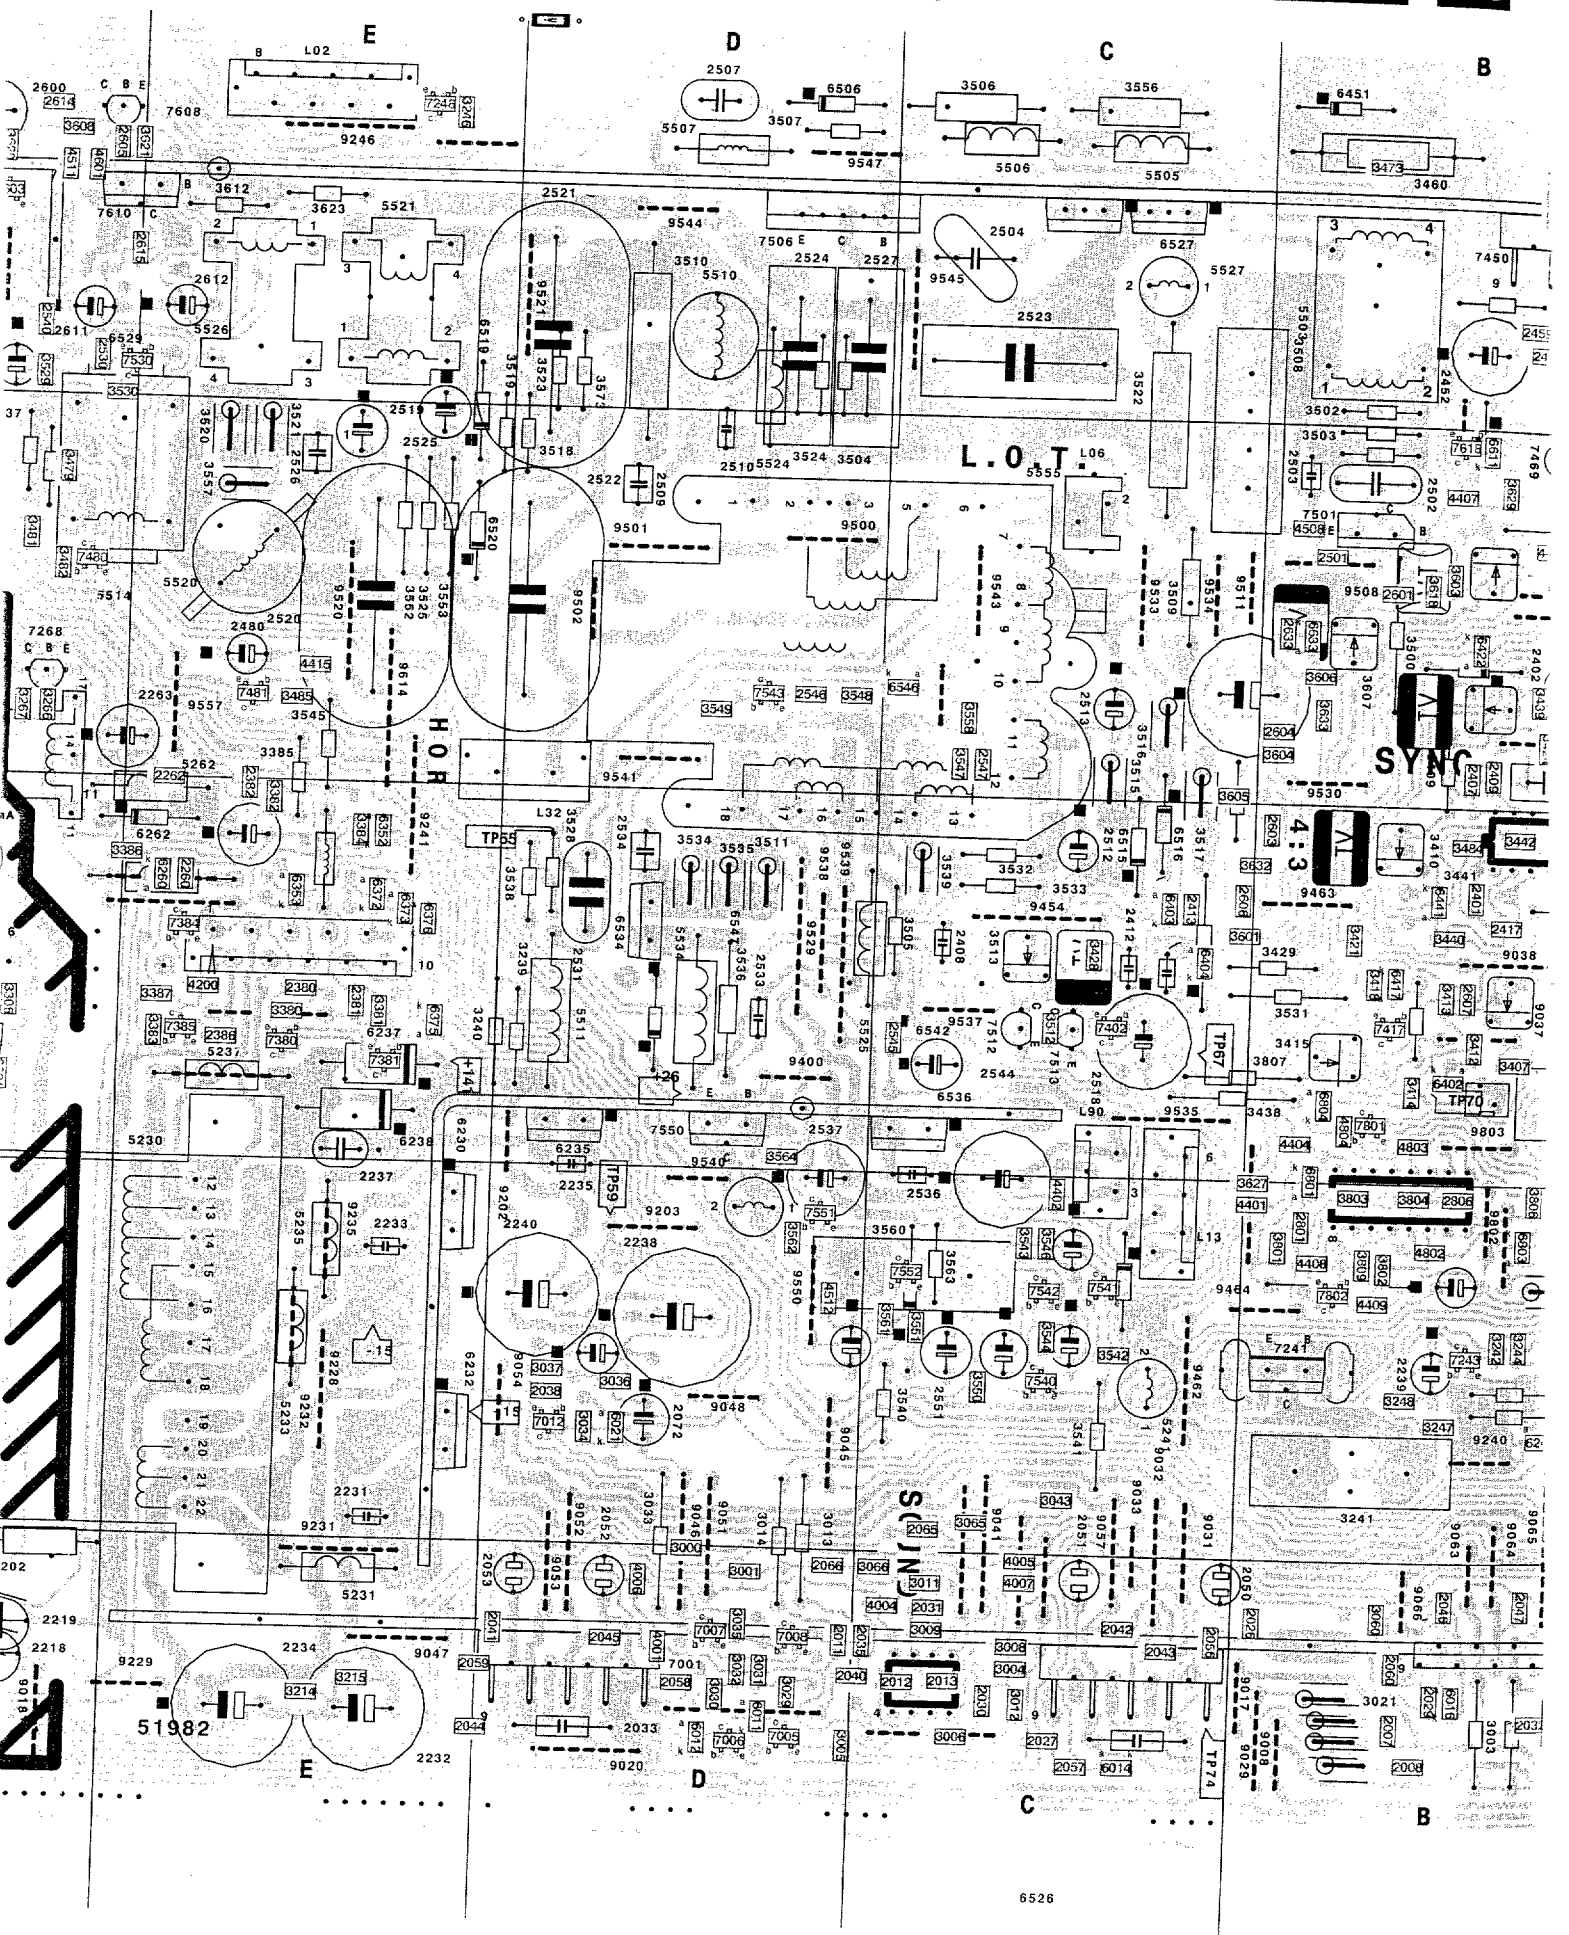


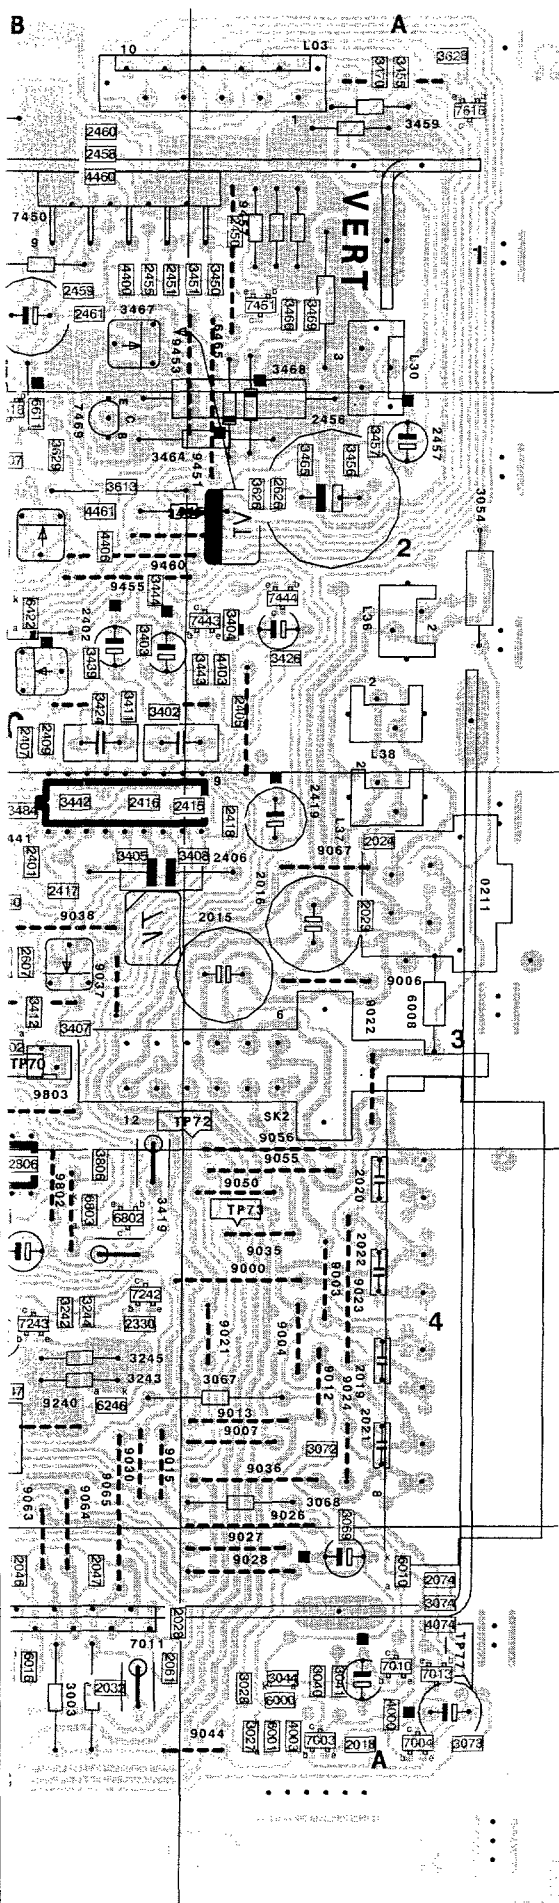


0207 A4	2417 B3	3054 A2	3470 A1	4511 F1	7009 G1	9206 H1
0211 A3	2418 A3	3060 B5	3473 B1	4512 D4	7010 A5	9207 H2
1200 G3	2419 A3	3065 F2	3479 F2	4601 F1	7011 B5	9208 H2
1240 C4	2450 A1	3066 C5	3480 B1	4802 B4	7012 D4	9216 G2
1250 F3	2451 B1	3067 A4	3481 F2	4803 B3	7013 A5	9217 G2
2001 G1	2452 B1	3068 A4	3482 F2	4804 B3	7201 F3	9218 H1
2002 G1	2455 B1	3069 A5	3484 B3	5202 H2	7216 G5	9219 E3
2003 G1	2456 A2	3072 A4	3485 E2	5204 H2	7241 B4	9220 G4
2007 B5	2457 A2	3073 A5	3500 B2	5205 H2	7242 B4	9221 G3
2008 B5	2458 B1	3074 A5	3501 C2	5210 D2	7243 B4	9222 F3
2009 G1	2459 B1	3201 H3	3502 B1	5230 F4	7246 E1	9223 F4
2011 D5	2460 B1	3202 F5	3503 B2	5231 E5	7246 E1	9224 F5
2012 C5	2461 B1	3203 G1	3504 D1	5233 E4	7250 F3	9225 E3
2013 C5	2480 E2	3204 G1	3505 C3	5235 E4	7251 F3	9228 E4
2015 A3	2501 B2	3209 G1	3506 C1	5237 E3	7258 F2	9229 E5
2016 A3	2502 B2	3210 F3	3507 D1	5241 C4	7270 F2	9230 F3
2017 A5	2503 B2	3211 G3	3508 C2	5255 F3	7272 G1	9231 E5
2018 A5	2504 C1	3212 G3	3509 C2	5260 E3	7273 F2	9232 E4
2019 A4	2507 D1	3213 F3	3510 D1	5262 E3	7380 E3	9233 F2
2020 A4	2509 D2	3214 E5	3511 D2	5381 E3	7381 E3	9234 F1
2021 A4	2510 D2	3215 E5	3512 D2	5503 B1	7384 E3	9235 E4
2022 A4	2511 C2	3216 F4	3515 C3	5505 C1	7385 E3	9238 G3
2023 A3	2512 C3	3239 D3	3514 F2	5506 C1	7400 B3	9240 B4
2024 A3	2513 C2	3240 D3	3515 C2	5507 D1	7401 B4	9241 E3
2026 B5	2517 C3	3241 B4	3516 C2	5510 D1	7402 C3	9242 G2
2027 C5	2518 C3	3242 B4	3517 C2	5511 D3	7417 B3	9243 E3
2028 B5	2519 E2	3243 B4	3518 D2	5514 F2	7443 A2	9246 E1
2029 B5	2520 E2	3244 B4	3519 E2	5520 E2	7444 A2	9247 F1
2031 C5	2521 D1	3254 B4	3520 E2	5521 E1	7450 B1	9250 F2
2032 B5	2522 D1	3246 E1	3521 E2	5524 D2	7451 A1	9251 F2
2033 D5	2523 C1	3247 B4	3523 D1	5525 D3	7469 B2	9400 D3
2035 C5	2524 D1	3248 B4	3524 D2	5526 E1	7480 D2	9451 A1
2038 D4	2525 E2	3249 F3	3525 E2	5527 C1	7481 E2	9453 B2
2040 D5	2526 E2	3250 F3	3528 D3	5534 D3	7501 B2	9454 C3
2041 D5	2527 D1	3251 F3	3529 F1	5543 D4	7506 D1	9455 B2
2042 C5	2529 F1	3252 F3	3530 F1	5555 D3	7512 C3	9456 B2
2043 C5	2530 F1	3253 F2	3531 B3	6000 A5	7530 F1	9457 A1
2044 E5	2531 D3	3255 F3	3532 C3	6001 A5	7540 C4	9458 A1
2045 D5	2533 D3	3266 F2	3533 C3	6008 A3	7541 C4	9460 B2
2046 B5	2534 D3	3267 F2	3534 D3	6010 A5	7542 C4	9461 B4
2047 B5	2535 C4	3268 F2	3535 D3	6012 D5	7543 D2	9462 C4
2050 C5	2536 C4	3270 F2	3536 D3	6014 C5	7547 D3	9463 B3
2051 C5	2537 D4	3271 F2	3537 F2	6016 B5	7550 D3	9464 C4
2052 D5	2540 F1	3272 F2	3538 D3	6020 A4	7551 D4	9468 B3
2053 D5	2541 C4	3273 G2	3539 C3	6021 D4	7552 C4	9471 B2
2056 C5	2542 C4	3274 G1	3540 C4	6201 F3	7601 F1	9472 A2
2057 C5	2543 C4	3275 G2	3541 C4	6210 G3	7602 F1	9500 D2
2058 D5	2545 C3	3298 F5	3542 C4	6211 F3	7603 F1	9501 D2
2059 E5	2546 D2	3299 F5	3543 C4	6212 F4	7608 F1	9502 D2
2060 B5	2547 C2	3306 F3	3544 C4	6213 F4	7610 E1	9508 B2
2061 B5	2551 C4	3357 E2	3545 E2	6216 F5	7618 B2	9511 C2
2065 C4	2600 F1	3376 E3	3546 C4	6230 E4	7801 B3	9520 E2
2066 D5	2601 B2	3380 E3	3550 C4	6232 E4	7802 B4	9521 D1
2070 A5	2604 B2	3381 E3	3553 E2	6235 D3	9000 A4	9529 D3
2071 A5	2605 F1	3382 E3	3556 C1	6237 E3	9001 C5	9530 B2
2072 D4	2606 C3	3383 E3	3558 C2	6238 E3	9003 A4	9533 C2
2073 D4	2607 B3	3384 E3	3561 C4	6246 B4	9004 A4	9534 C2
2074 A5	2609 F1	3385 E2	3562 D4	6251 F3	9007 A4	9535 C3
2200 H3	2610 F1	3386 E3	3573 D1	6260 E3	9008 B5	9537 C3
2202 G2	2611 F1	3387 E3	3601 C3	6262 E3	9010 C5	9538 D3
2203 H2	2612 E1	3402 A2	3602 B2	6266 F2	9012 A4	9539 D3
2205 G2	2613 F1	3403 B2	3603 B2	6272 G2	9013 A4	9540 D4
2210 F4	2614 F1	3404 A2	3604 B2	6280 C4	9015 B4	9541 D2
2211 F4	2615 F1	3405 B3	3605 C2	6321 F3	9017 C5	9542 C2
2214 G4	2626 A2	3406 B3	3606 B2	6352 E3	9028 F5	9543 C2
2215 G4	2632 B3	3407 B3	3607 B2	6353 E3	9020 D5	9544 D1
2216 G5	2633 B2	3408 B3	3608 F1	6372 E3	9021 A4	9545 C1
2217 F3	2801 B4	3409 B3	3609 F1	6373 E3	9022 A3	9547 D1
2218 F6	3000 D4	3410 B3	3610 F1	6375 E3	9023 A4	9549 E1
2219 F5	3001 D5	3411 B2	3612 E1	6376 E3	9024 A4	9552 F1
2231 E4	3002 B5	3412 B2	3613 B2	6402 B3	9026 A4	9557 E2
2232 E5	3003 B5	3413 B3	3615 F1	6403 C3	9027 A5	9614 E2
2233 E4	3004 C5	3414 B3	3616 F1	6404 C3	9028 A5	9615 B2
2234 E5	3005 D5	3415 B3	3617 F1	6417 B3	9029 B5	9602 B4
2235 D3	3006 C5	3416 B3	3618 B2	6422 B2	9030 B4	9803 B3
2236 D4	3008 C5	3417 B3	3619 F1	6441 B3	9031 C4	
2237 E3	3009 C5	3418 B3	3620 F1	6451 B1	9033 C5	L01 F1
2238 D4	3011 C5	3419 B4	3621 F1	6453 B1	9034 C5	L02 E1
2239 B4	3012 C5	3421 B3	3623 E1	6480 F1	9035 A4	L03 A1
2250 F3	3013 D4	3423 B2	3624 E1	6506 D1	9036 A4	L06 C2
2254 F2	3014 D4	3424 B2	3626 A2	6515 C3	9037 B3	L13 C4
2255 F3	3016 B5	3426 A2	3627 B4	6516 C3	9038 B3	L27 B3
2258 F3	3019 B5	3428 C3	3630 F1	6517 C3	9039 B3	L30 A1
2260 E3	3020 B5	3429 B3	3632 C3	6519 E2	9041 C4	L32 D3
2261 E3	3021 B5	3430 B3	3801 B4	6520 E2	9042 C4	L33 G2
2262 E3	3022 B5	3437 B1	3802 B4	6527 C1	9043 D5	L34 G2
2263 E2	3023 C5	3438 B3	3804 B4	6529 F1	9044 A5	L35 G3
2270 G1	3024 C5	3439 B2	3806 B4	6534 D3	9045 D4	L36 A2
2272 G2	3026 D5	3440 B3	3807 B3	6536 C3	9046 D4	L37 A3
2330 B4	3027 A5	3442 B3	3809 B4	6537 C3	9047 E5	L38 A2
2380 E3	3028 A5	3443 A2	4000 A5	6542 C3	9048 D4	L39 F3
2381 E3	3029 D5	3444 B2	4001 D5	6546 C2	9050 A4	L40 E3
2382 E3	3030 D5	3450 A1	4003 A5	6547 D3	9051 D4	L41 G1
2386 E3	3031 D5	3451 A1	4004 C5	6551 D4	9052 D4	L61 G2
2401 B3	3032 D5	3455 A1	4005 C5	6601 E1	9053 D5	L65 D2
2402 B2	3033 D4	3456 A2	4006 D5	6611 B2	9054 D4	L66 D1
2403 A2	3034 D4	3457 A2	4007 C5	6801 B4	9055 A4	L70 A2
2404 A2	3035 C5	3458 A1	4074 A5	6802 B4	9056 A4	L80 G4
2405 A2	3036 D4	3459 A1	4200 E3	6803 B4	9057 C4	L90 C3
2406 B3	3037 D4	3460 B1	4402 C4	6804 B4	9058 G2	SK1 G3
2407 B2	3040 A5	3461 A1	4403 A2	7000 C5	9058 G1	SK2 A3
2408 C3	3041 A5	3462 A1	4406 B2	7001 D5	9060 G1	
2409 B2	3043 C4	3463 A1	4407 B1	7002 C5	9063 B5	
2410 B2	3044 A5	3464 A2	4408 B4	7003 A5	9064 B5	
2411 B2	3049 G1	3465 A2	4409 B4	7004 A5	9065 B4	
2412 C3	3050 G1	3466 A1	4415 E2	7005 D5	9066 B5	
2413 C3	3051 G1	3467 B2	4460 B1	7006 D5	9067 A3	
2415 A3	3052 G1	3468 A2	4461 B2	7007 D5	9203 D4	
2416 B3	3053 G1	3469 A1	4508 B2	7008 D5	9205 H1	







G


Main sound output amplifiers
Haupt-Tonendstufen
Amplificatori di potenza del suono
Amplificateurs principaux de sortie son

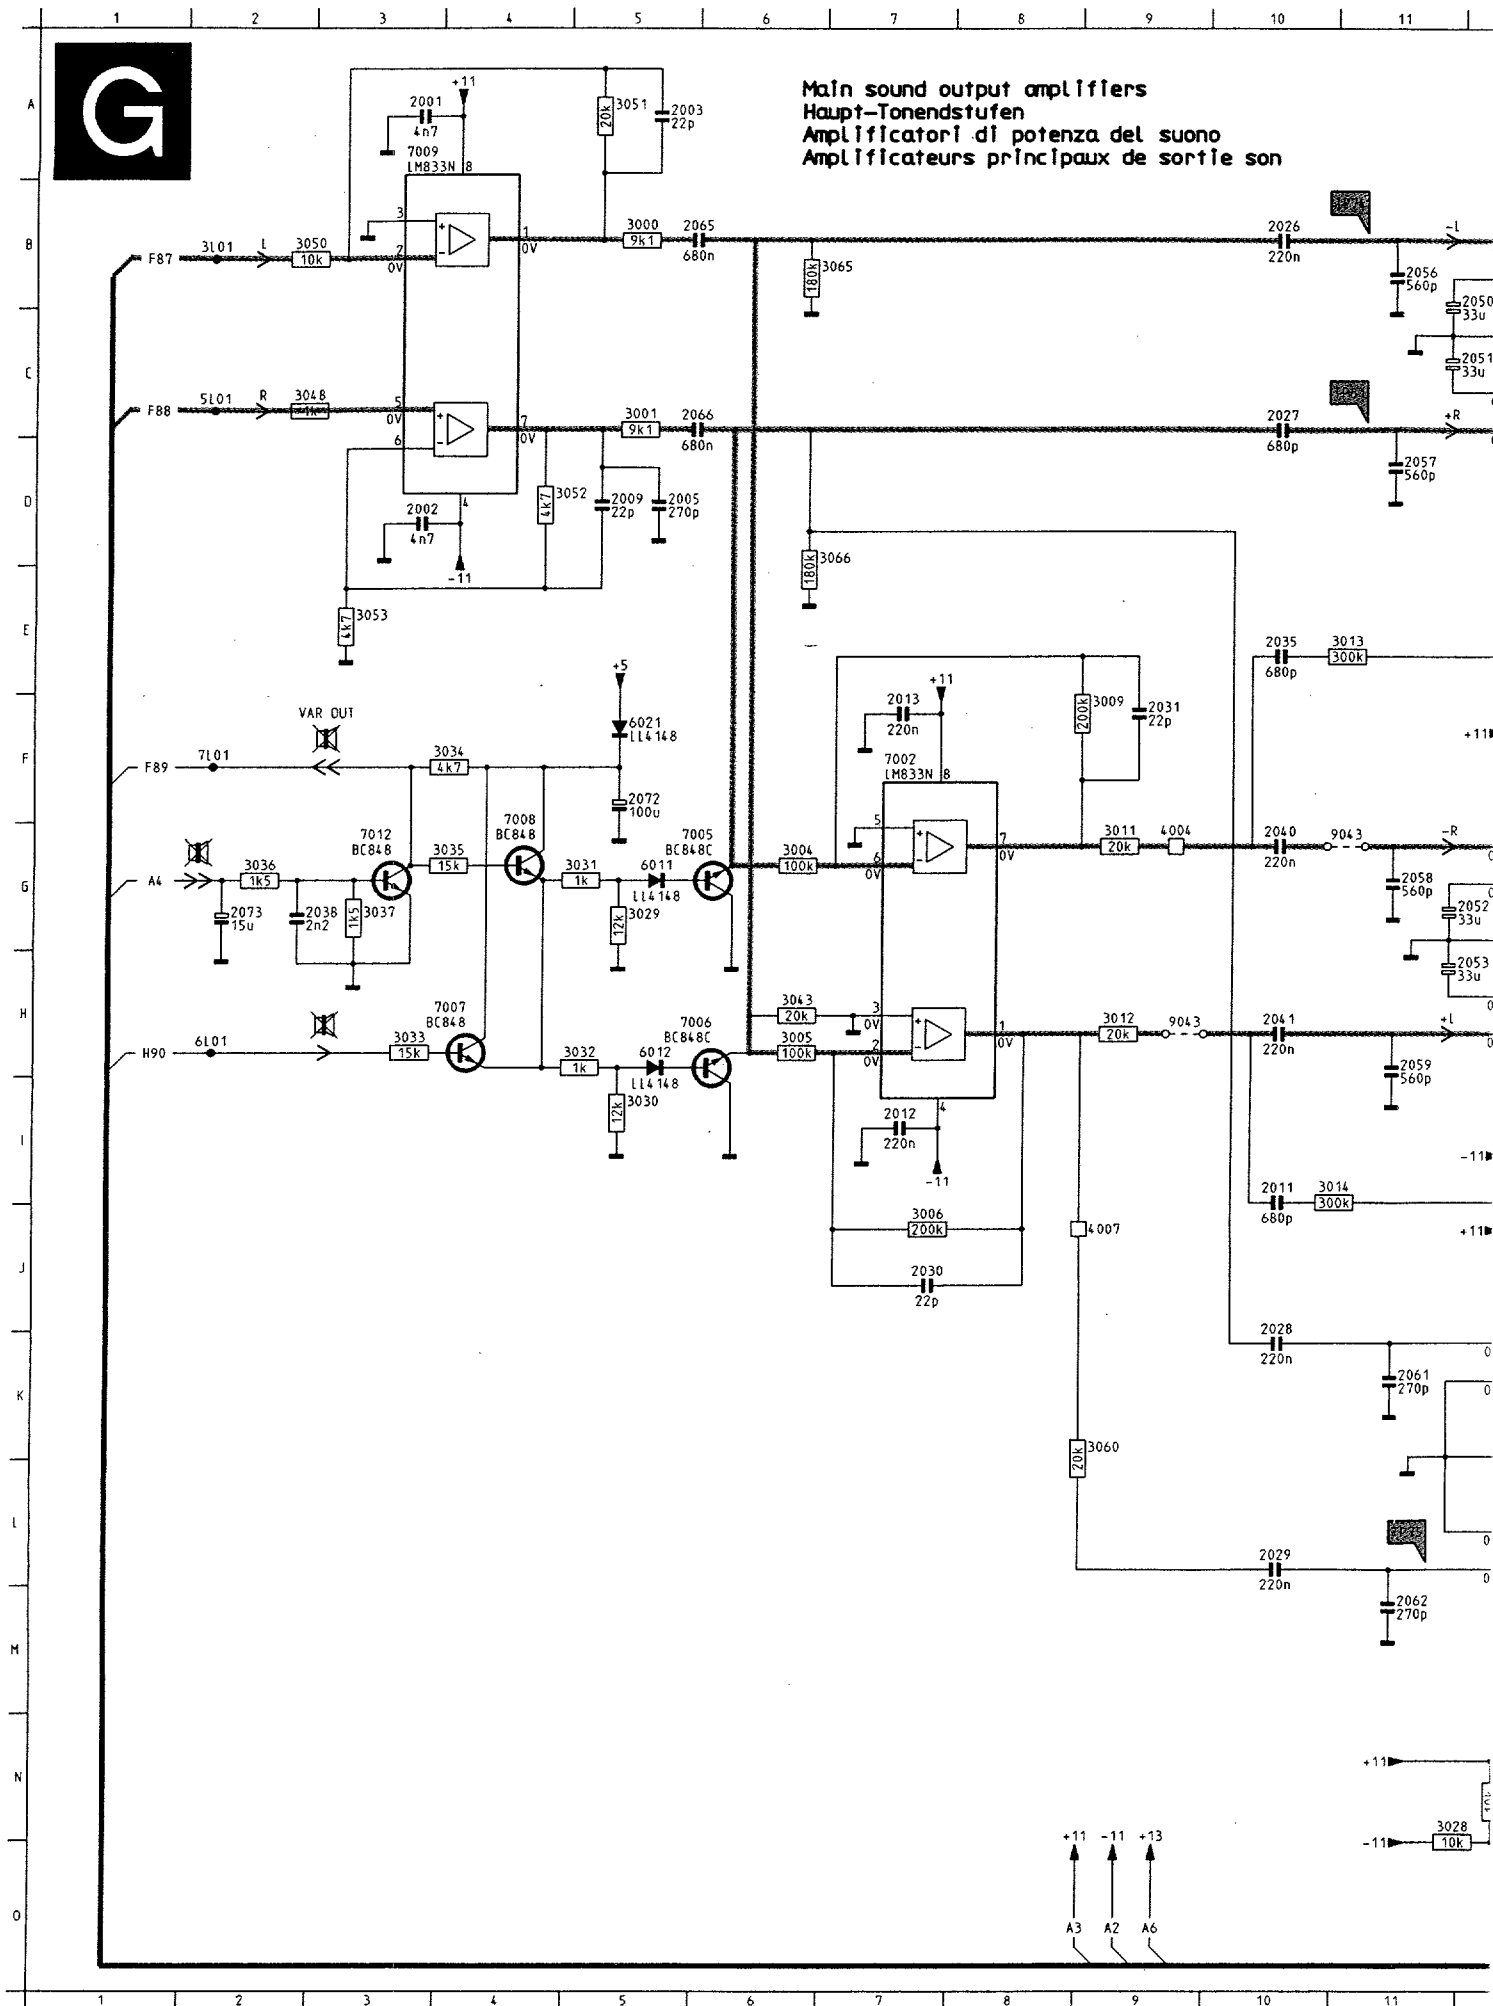

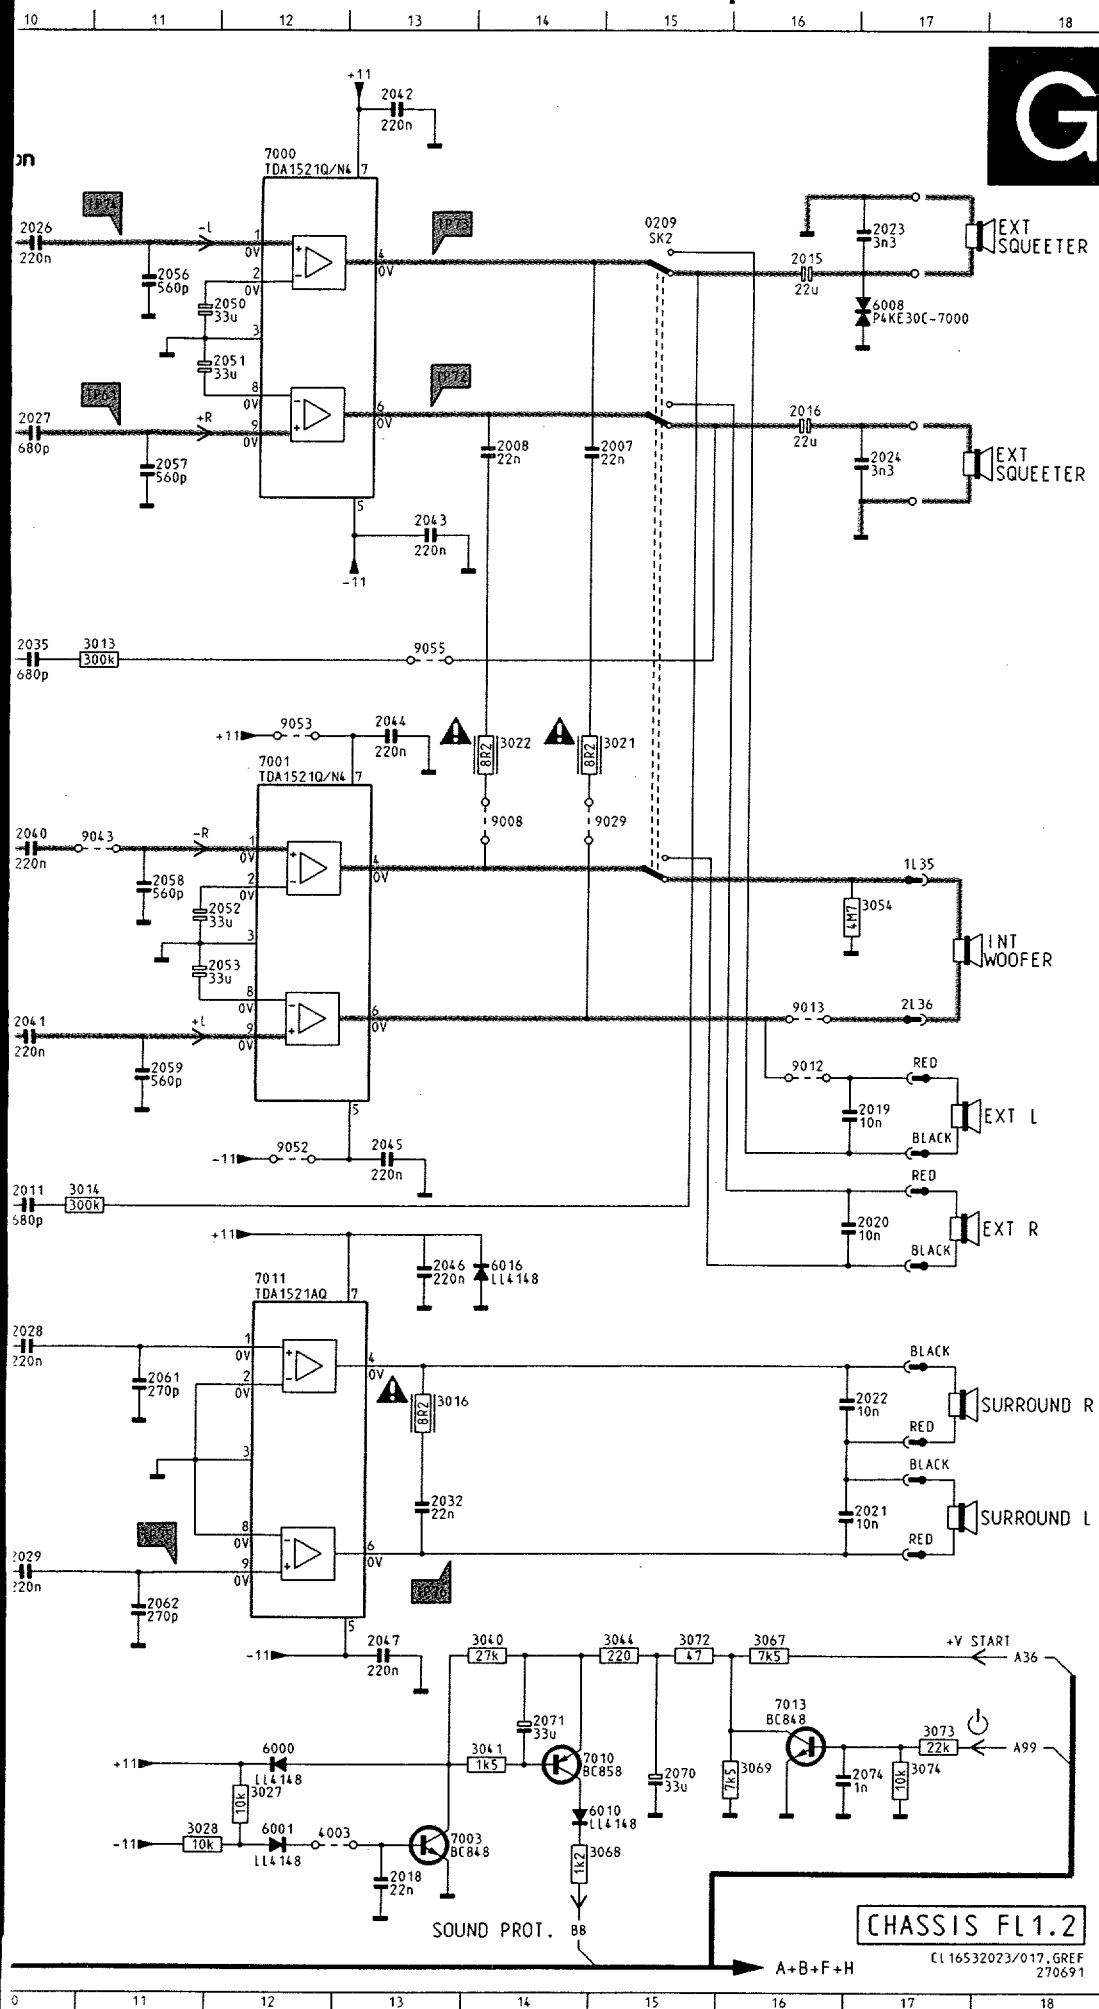

0209 B15 7009 A 3
2001 A 3 7010 N14
2002 D 3 7011 J12
2003 A 5 7012 G 3
2005 D 5 7013 M16
2007 D14 9008 F14
2008 D14 9012 H16
2009 D 5 9013 H16
2011 I10 9029 F14
2012 I 7 9043 G11
2013 F 7 9043 H 9
2015 B16 9052 I12
2016 C16 9053 F12
2018 D13 9055 E13
2019 I17
2020 J17
2021 L17
2022 K17
2023 B17
2024 D17
2026 B10
2027 C10
2028 K10
2029 L10
2030 J 7
2031 F 9
2032 L13
2035 E10
2038 G 2
2040 G10
2041 H10
2042 A13
2043 D13
2044 F13
2045 I13
2046 J13
2047 M13
2050 B11
2051 C11
2052 G11
2053 H11
2056 B11
2057 D11
2058 G11
2059 H11
2061 K11
2062 M11
2065 B 5
2066 C 5
2070 N15
2071 N14
2072 F 5
2073 G 2
2074 N17
3000 B 5
3001 C 5
3004 G 6
3005 H 6
3006 J 7
3009 F 9
3011 G 9
3012 H 9
3013 E11
3014 I11
3016 K13
3021 F15
3022 F14
3027 N12
3028 N11
3029 G 5
3030 I 5
3031 G 5
3032 H 5
3033 H 3
3034 F 4
3035 G 4
3036 G 2
3037 G 3
3040 M14
3041 N14
3043 H 6
3044 M15
3048 C 2
3050 B 2
3051 A 5
3052 D 4
3053 E 3
3054 G17
3060 K 9
3065 B 6
3066 D 6
3067 M16
3068 D14
3069 N16
3072 M15
3073 N17
3074 N17
4003 M13
4004 G 9
4007 J 9
6000 N12
6001 N12
6008 B17
6010 N14
6011 G 5
6012 H 5
6016 J14
6021 F 5
7000 A12
7001 F12
7002 F 7
7003 D13
7005 G 5
7006 H 5
7007 H 3
7008 G 4



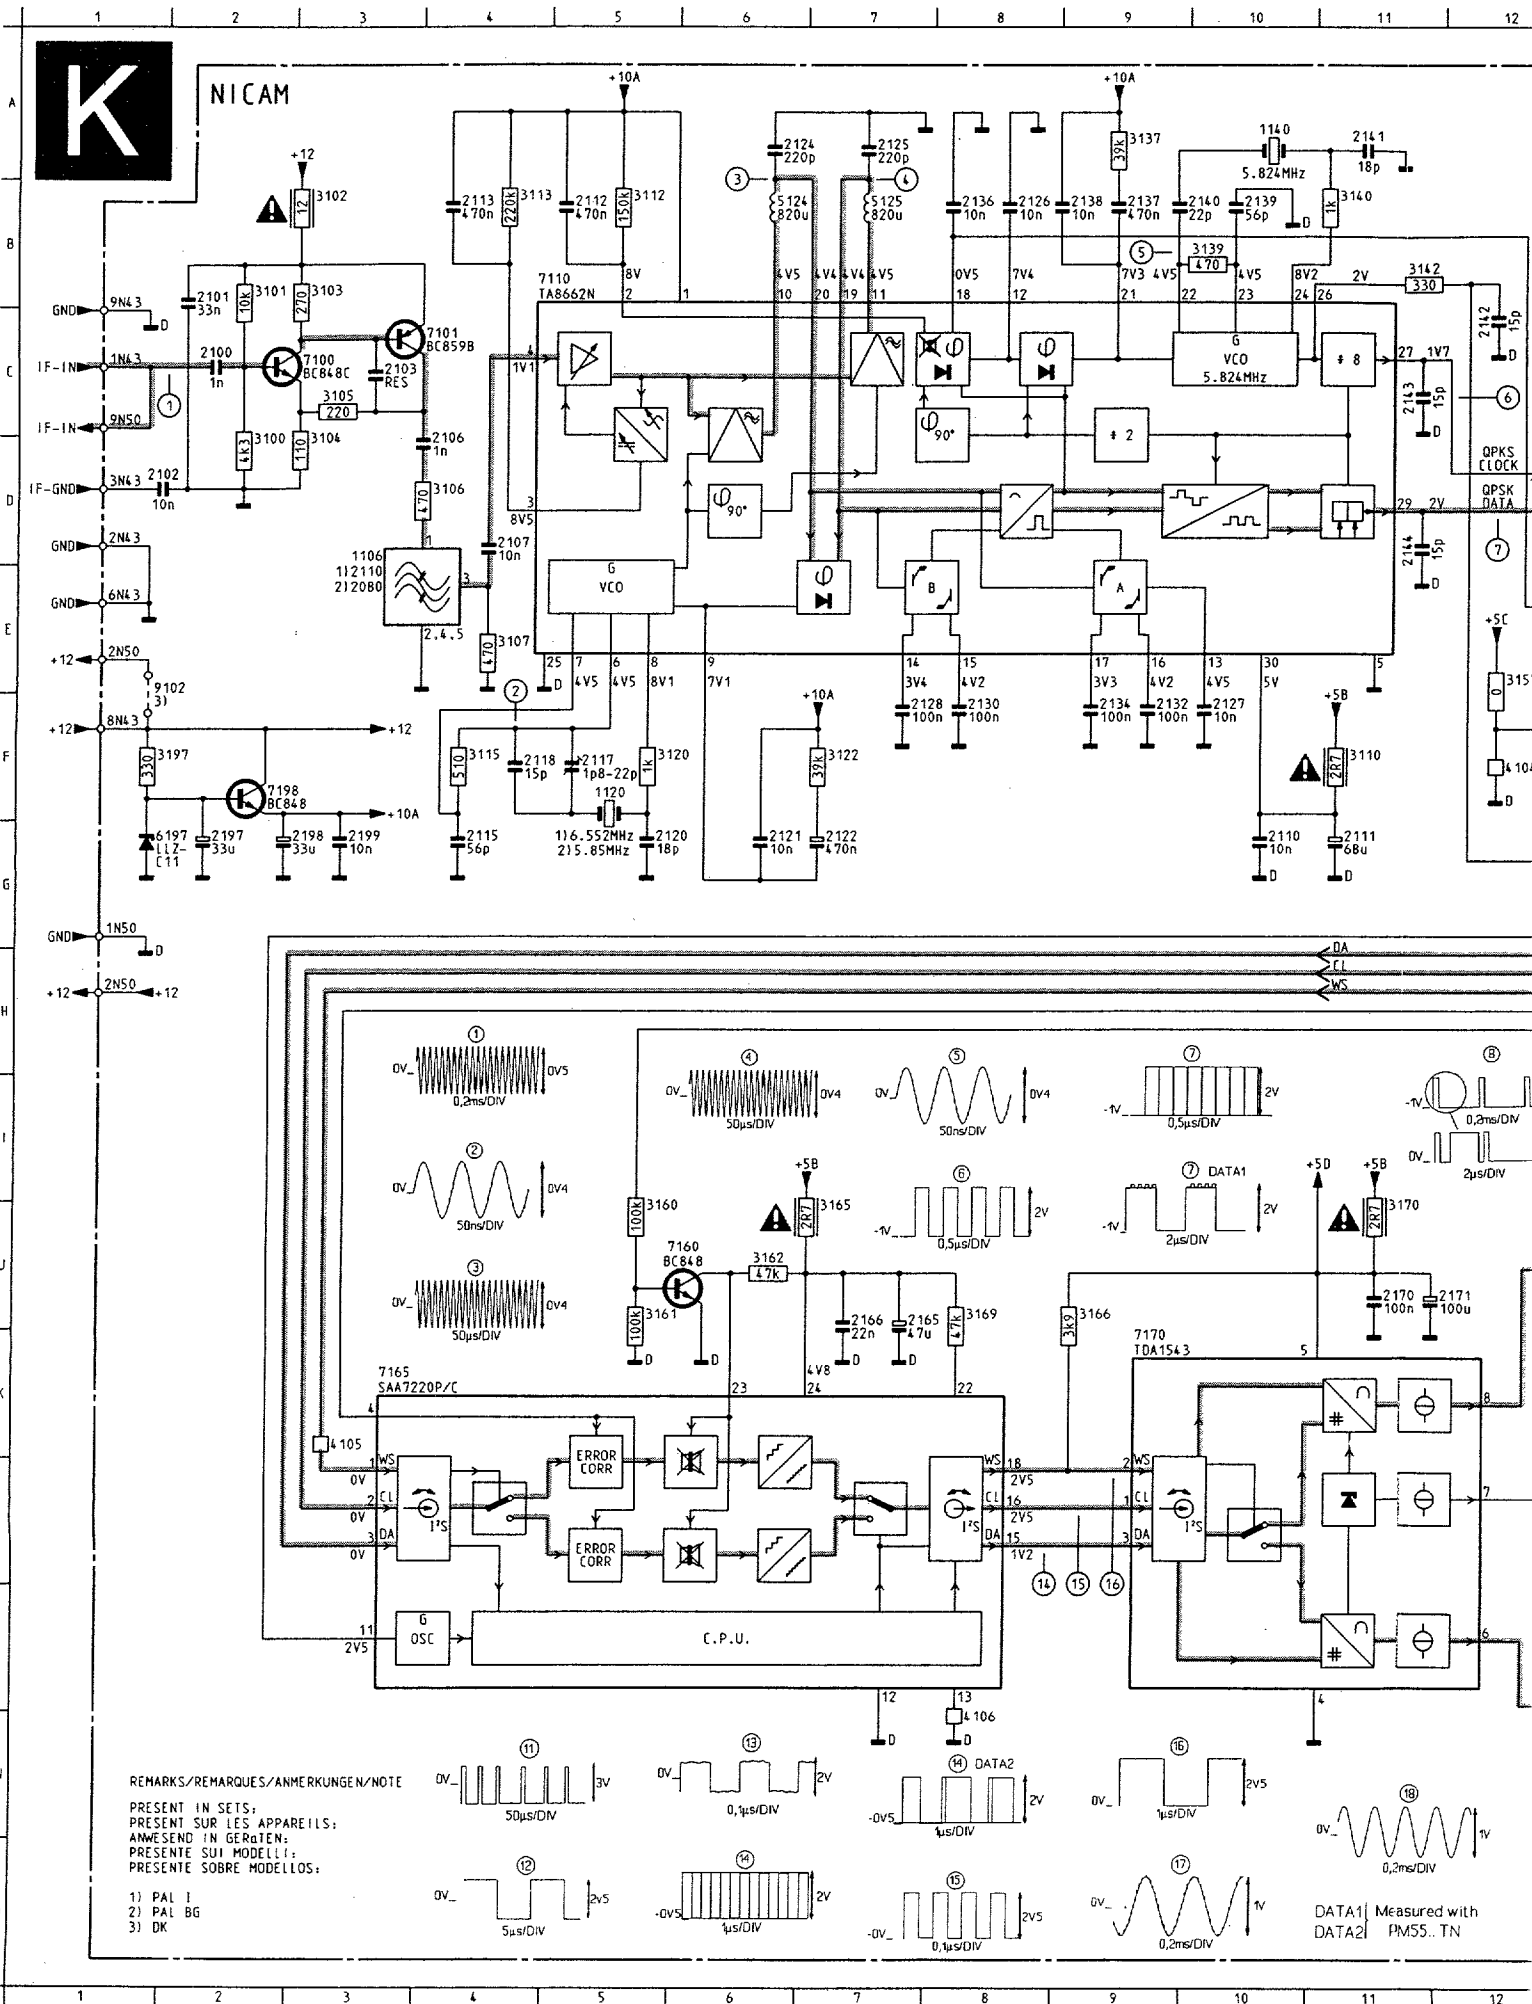





	1106	D 3	4 102	I 20
	1120	F 5	4 103	B 14
	1140	A 10	4 104	F 12
	2100	C 2	4 105	K 3
A	2101	B 2	4 106	N 8
	2102	D 1	4 107	J 17
	2103	C 3	4 108	O 16
	2106	D 4	5 124	B 6
	2107	D 4	5 125	B 7
	2110	G 10	5 155	G 17
	2111	G 11	5 160	G 18
B	2112	B 5	6 154	G 15
	2113	B 4	6 197	G 1
	2115	G 4	7 100	C 3
	2117	F 5	7 101	C 4
	2118	F 4	7 110	B 4
	2120	G 5	7 145	A 16
	2121	G 6	7 150	C 12
	2122	G 7	7 160	J 16
C	2124	A 6	7 165	K 3
	2125	A 7	7 170	K 9
	2126	B 8	7 175	J 16
	2127	F 10	7 185	M 16
	2128	F 7	7 195	J 17
	2130	F 8	7 198	F 2
	2132	F 9	9 102	F 1
	2134	F 9		
D	2136	B 8		
	2137	B 8		
	2138	B 9		
	2139	B 9		
	2140	B 9		
	2141	A 11		
	2142	C 12		
E	2143	C 11		
	2144	D 11		
	2145	B 19		
	2150	C 14		
	2152	G 15		
	2153	G 16		
	2154	G 16		
F	2155	G 16		
	2156	G 17		
	2158	G 17		
	2159	G 18		
	2165	J 7		
	2166	J 7		
	2170	J 11		
	2171	J 12		
	2175	K 13		
G	2176	K 14		
	2177	I 13		
	2178	H 14		
	2179	I 15		
	2180	I 15		
	2181	I 14		
H	2182	J 16		
	2185	O 13		
	2186	O 14		
	2187	L 13		
	2188	L 14		
	2189	L 15		
	2190	L 15		
	2191	O 14		
I	2192	M 16		
	2197	G 2		
	2198	G 2		
	2199	G 3		
	3100	C 2		
	3101	B 2		
J	3102	B 3		
	3103	B 3		
	3104	C 3		
	3105	C 3		
	3106	D 4		
	3107	E 4		
	3110	F 11		
	3112	B 5		
	3113	B 4		
K	3115	F 4		
	3120	F 5		
	3122	F 7		
	3137	A 9		
	3139	B 10		
	3140	B 11		
	3142	B 11		
L	3145	A 19		
	3146	B 19		
	3147	C 19		
	3150	B 14		
	3152	G 15		
	3153	G 15		
	3156	B 14		
	3157	E 12		
M	3160	I 5		
	3161	J 5		
	3162	J 6		
	3165	I 7		
	3166	J 8		
	3169	J 9		
	3170	I 11		
	3175	K 13		
N	3177	I 13		
	3178	H 13		
	3179	H 14		
	3180	I 14		
	3182	J 16		
	3184	O 13		
	3185	N 13		
	3187	M 13		
O	3188	I 13		
	3189	I 14		
	3190	I 14		
	3192	N 16		

CHASSIS FL1.2


CL 16532023/020, KREF
270691

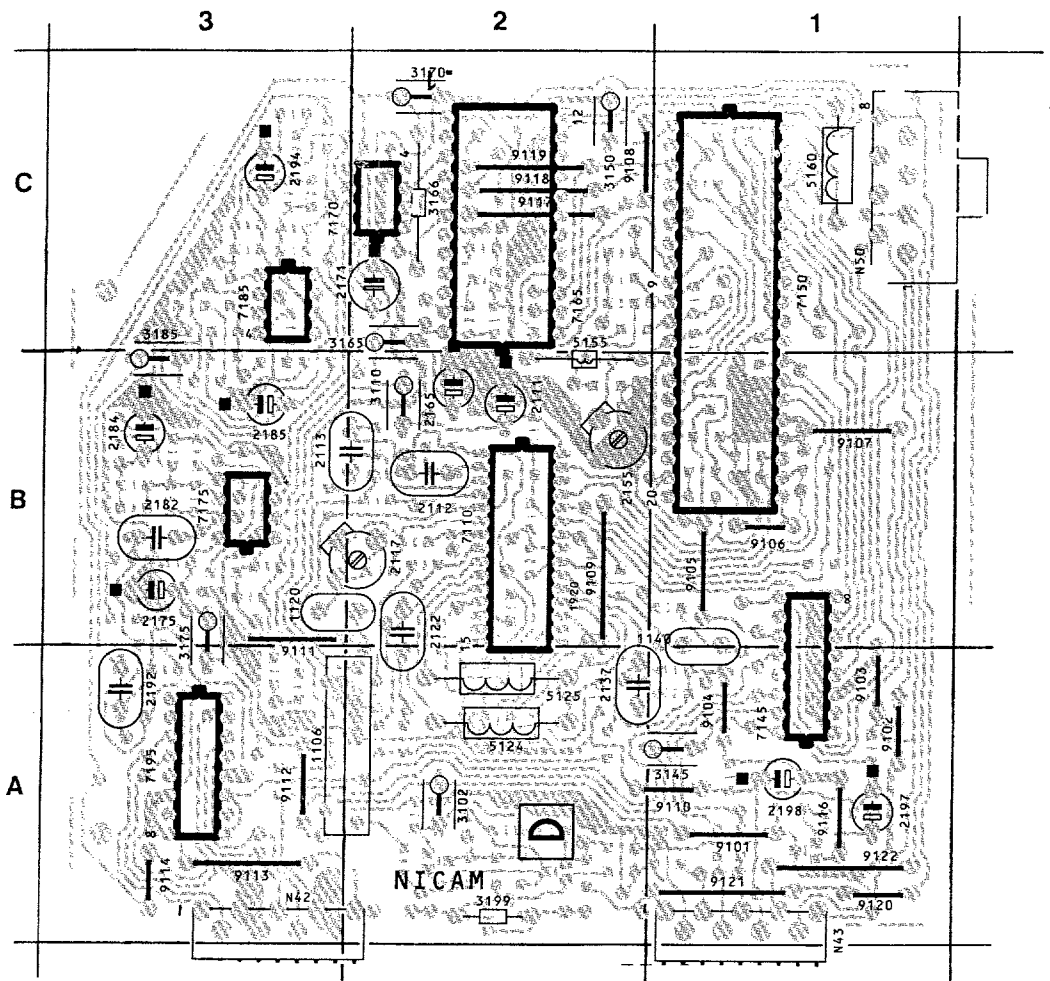


1106 A2	2120 A2	2141 B2	2171 C2	2190 B3	3106 A2	3152 C2	3182 B3	4101 A3	6197 A1	9104 A1	9121 A1
1120 B3	2121 A2	2142 C1	2175 B3	2191 C3	3107 B3	3153 C2	3183 B3	4102 A3	7100 A2	9105 B1	9122 A1
1140 B1	2122 B2	2143 B1	2176 B3	2192 A3	3110 B2	3156 B1	3184 B3	4103 B1	7101 A2	9106 B1	N42 A2
2100 A2	2124 A2	2144 B1	2177 B3	2193 C3	3112 B2	3157 B1	3185 B3	4104 B1	7110 B2	9107 B1	N43 A1
2101 A2	2125 A2	2145 A1	2178 A3	2194 C3	3113 B2	3160 C2	3186 B3	4105 C1	7145 A1	9108 C2	N50 C1
2102 A1	2126 B2	2150 C1	2179 B3	2195 B3	3115 B2	3161 C2	3187 C3	4106 C2	7150 C1	9109 B2	
2103 A2	2127 B2	2152 C2	2180 B3	2196 C3	3120 B2	3162 C2	3188 C3	4107 C3	7160 C2	9110 A1	
2106 A2	2128 A2	2153 C1	2181 B3	2197 A1	3122 A2	3165 C2	3189 C3	4108 C3	7165 C2	9111 B3	
2107 B2	2130 A2	2154 B2	2182 B3	2198 A1	3137 A1	3166 C2	3190 B3	4109 B3	7170 C2	9112 A3	
2110 B2	2132 A2	2155 B2	2183 B3	2199 A1	3139 B2	3170 C2	3191 C3	4110 A2	7175 B3	9113 A3	
2111 B2	2134 A2	2156 C2	2184 B3	3100 A2	3140 B2	3175 B3	3192 A3	4111 B2	7185 C3	9114 A3	
2112 B2	2136 A2	2158 C1	2185 B3	3101 A2	3142 B1	3177 B3	3193 C3	5124 A2	7195 A3	9116 A1	
2113 B2	2137 A2	2159 C1	2186 B3	3102 A2	3145 A1	3178 A3	3196 C3	5125 A2	7198 A1	9117 C2	
2115 B2	2138 A1	2165 B2	2187 C3	3103 A2	3146 A1	3179 B3	3197 A1	5155 B2	9101 A1	9118 C2	
2117 B3	2139 B2	2166 C2	2188 C3	3104 A2	3147 A1	3180 B3	3198 A2	5160 C1	9102 A1	9119 C2	
2118 B2	2140 B1	2170 C2	2189 C3	3105 A2	3150 C2	3181 B3	3199 A2	6154 B2	9103 A1	9120 A1	

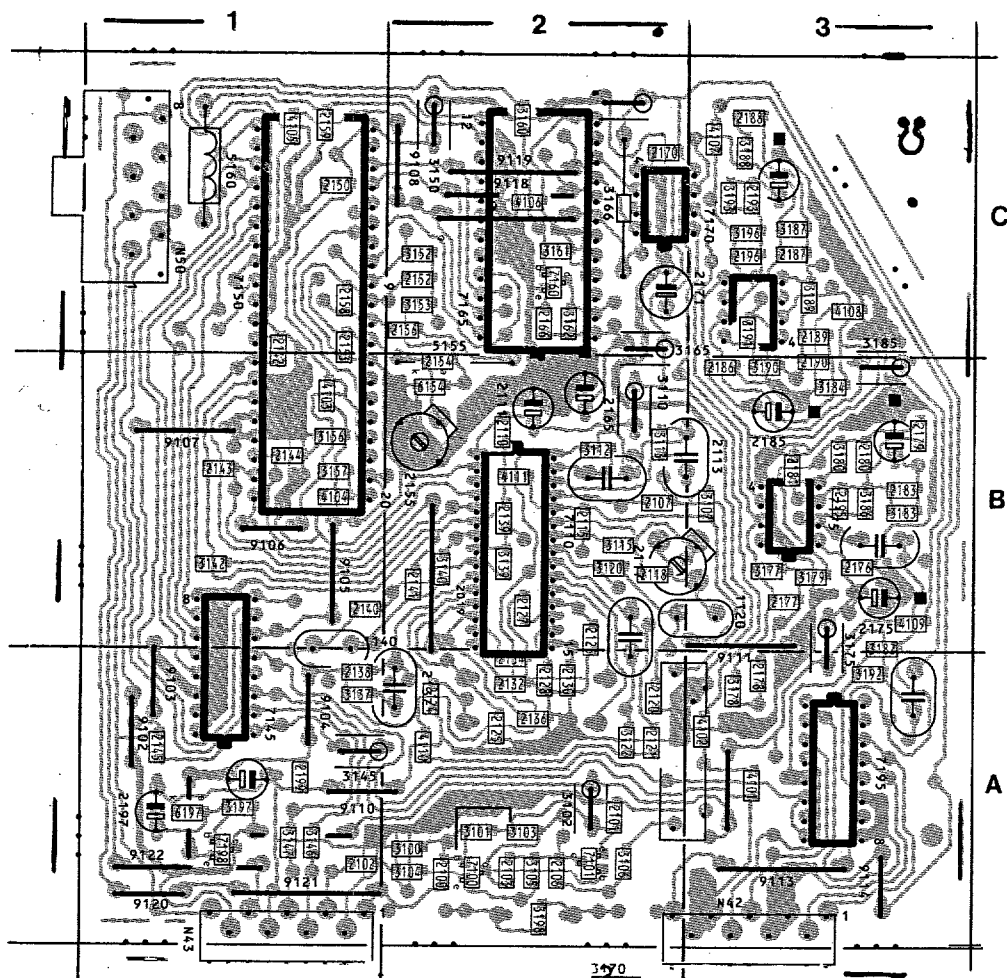


1106 A2	2120 A2	2141 B2	2171 C2	2190 B3	3106 A2	3152 C2	3182 B3	4101 A3	6197 A1	9104 A1	9121 A1
1120 B3	2121 A2	2142 C1	2175 B3	2191 C3	3107 B3	3153 C2	3183 B3	4102 A3	7100 A2	9105 B1	9122 A2
1140 B1	2122 B2	2143 B1	2176 B3	2192 A3	3110 B2	3156 B1	3184 B3	4103 B1	7101 A2	9106 B1	N42 A2
2100 A2	2124 A2	2144 B1	2177 B3	2193 C3	3112 B2	3157 B1	3185 B3	4104 B1	7110 B2	9107 B1	N43 A1
2101 A2	2125 A2	2145 A1	2178 A3	2194 C3	3113 B2	3160 C2	3186 B3	4105 C1	7145 A1	9108 C2	N50 C1
2102 A1	2126 B2	2150 C1	2179 B3	2195 B3	3115 B2	3161 C2	3187 C3	4106 C2	7150 C1	9109 B2	
2103 A2	2127 B2	2152 C2	2180 B3	2196 C3	3120 B2	3162 C2	3188 C3	4107 C3	7160 C2	9110 A1	
2106 A2	2128 A2	2153 C1	2181 B3	2197 A1	3122 A2	3165 C2	3189 C3	4108 C3	7165 C2	9111 B3	
2107 B2	2130 A2	2154 B2	2182 B3	2198 A1	3137 A1	3166 C2	3190 B3	4109 B3	7170 C2	9112 A3	
2110 B2	2132 A2	2155 B2	2183 B3	2199 A1	3139 B2	3170 C2	3191 C3	4110 A2	7175 B3	9113 A3	
2111 B2	2134 A2	2156 C2	2184 B3	3100 A2	3140 B2	3175 B3	3192 A3	4111 B2	7185 C3	9114 A3	
2112 B2	2136 A2	2158 C1	2185 B3	3101 A2	3142 B1	3177 B3	3193 C3	5124 A2	7195 A3	9116 A1	
2113 B2	2137 A2	2159 C1	2186 B3	3102 A2	3145 A1	3178 A3	3196 C3	5125 A2	7198 A1	9117 C2	
2115 B2	2138 A1	2165 B2	2187 C3	3103 A2	3146 A1	3179 B3	3197 A1	5155 B2	9101 A1	9118 C2	
2117 B3	2139 B2	2166 C2	2188 C3	3104 A2	3147 A1	3180 B3	3198 A2	5160 C1	9102 A1	9119 C2	
2118 B2	2140 B1	2170 C2	2189 C3	3105 A2	3150 C2	3181 B3	3199 A2	6154 B2	9103 A1	9120 A1	

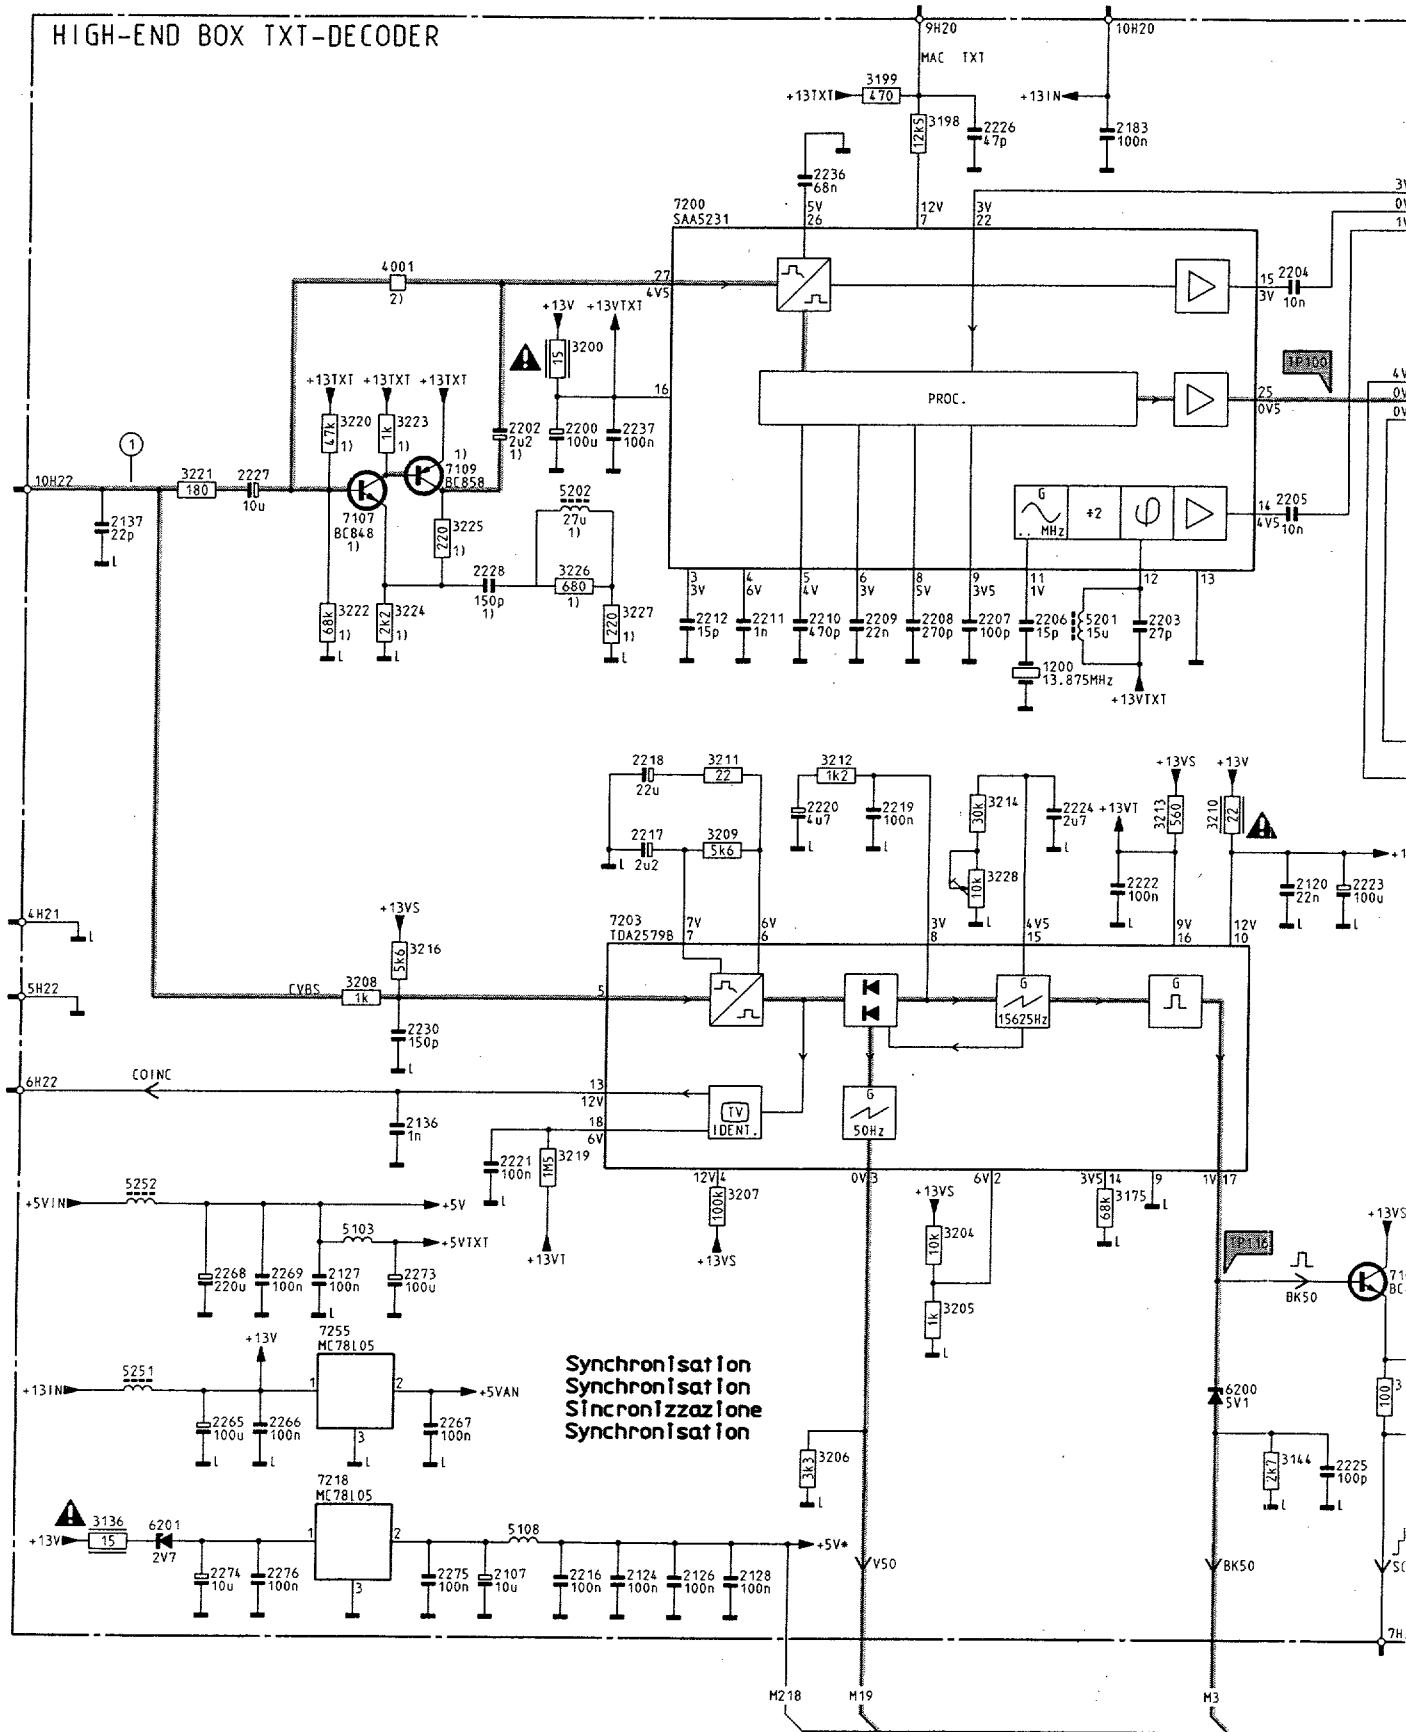

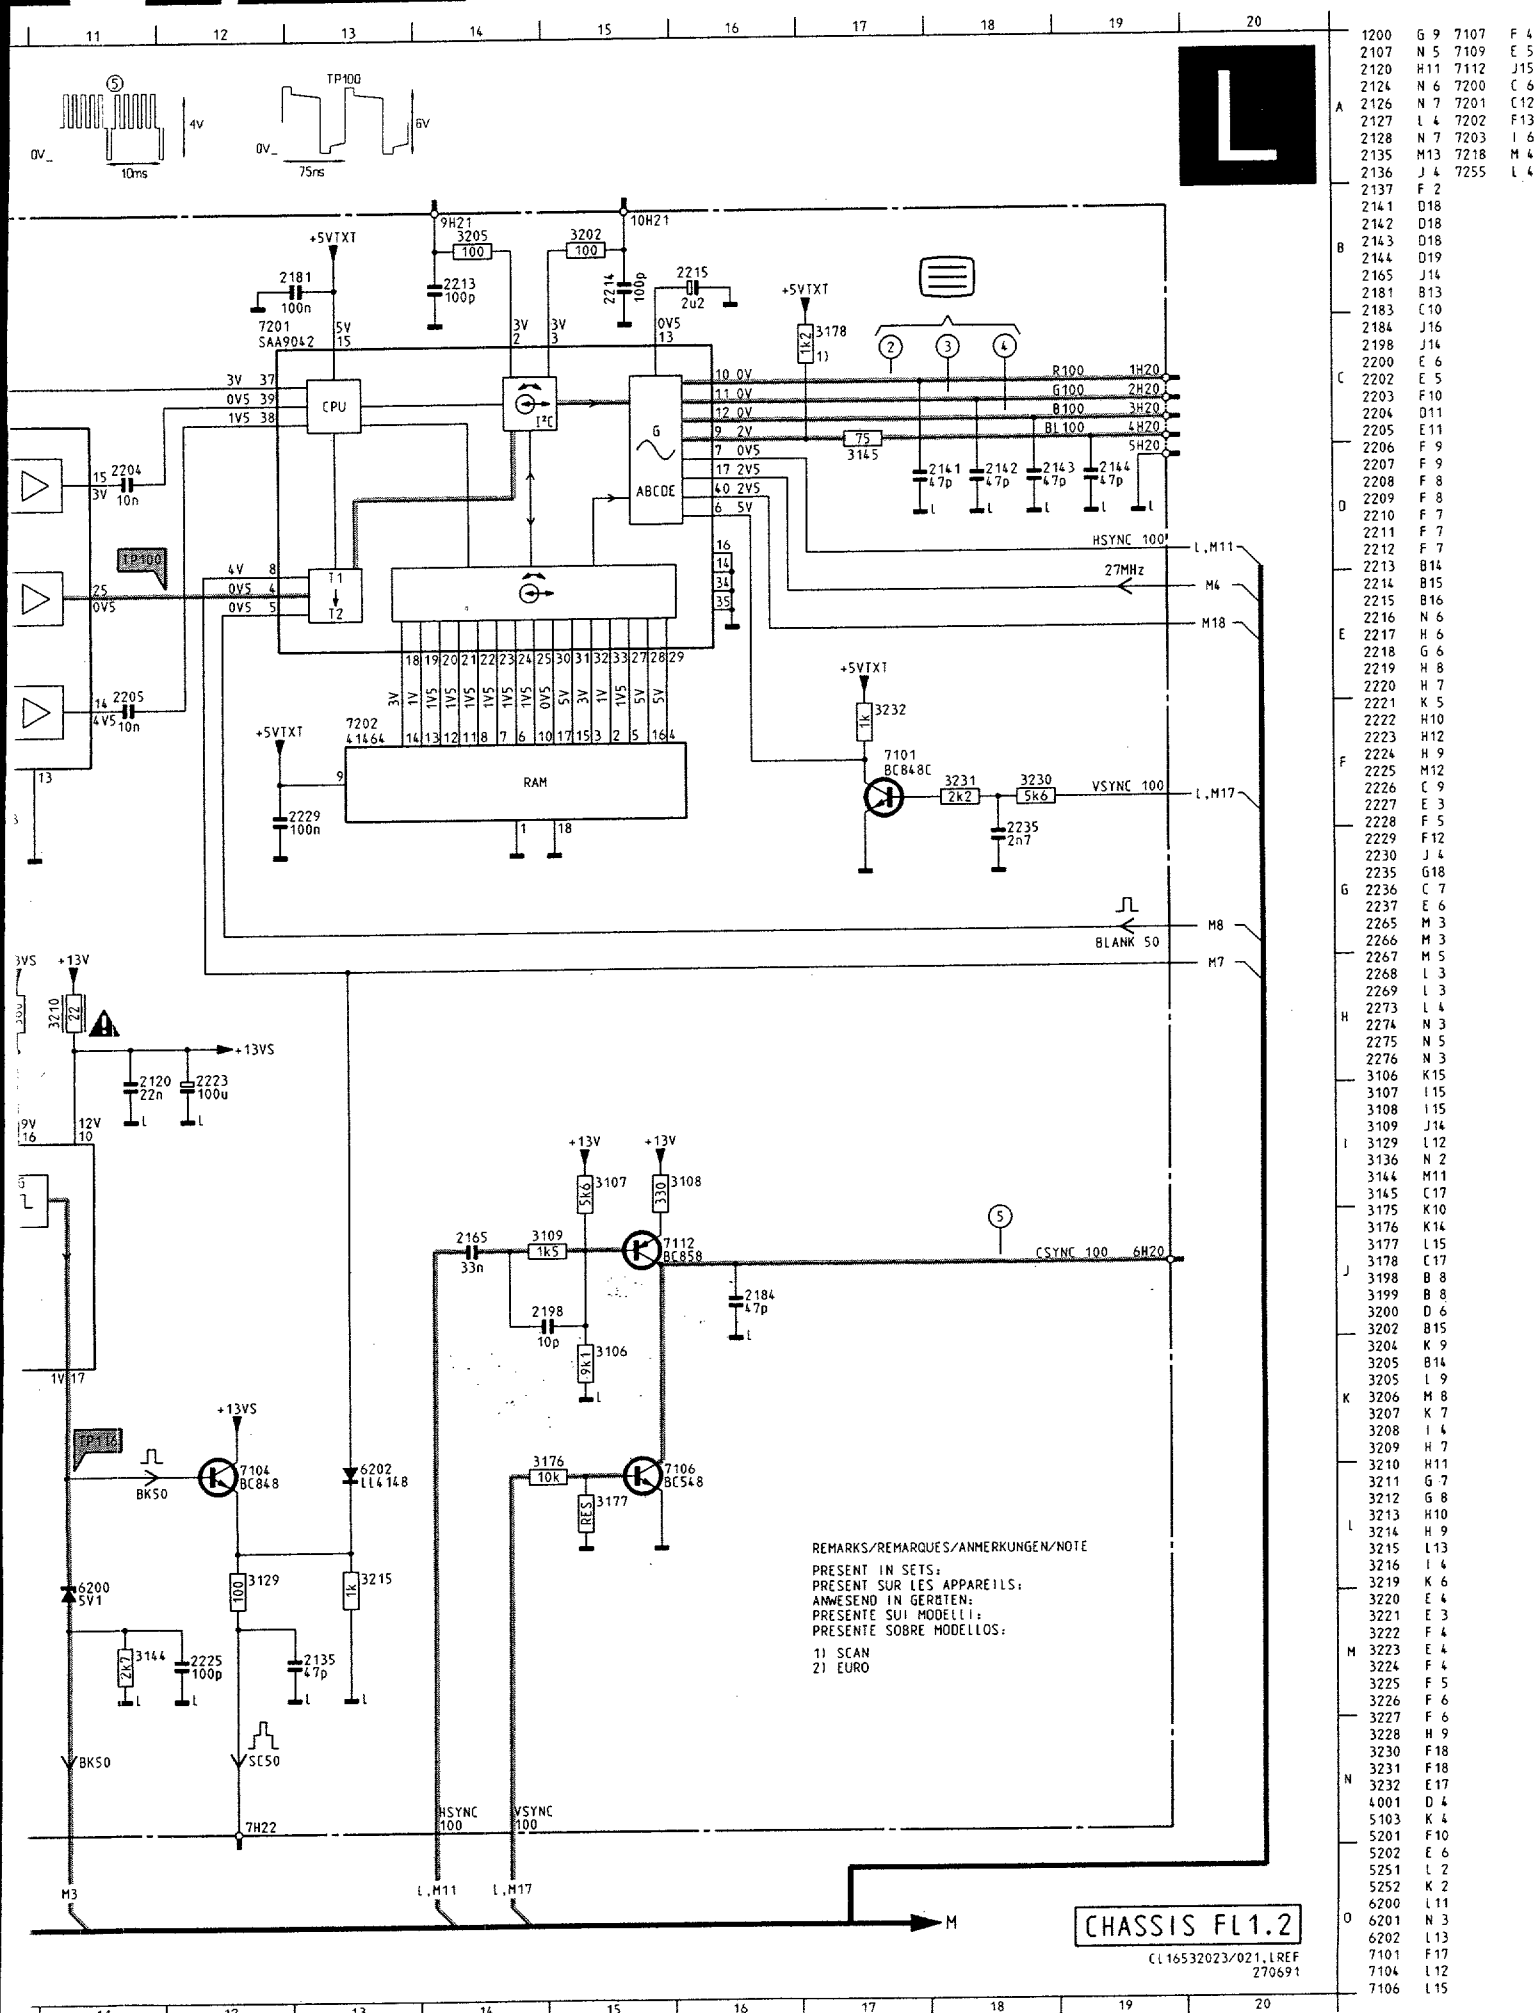



High-end box

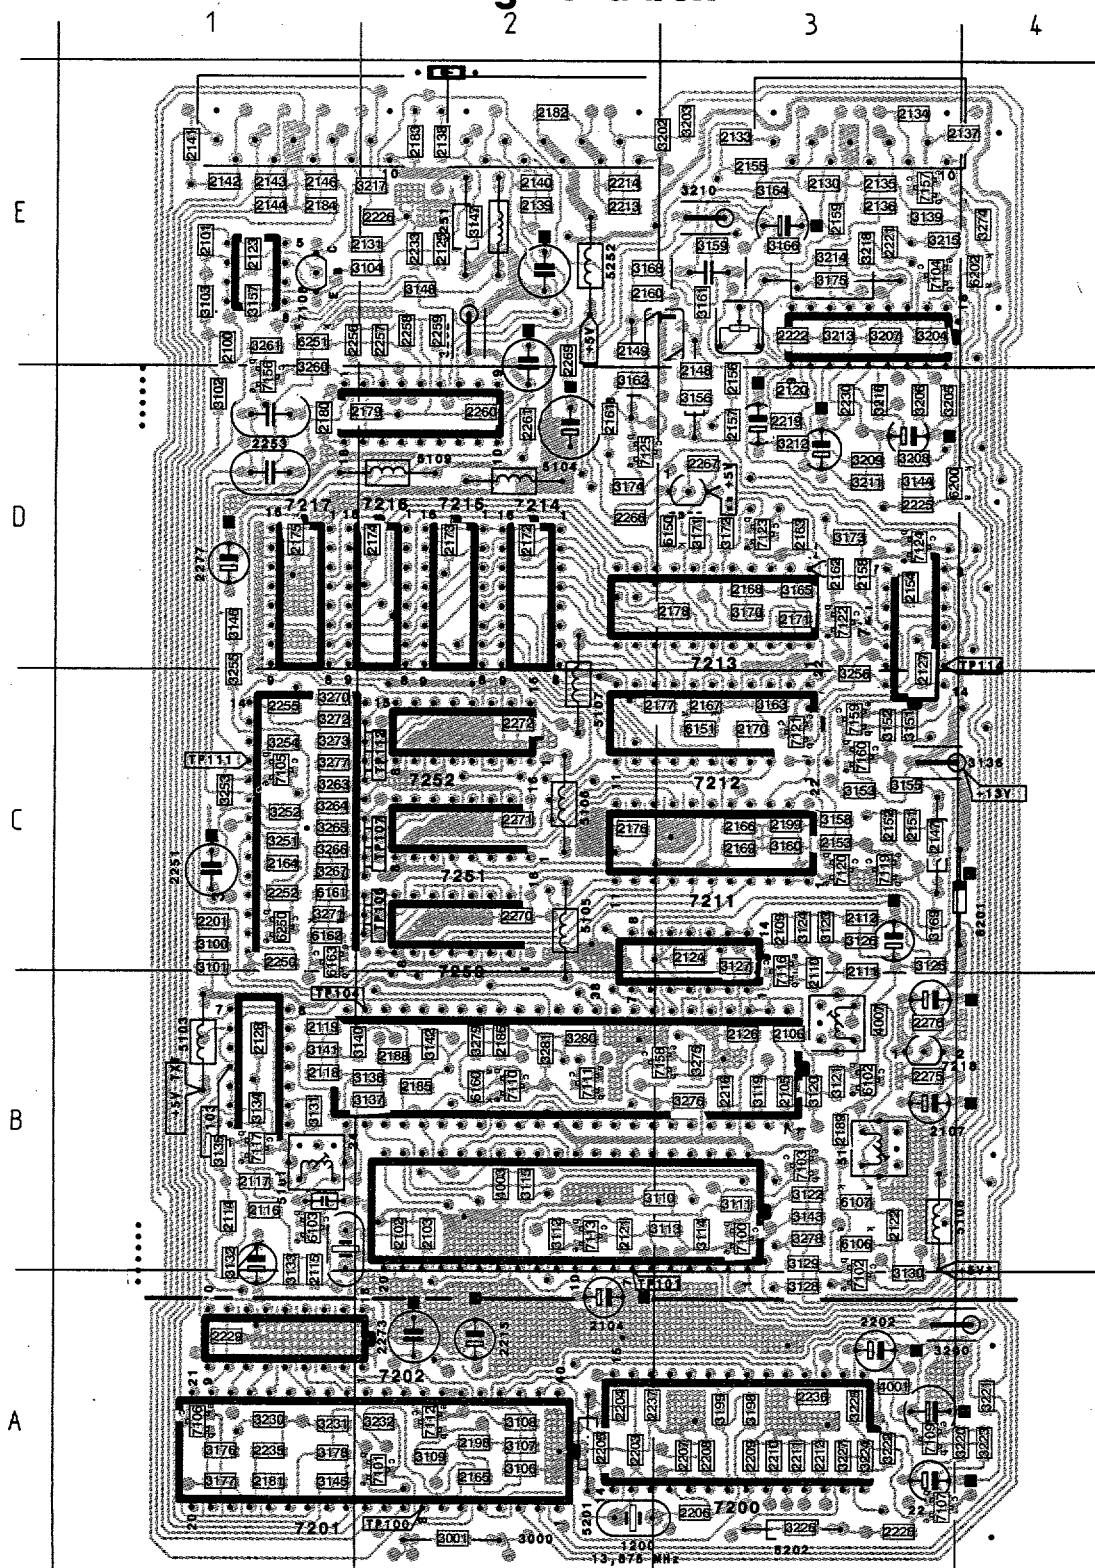




2201 C1	3137 B2	3281 B2
2202 A3	3138 B2	4001 A3
2203 A2	3139 E3	4003 B2
2204 A2	3140 B2	4007 B3
2205 A2	3141 B1	5100 B3
2206 A3	3142 B2	5101 B1
2207 A3	3143 B3	5102 E2
2208 A3	3144 D3	5103 B1
2209 A3	3145 A1	5104 D2
2210 A3	3146 D1	5105 C2
2211 A3	3147 E2	5106 C2
2212 A3	3148 E2	5107 C2
2213 E2	3151 C3	5108 B3
2214 E2	3152 C3	5109 D2
2215 A2	3153 C3	5110 B3
2216 B3	3155 C3	5150 C3
2217 D3	3156 D3	5151 D3
2218 D3	3157 E1	5152 D2
2219 D3	3158 C3	5201 A2
2220 D3	3159 E3	5202 A3
2221 E3	3160 C3	5251 E2
2222 E3	3161 E3	5252 E2
2223 E3	3162 D2	6102 B3
2224 E3	3163 C3	6103 B1
2225 D3	3164 E3	6106 B3
2226 E2	3165 D3	6107 B3
2227 A3	3166 E3	6150 D3
2228 A3	3168 E2	6151 C3
2229 A1	3169 C3	6160 B2
2230 D3	3170 D3	6161 C1
2233 E2	3171 D3	6162 C1
2235 A1	3172 D3	6163 C1
2236 A3	3173 D3	6200 D3
2237 A2	3174 D2	6201 C4
2250 C1	3175 E3	6202 E4
2251 C1	3176 A1	6250 C1
2252 C1	3177 A1	6251 E1
2253 D1	3178 A1	7100 B3
2254 D1	3198 A3	7101 A2
2255 C1	3199 A3	7102 A3
2256 E1	3200 A3	7103 B3
2257 E2	3202 E3	7104 E3
2258 E2	3203 E3	7105 C1
2259 E2	3204 E3	7106 A1
2260 D2	3205 D3	7107 A3
2261 D2	3206 D3	7108 E1
2262 E2	3207 E3	7109 A3
2265 E2	3208 D3	7110 B2
2266 D2	3209 D3	7111 B2
2267 D3	3210 E3	7112 A2
2268 D2	3211 D3	7113 B2
2269 E2	3212 D3	7116 C3
2270 C2	3213 E3	7117 B1
2271 C2	3214 E3	7119 C3
2272 C2	3215 E3	7120 C3
2273 A2	3216 D3	7121 C3
2274 B3	3217 E2	7122 D3
2275 B3	3218 E3	7123 D3
2276 B3	3220 A4	7124 D3
2277 D1	3221 A4	7125 D2
3000 A2	3222 A3	7156 D1
3001 A2	3223 A4	7157 E3
3100 C1	3224 A3	7158 B3
3101 C1	3225 A3	7159 C3
3102 D1	3226 A3	7160 C3
3103 E1	3227 A3	7200 A3
3104 E2	3228 E3	7201 A2
3106 A2	3230 A1	7202 A2
3107 A2	3231 A1	7203 E3
3108 A2	3232 A2	7204 B3
3109 A2	3251 C1	7205 B3
3110 B3	3252 C1	7206 B3
3111 B3	3253 C1	7207 B1
3112 B2	3254 C1	7209 E1
3113 B3	3255 C1	7210 C3
3114 B3	3256 C3	7211 C3
3115 B2	3260 D1	7212 C3
3119 B3	3261 E1	7213 D3
3120 B3	3262 E2	7214 D2
3121 B3	3263 C1	7215 D2
3122 B3	3264 C1	7216 D2
3123 C3	3265 C1	7217 D1
3124 C3	3266 C1	7218 B3
3125 C3	3267 C1	7250 C2
3126 C3	3270 C1	7251 C2
3127 C3	3271 C1	7252 C2
3128 A3	3272 C1	7253 C1
3129 B3	3273 C1	7254 D1
3130 A3	3274 E4	7255 D3
3131 B1	3275 B3	
3132 B1	3276 B3	
3133 B1	3277 C1	
3134 B1	3278 B3	
3135 B1	3279 B2	
3136 C3	3280 B2	

H20 E1	2110 B3	2131 E2	2153 C3	2173 D2
H21 E2	2111 C3	2133 E3	2154 D3	2174 D2
H22 E3	2112 C3	2134 E3	2155 E3	2175 D1
1100 B1	2113 B1	2135 E3	2156 D3	2176 C2
1200 A2	2114 B1	2136 E3	2157 D3	2177 C3
2100 E1	2115 B1	2137 E4	2158 D3	2178 D3
2101 E1	2116 B1	2138 E2	2159 E3	2179 D2
2102 B2	2117 B1	2139 E2	2160 E2	2180 D1
2103 B2	2118 B1	2140 E2	2161 D2	2181 A1
2104 A2	2119 B1	2141 E1	2162 D3	2182 E2
2105 B3	2120 D3	2142 E1	2163 D3	2183 E2
2106 B3	2121 B2	2143 E1	2164 C1	2184 E1
2107 B3	2122 B3	2144 E1	2165 A2	2185 B2
2108 C3	2123 E1	2146 E1	2166 C3	2186 B2
2109 C3	2124 C3	2147 C3	2167 C3	2187 B1
	2125 E2	2148 D3	2168 D3	2188 B2
	2126 B3	2149 E2	2169 C3	2189 B3
	2127 C3	2150 E3	2170 C3	2198 A2
	2128 B1	2151 C3	2171 D3	2199 C3
	2130 E3	2152 C3	2172 D2	2200 A3

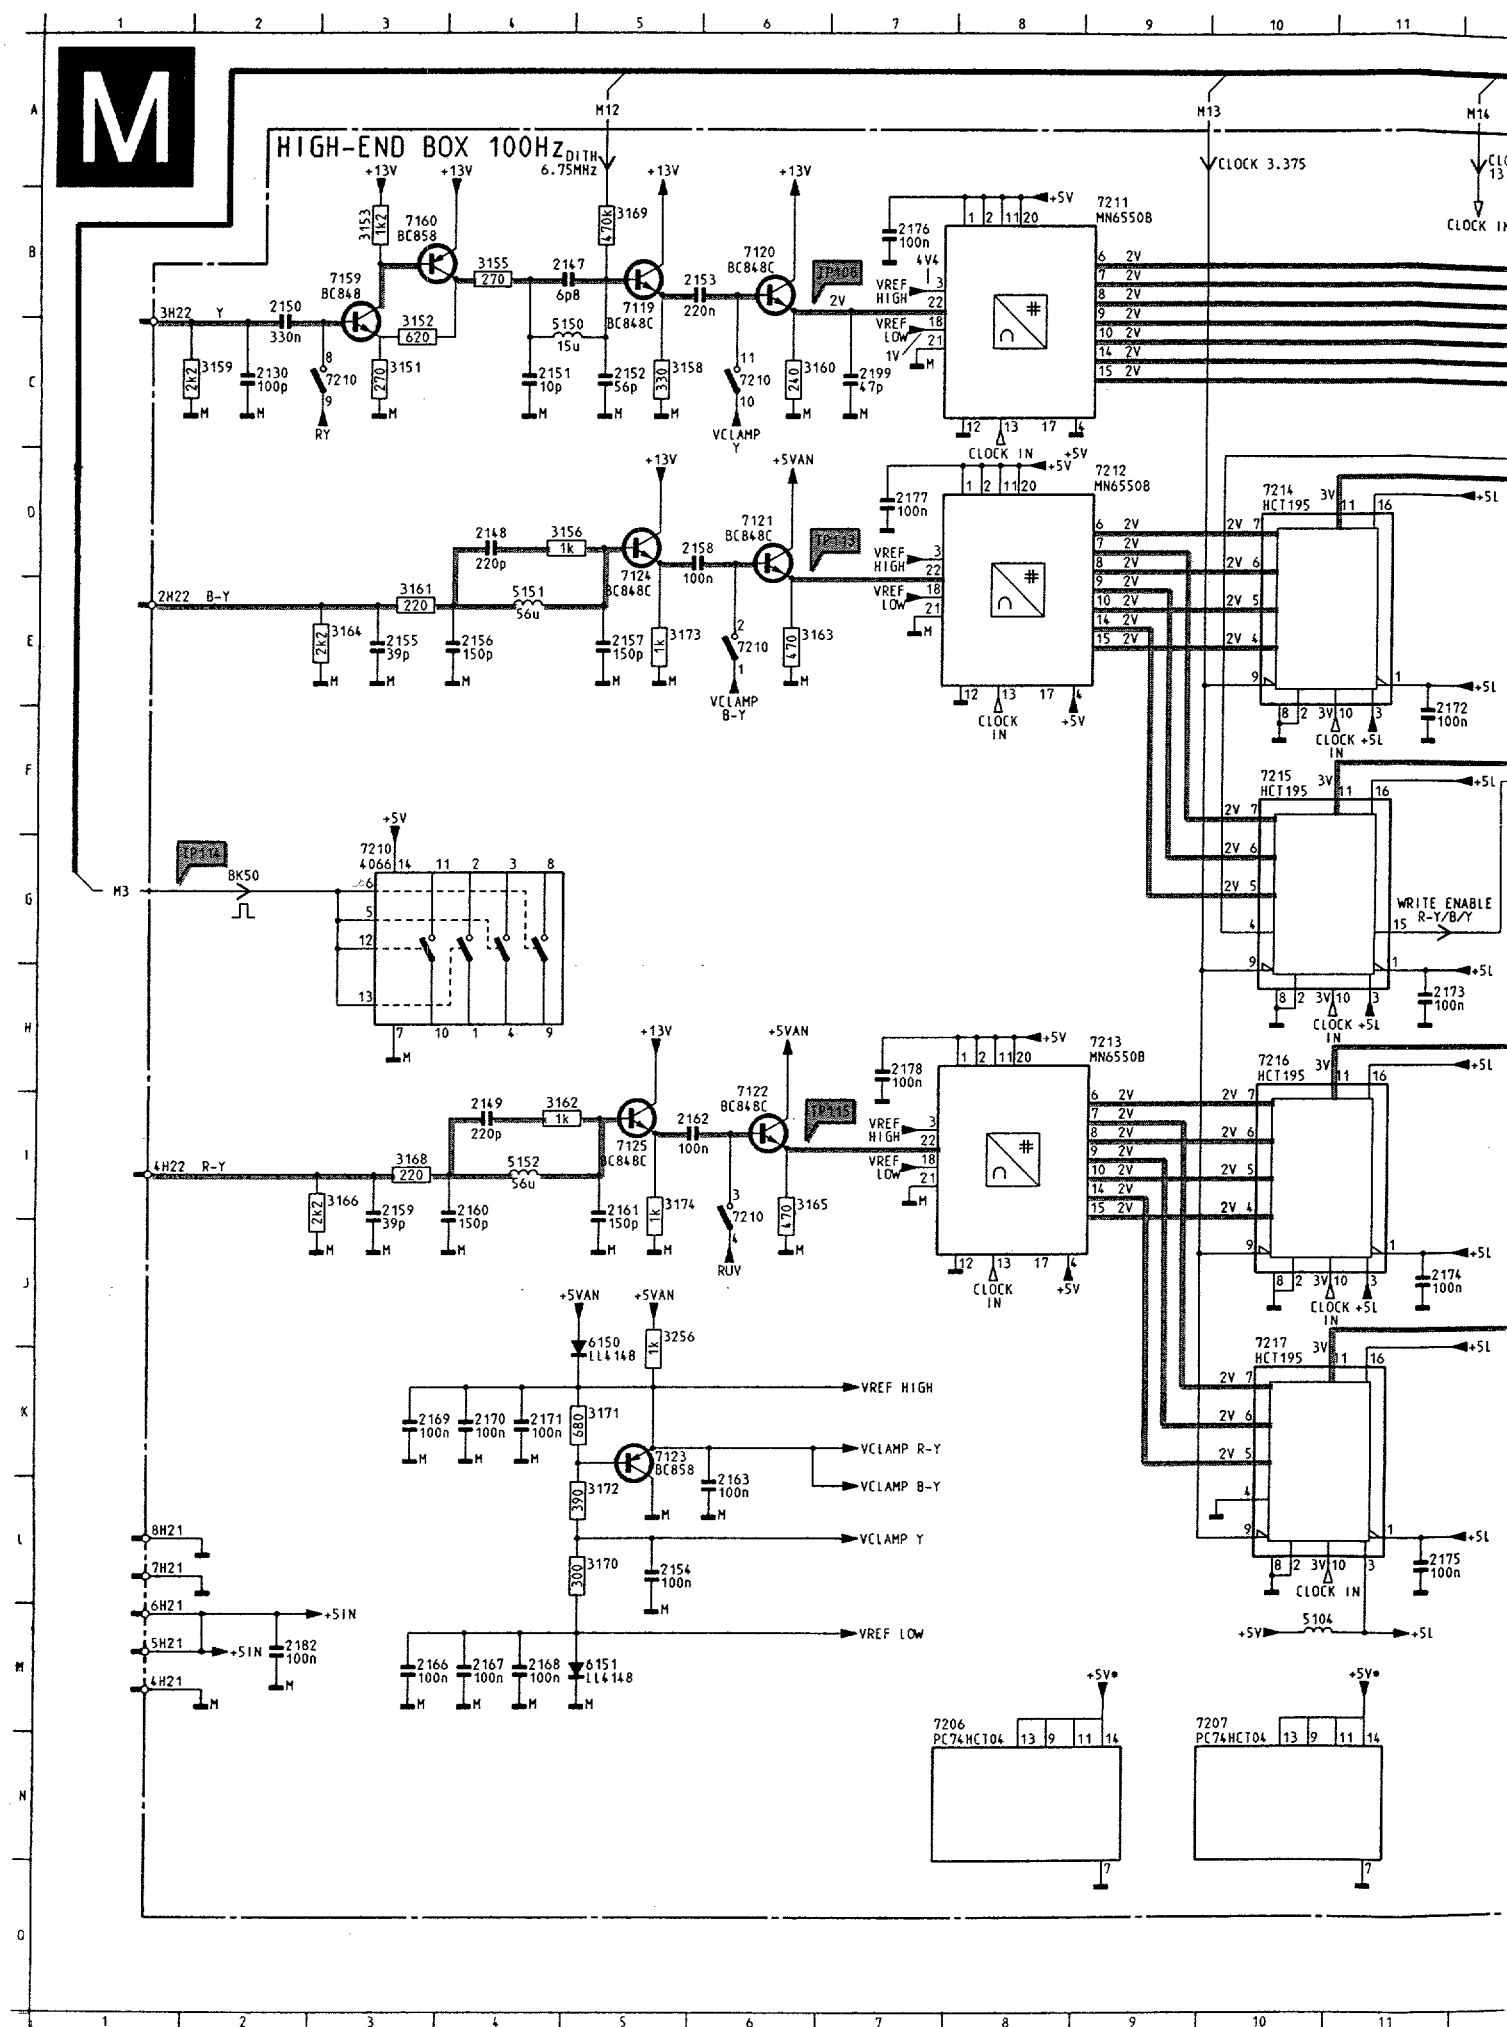

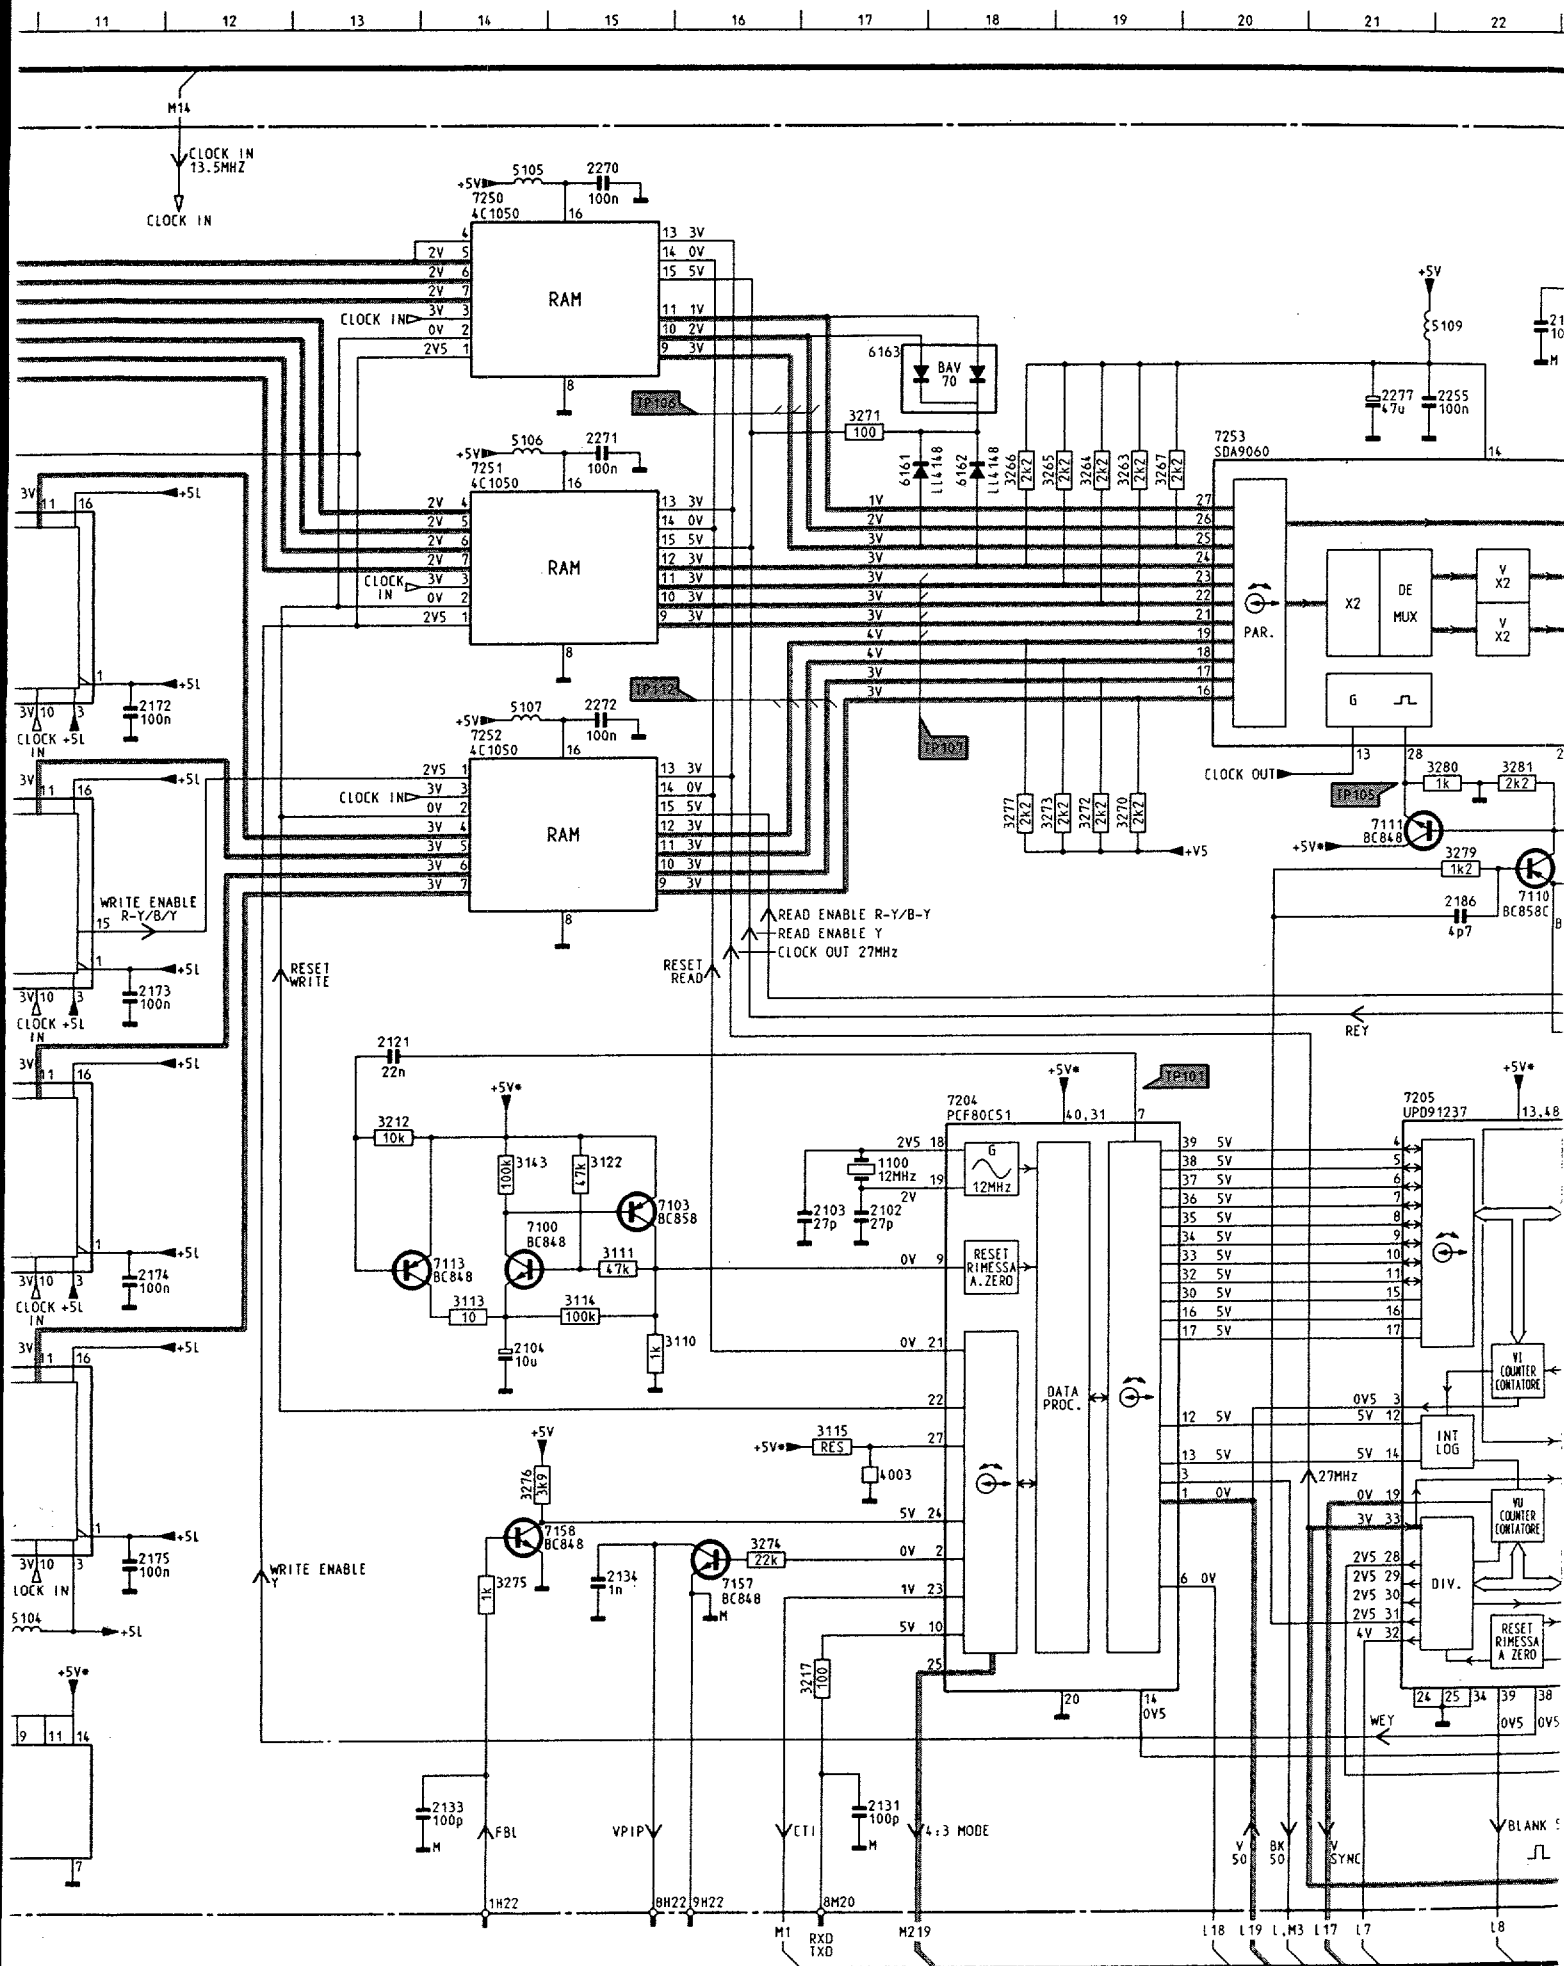

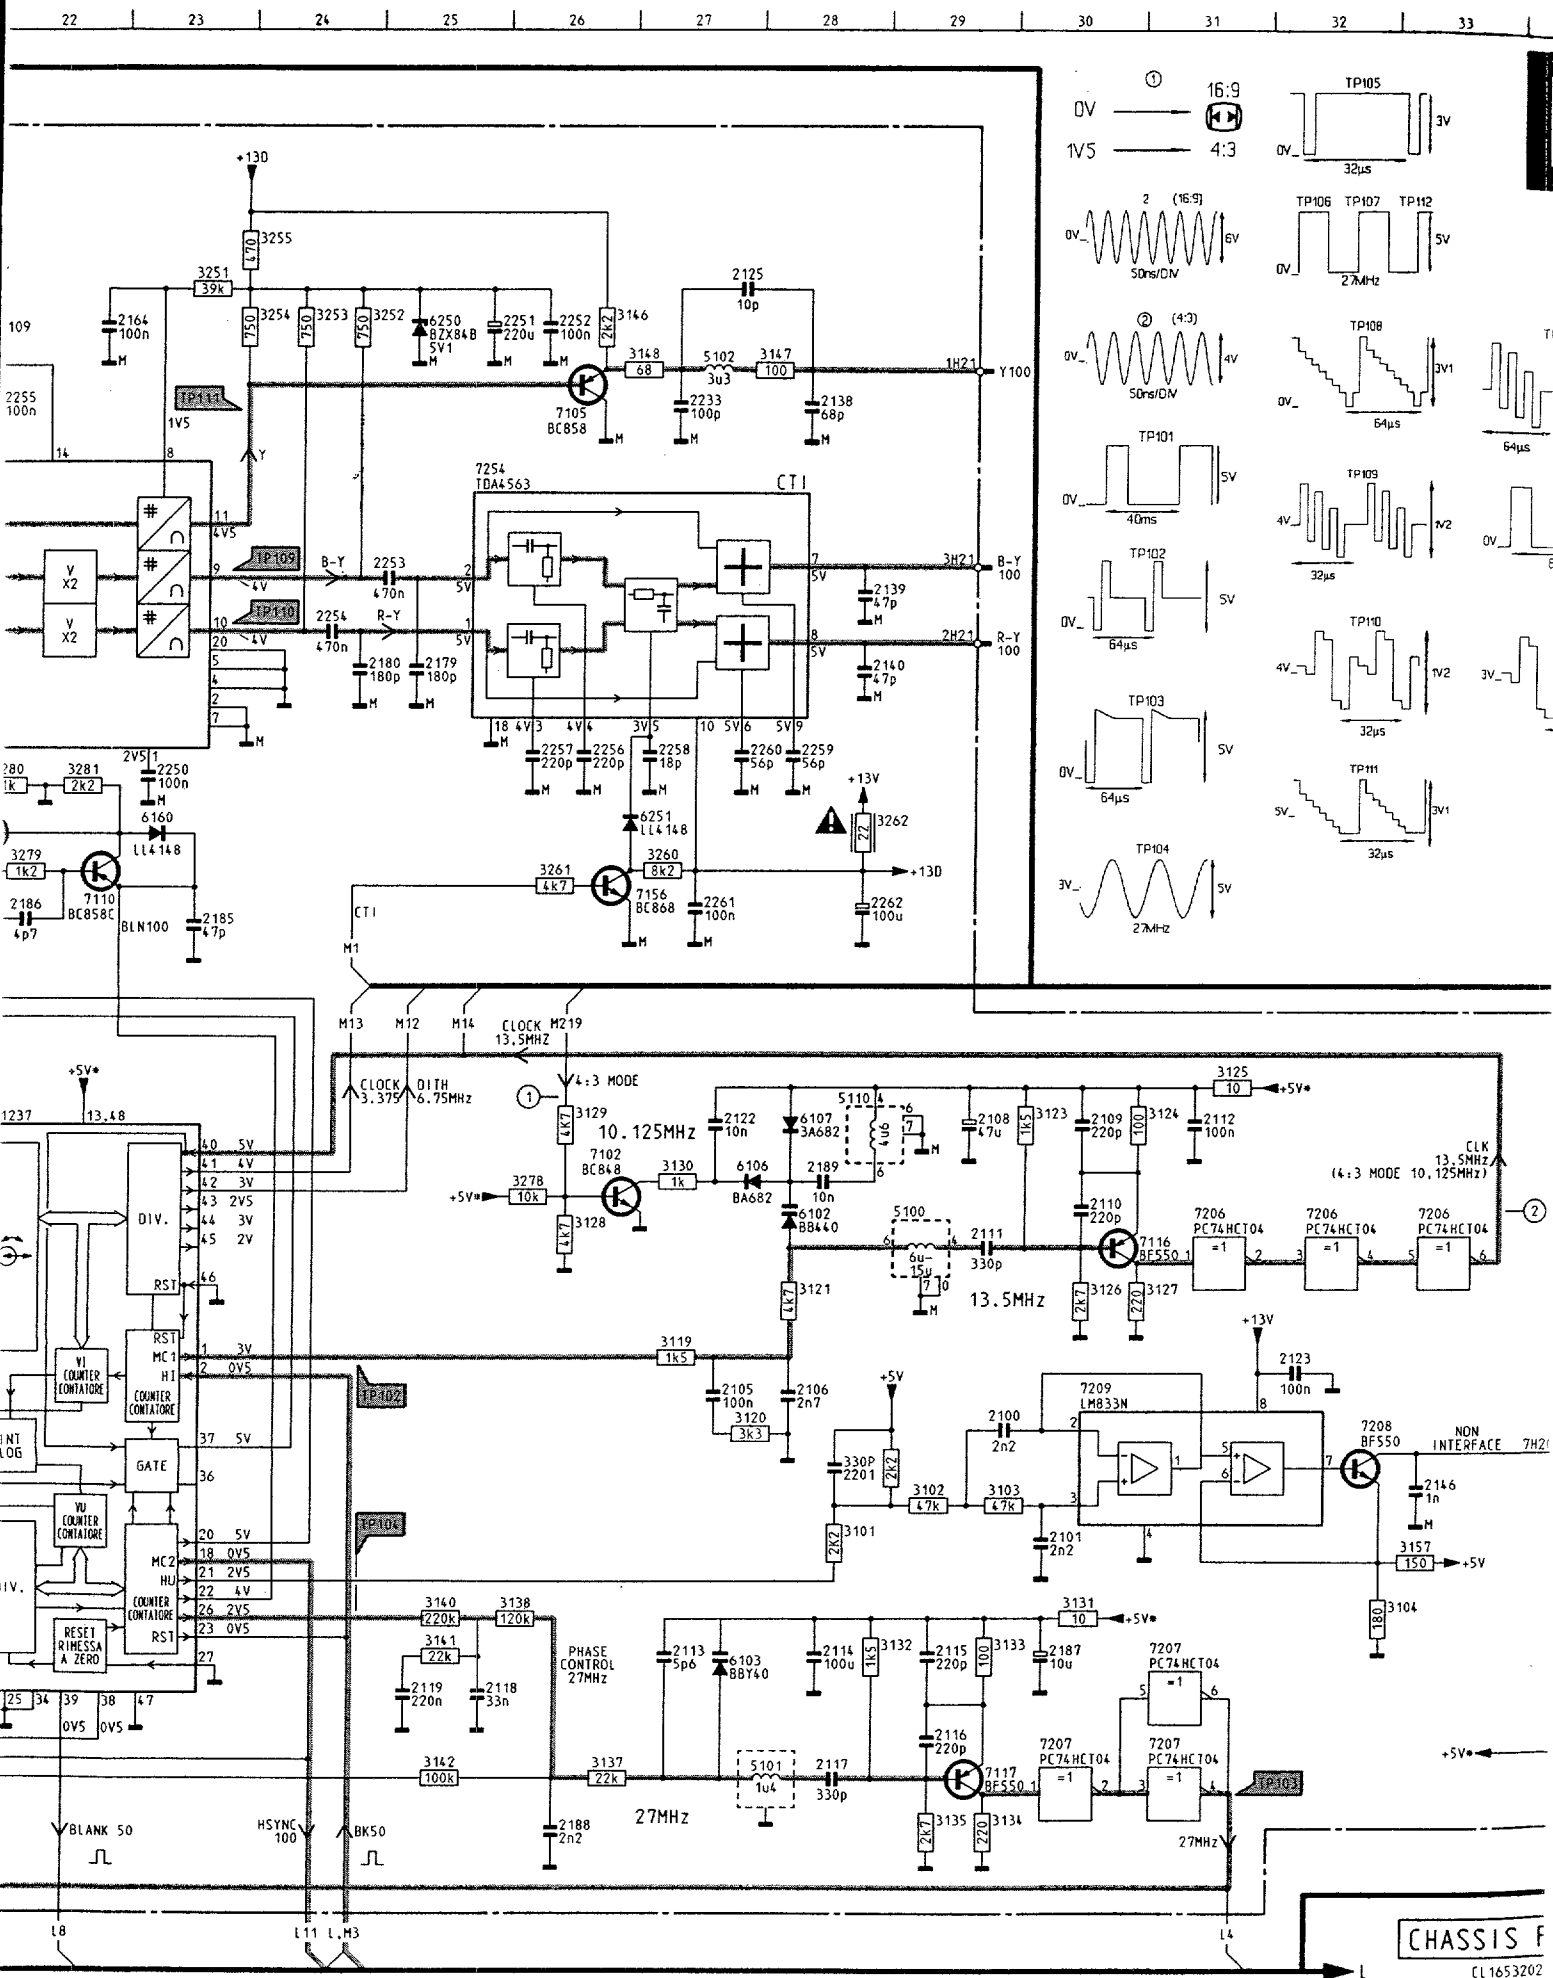

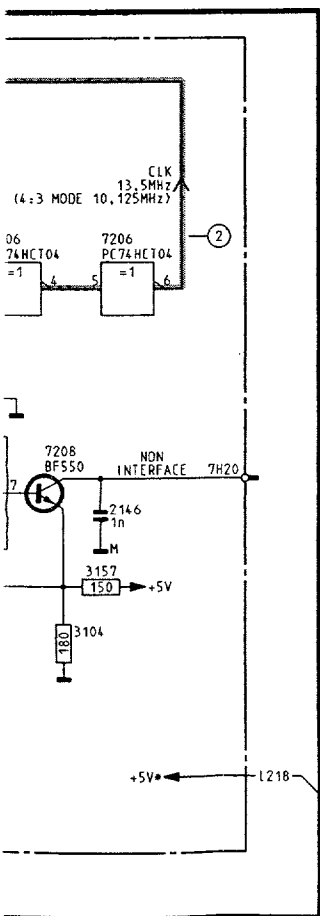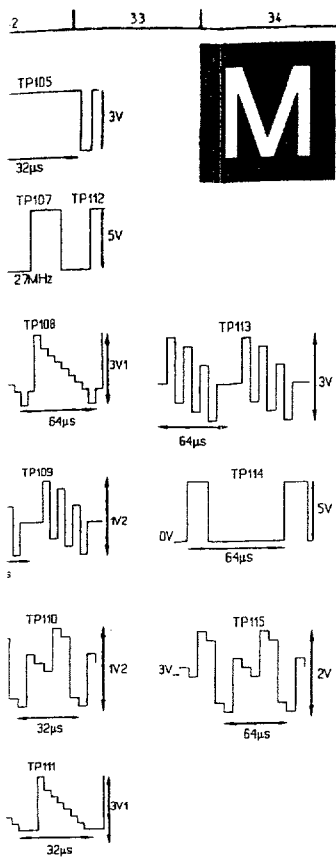

CHASSIS FL1.2

C1 16532023/022.MREF
270691

1100	I17	3135	N29	7208	K32
2100	K29	3137	N26	7209	K30
2101	L30	3138	M26	7210	C 3
2102	J17	3140	M25	7210	C 6
2103	J17	3141	M25	7210	E 6
2104	K14	3142	M25	7210	I 6
2105	K27	3143	I14	7210	G 3
2106	K28	3146	B26	7211	B 9
2108	I29	3147	C28	7212	O 9
2109	I30	3148	C27	7213	H 9
2110	I30	3151	C 3	7214	D10
2111	J29	3152	C 3	7215	F10
2112	I31	3153	B 3	7216	H10
2113	M27	3155	B 4	7217	K10
2114	M28	3156	D 4	7250	B14
2115	M29	3157	L33	7251	D14
2116	N29	3158	C 5	7252	F14
2117	N28	3159	C 2	7253	D20
2118	M25	3160	C 6	7254	D25
2119	M25	3161	E 3		
2121	H13	3162	I 4		
2122	I27	3163	E 6		
2123	K32	3164	E 3		
2125	B27	3165	I 6		
2130	C 2	3166	I 3		
2131	N17	3168	I 3		
2133	N14	3169	B 5		
2134	L15	3170	L 5		
2138	C28	3171	K 5		
2139	E28	3172	L 5		
2140	E28	3173	E 5		
2146	L33	3174	I 5		
2147	B 4	3212	I13		
2148	D 4	3217	M17		
2149	I 4	3251	B23		
2150	B 2	3252	B24		
2151	C 4	3253	B24		
2152	C 5	3254	B24		
2153	B 5	3255	B24		
2154	L 5	3256	J 5		
2155	E 3	3260	G27		
2156	E 4	3261	G26		
2157	E 5	3262	F28		
2158	D 5	3263	D19		
2159	I 3	3264	D19		
2160	I 4	3265	D18		
2161	I 5	3266	D18		
2162	I 5	3267	D19		
2163	L 6	3270	F19		
2164	C22	3271	C17		
2166	M 3	3272	F19		
2167	M 4	3273	F18		
2168	M 4	3274	L16		
2169	K 3	3275	L14		
2170	K 4	3276	L14		
2171	K 4	3277	F18		
2172	F11	3278	I26		
2173	H11	3279	G22		
2174	J11	3280	F22		
2175	L11	3281	F22		
2176	B 7	4003	L17		
2177	D 7	5100	J29		
2178	H 7	5101	N28		
2179	E25	5102	C27		
2180	E24	5104	M10		
2182	M 2	5105	A14		
2185	G23	5106	D14		
2186	G22	5107	F14		
2187	M30	5109	C21		
2188	N26	5110	I28		
2189	I28	5150	C 4		
2199	C 7	5151	E 4		
2201	L28	5152	I 4		
2233	C27	6102	J28		
2250	F23	6103	M27		
2251	C25	6106	I27		
2252	C26	6107	I28		
2253	D25	6150	K 5		
2254	E24	6151	M 5		
2255	C22	6160	F23		
2256	F26	6161	D17		
2257	F26	6162	D18		
2258	F27	6163	C17		
2259	F28	6250	C25		
2260	F27	6251	F27		
2261	G27	7100	J14		
2262	G28	7102	I26		
2270	A15	7103	I15		
2271	D15	7105	C26		
2272	F15	7110	G22		
2277	C21	7111	G21		
3101	L28	7113	J14		
3102	L29	7116	J31		
3103	L29	7117	N29		
3104	M32	7119	B 5		
3110	J15	7120	B 6		
3111	J15	7121	D 6		
3113	J14	7122	I 6		
3114	J15	7123	K 5		
3115	K17	7124	D 5		
3119	K27	7125	I 5		
3120	K27	7156	G27		
3121	J28	7157	L16		
3122	I15	7158	L15		
3123	I30	7159	B 3		
3124	I31	7160	B 3		
3125	H31	7204	I18		
3126	J30	7205	I21		
3127	J31	7206	M 7		
3128	J26	7206	J31		
3129	I26	7206	J32		
3130	I27	7206	J33		
3131	M30	7207	M 9		
3132	M28	7207	N30		
3133	M29	7207	M31		
3134	N29	7207	N31		

Setting cor

- * Unless s
- * 220 - 24
- * Voltages
- * tuner ea
- * Warming
- * For all n
- * probe Ri

1. Electri
panel

N.B.: All pictu
unless s

- 1.1 +141V
Supply t
the main
Connect
Using R3
set the s

- 1.2 Focusing
This is s
the DAF

- 1.3 Vg2 sett
Supply a
Set the c
saturation
Using an
the direc
(fig. 7.2)
relation
Now adj
aid of the
transform

- 1.4 Dynamic
This is s
bottom
adjustme

- 1.5 Horizontal
Connect
Supply a
Adjust p
straight.
Break the

- 1.6 Horizontal
Set using

- 1.7 Picture v
Set using

- 1.8 Vertical
Set using

Setting conditions

- * Unless stated otherwise, the supply voltage used is: 220 - 240V $\pm$ 10%; 50 - 60Hz $\pm$ 5%
- * Voltages and oscillograms are measured in relation to tuner earth. **Never** use the cooling plates as earth.
- * Warming-up time $\approx$ 10 minutes
- * For all measurements it is true that:
probe Ri > 1M Ω ; Ci < 10pF

1. Electrical settings on the large signal panel

N.B.: All picture adjustments are carried out in 16/9 mode unless specified otherwise.

1.1 +141V supply voltage

Supply the mains voltage; this must be isolated from the mains.

Connect a voltmeter over C2238.

Using R3371, on the SOPS DRIVE CIRCUIT (fig. 7.1) set the supply voltage to +141V $\pm$ 0.5V.

1.2 Focusing

This is set with the focus potentiometer (top one on the DAF transformer).

1.3 Vg2 setting

Supply an aerial signal.

Set the contrast to maximum and the brightness and saturation to nominal.

Using an oscilloscope set to field frequency, measure the direct voltage level of the measurement pulse (fig. 7.2) on pin 9 of IC7705, IC7706 and IC7707 in relation to earth.

Now adjust the highest voltage level found with the aid of the Vg2 potentiometer (bottom left on the DAF transformer) to 150V $\pm$ 2V.




Fig. 7.1

1.4 Dynamic focus

This is set with the aid of the potentiometer on the bottom right of the DAF transformer. Repeat the adjustment of the Vg2 and focus.

1.5 Horizontal synchronisation

Connect point 5-IC7400 to point 9-IC7400.

Supply an aerial signal and set the receiver.

Adjust potentiometer R3406 until the picture is straight.

Break the through connection.

1.6 Horizontal centring

Set using potentiometer R3513.

1.7 Picture width

Set using potentiometer R3607.

1.8 Vertical centring

Set using potentiometer R3467.


1.9 Picture height

Movie expand off: set using potentiometer R3410.

Movie expand on: set using potentiometer R3422.

1.10 East/West correction

Movie expand on: set using potentiometer R3602.

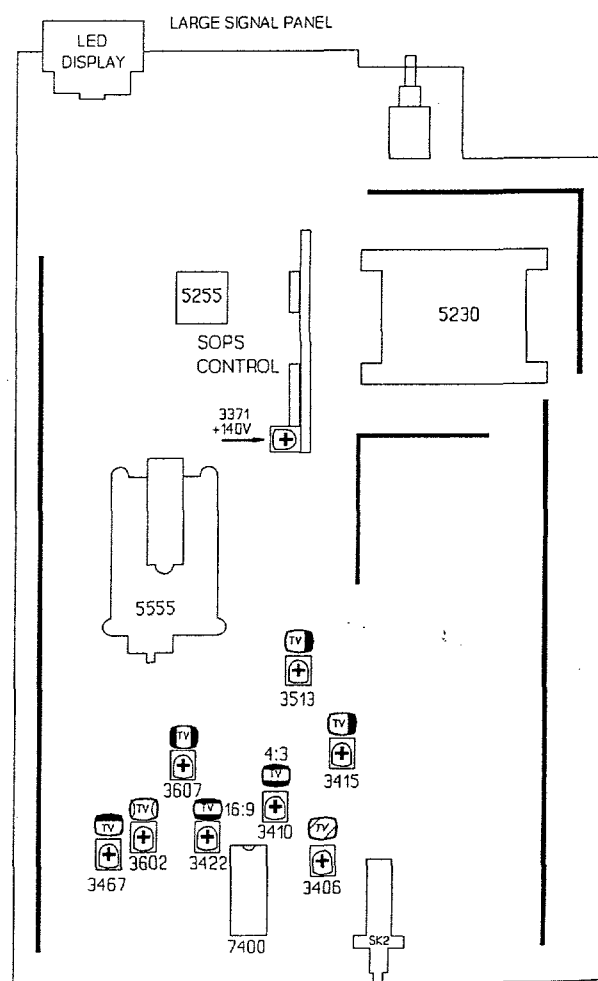

2. Electrical settings on the small signal panel

r R3410.
r R3422.

2.1 Stereo audio channel separation

r R3602.

Connect a signal generator with a 2 carrier stereo signal ("stereo" mode).
Select 1kHz for the right-hand channel and switch off the sound for the left-hand channel.
Connect an oscilloscope to pin 3 of Euroconnector EXT1
Using R3602 on the small signal panel, set the amplitude of the signal to minimum amplitude.

2.2 4.43 MHz chroma suppression circuit

Supply a colour bar signal. Connect an oscilloscope to point 17 of IC7324 and set L5305 to minimum amplitude of the chrominance signal.

2.3a Electrical settings for sets with IC7364 - TDA4510

a-1 Chroma bandpass filter

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.43 MHz. Connect the unit to EXT1. Connect an oscilloscope to pin 9-IC7364.
Set L5354 to maximum amplitude.

a-2 Chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 11-IC7364 (TDA4510) to earth. Set C2380 so that the colour on the screen has practically stopped. Remove the interconnection.

2.3b Electrical settings for sets with IC7365 - TDA4650

b-1 Chroma bandpassfilter

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.286 MHz/0.2 Vpp. Switch the unit to EXT1. Connect pin 27-IC7365 to pin 13-IC7365 (+12V). Connect an oscilloscope to pin 15-IC7365.
Set L5345 to maximum amplitude.
Remove the interconnection.

b-2 4.50 MHz NTSC sound suppression

Connect a generator to point 20 of Euroconnector EXT1 with a frequency of 4.50 MHz and 200mV_{rms}.
Connect point 26-IC7365 to point 13-IC7365.
Connect an oscilloscope to point 15 of IC7365.
Set L5346 to minimum amplitude.
Remove the short circuit.

b-3 6.50 MHz SECAM DK sound suppression

Connect a sine-wave generator to point 20 of Euroconnector EXT1 with a frequency of 6.50 MHz and 200mV_{rms}.
Connect point 28-IC7365 to point 13-IC7365.
Connect an oscilloscope to point 15 of IC7365.
Set L5346 to minimum amplitude.
Remove the short circuit.

b-4 Chroma 8,87 MHz auxiliary oscillator


Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7365 (TDA4650) to earth. Set C2380 so that the colour on the screen has practically stopped. Remove the interconnection.

b-5 Chroma 7,16 MHz auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7365 (TDA4650) to earth. Set R2379 so that the colour on the screen has practically stopped. Remove the interconnection.

b-6 SECAM demodulators

Connect a pattern generator and supply a SECAM black pattern. Connect an oscilloscope to pin 3-IC7365. Set L5370 to minimum amplitude.
Connect the oscilloscope to pin 1-IC7365. Set R3370 to minimum amplitude.

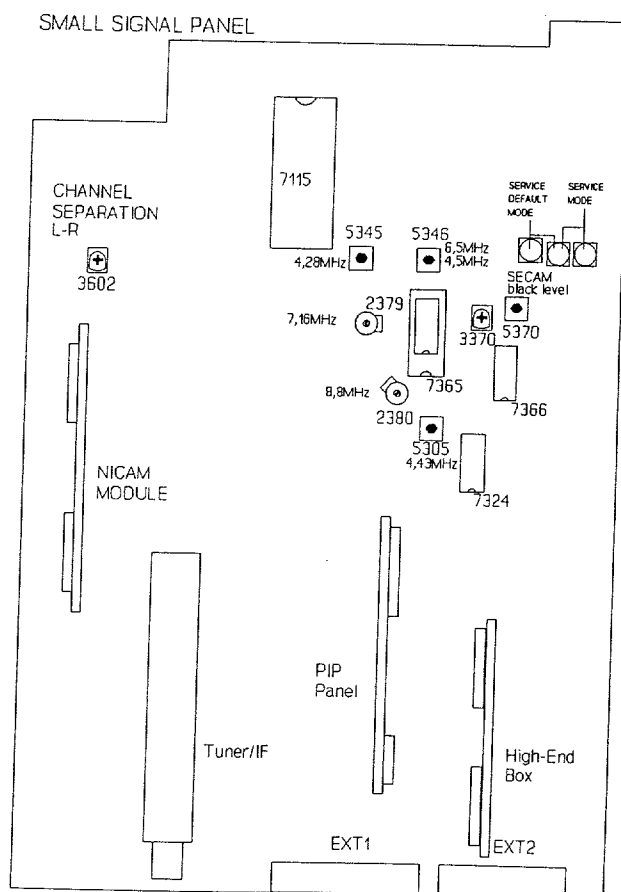

Electrical adjustments

3. Electrical adjustments on the high-end box

3.1 Synchronisation

Connect point 5 of IC7203 to earth. Adjust R3228 until the picture is straight. Remove the short circuit.

3.2 13.5 MHz oscillator

Measure the signals at point 1 of IC7205 and at point 5 of IC7203 simultaneously with an oscilloscope (fig. 7.2). Adjust coil L5100 so that the positive-going flank of the signal at point 1 of IC7205 comes 7.62 μsec after the negative-going flank of the sync pulse in the video signal (point 5 of IC7203).

3.3 27 MHz oscillator

Apply a PAL/SECAM signal. Short pin 28 of IC7204 to earth. Measure the frequency at point 6 of IC7207. Using L5101 set the frequency to 27 MHz $\pm$ 50 kHz.

3.4 10.125 MHz oscillator

Switch on compress.

Measure the signals on point 1 of IC7205 and on point 5 of IC7203 simultaneously with an oscilloscope (fig. 7.2). Adjust coil L5110 so that the rising flank of the signal on point 1 of IC7205 comes 7.62 μsec after the negative flank of the sync pulse in the video signal (point 5 of IC7203).





Fig. 7.2

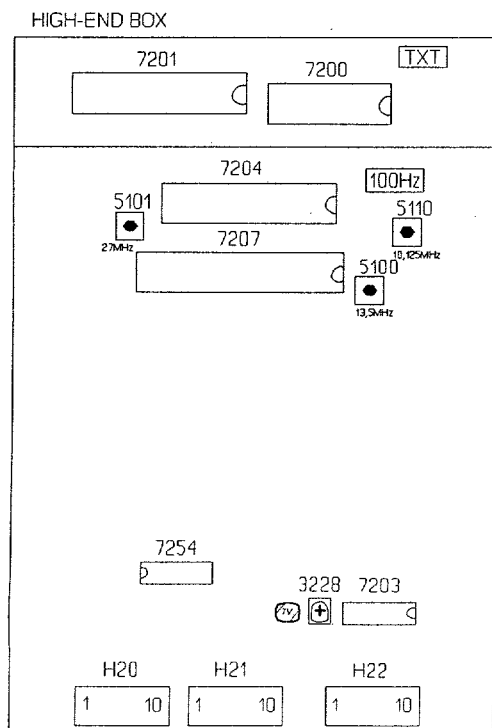

4. Electrical settings on the NICAM decoder panel

4.1 The NICAM demodulator

Supply an aerial or generator signal which has a NICAM audio signal.

Connect the X-input of the oscilloscope to pin 19-IC7110.

Connect the Y-input of the oscilloscope to pin 20-IC7110.

Set the oscilloscope to the X-Y position.

Set the sensitivity of the oscilloscope to 1V/div AC.

Set the X and Y position so that the cross pattern is in the centre of the oscilloscope picture.

Set C2117 on a straight cross pattern (see fig. 7.3).

4.2 The "Sample" clock oscillator

Supply an aerial or generator signal which has a NICAM audio signal.

Connect an oscilloscope to pin 9-IC7150.

Set the sensitivity of the oscilloscope to 1V/div and the time base to 2 μs /div.

Set C2155 so that a symmetrical block wave is visible.






Fig. 7.3

MDA.01468
T28/826

PIP MODULE

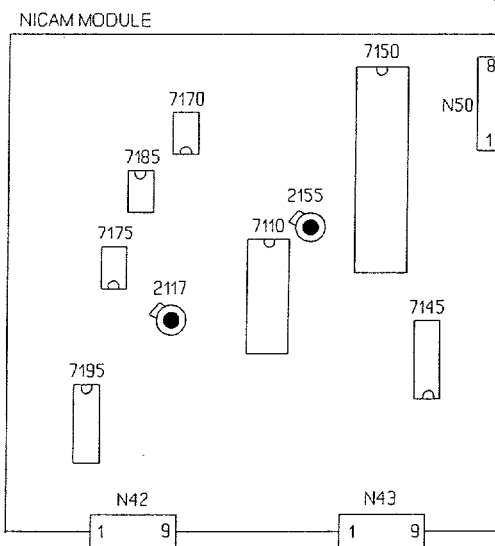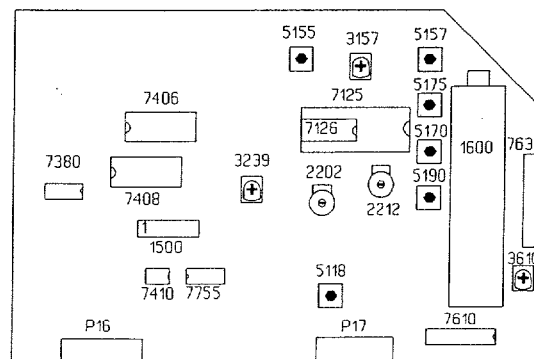

5. Electrical settings on the PIP panel

Before carrying out each setting, it should be ensured that a P.I.P. picture with colour bar is visible on the screen and the unit should have reached its operating temperature (after ≈ 20 min.).

5.1 Horizontal synchronisation

Supply an aerial or generator signal.

Connect pin 28-IC7125 to pin 13-IC7125.

Connect pin 5-IC7755 to earth.

Measure the frequency on pin 17-IC7755 and set this to $15,625 \text{ Hz} \pm 25 \text{ Hz}$ with R3239.

Remove the short circuits.

5.2 Adjustment of PLL circuit

Connect a pattern generator and apply a PAL colour-bar pattern to the CVBS input.

5.2.1 Adjustment of the PLL oscillator

Movie expand off

Main picture 16:9

PIP-picture 16:9

With the aid of L5101 on the PLL PCB set the DC level on pin 5 of 1500 to 2.5V.

5.2.2 Adjustment of the duty cycle

Movie expand off

Main picture 16:9

PIP-picture 4:3

Connect an oscilloscope to pin 11 of IC7408 (SDA9088).

With the aid of R3130 on the PLL PCB set the time T to 13nsec (see fig. 7.4).




Fig. 7.4

5.3 AGC

If the picture from a strong local transmitter is distorted, adjust 3160 until the picture is not distorted.

5.4a Setting for PIP modules with TDA4510

a-1 Chroma bandpass filter

Connect a signal generator (e.g. PM 5326) to pin 10

of P17 and set its frequency to $4.43 \text{ MHz}/0.2 \text{ Vpp}$.

Connect an oscilloscope to pin 9-IC7126.

Set L5118 to maximum amplitude.

a-2 PAL chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 11-IC7126 (TDA4510) to earth.

Set C2202 so that the colour of the PIP picture is practically still.

Remove the interconnection.

a-3 The delayline

Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7126 (TDA4510). Connect the Y-input of the oscilloscope to 2-IC7126 (TDA4510). Set the oscilloscope to the X-Y position.

Set L5155 and L5157 so that the vectors lie in one

line (points which are furthest from the origin).

Set the pattern generator to the "DEM" mode.

Set R3157 so that the vectors lie on top of one another in the origin.

5.4b Setting for PIP modules with TDA4554

b-1 Chroma bandpass filter

Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to $4.286 \text{ MHz}/0.2 \text{ Vpp}$. Connect pin 27-IC7125 to 13-IC7125. Connect an oscilloscope to pin 15-IC7125.

Set L5118 to maximum amplitude.

Remove the interconnection.

b-2 PAL chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7125 (TDA4554) to earth.

Set C2202 so that the colour of the PIP picture is practically still.

Remove the interconnection.

b-3 NTSC chroma auxiliary oscillator

Connect a pattern generator and supply an NTSC M colour bar pattern. Connect pin 17-IC7125 to earth.

Set C2212 so that the colour of the PIP picture is practically still.

Remove the interconnection.

b-4 The delay line

Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7125 (TDA4554). Connect the Y-input of the oscilloscope to pin 3-IC7125 (TDA4554). Set the oscilloscope to the X-Y position.

Set L5155 and L5157 so that the vectors lie in one line (points which are furthest from the origin).

Set the pattern generator to the "DEM" mode.

Set R3157 so that the vectors lie on top of one another in the origin.

b-5 SECAM identification

Connect a pattern generator and supply a SECAM colour bar signal.

Connect pin 27-IC7125 to pin 13-IC7125.

Connect an oscilloscope to pin 21-IC7125.

Adjust L5190 to maximum DC level.

Remove the interconnection.

b-6 SECAM demodulators

Connect a pattern generator and supply a SECAM signal without contents (black). Connect pin 27-IC7125 to pin 13-IC7125. Connect an oscilloscope to pin 1-IC7125. Using L5175, set the DC level during the scan equal to the DC level during the flyback.

In the same way set L5170, but now measure at pin 3-IC7125.

Remove the interconnection.

Electrical adjustments

6. Adjustments in the service menu

Switch in the service menu by connecting pins S23 and S24 on the small-signal panel briefly with each other (see section 9).

In the Service Mode the following menu appears in the picture:

SERVICE YY-MM-DD

- a option 1 xxx
- b option 2 xxx
- c green xxx
- d blue xxx

In this menu "YY-MM-DD" is the release date of the software which is present in the set. The desired adjustment can be selected with the aid of menu keys a, b or c on the remote control.

When the "PP store" key on the local keyboard is pressed, the adjusted values are stored in the memory and the Service Mode is left.

6.1 White balance

Connect a pattern generator and choose a white picture.

- Select c (green) or d (blue)
 - Using P +/- adjust the values of green ("GREEN") and blue ("BLUE") until the desired white balance has been reached.
- Store the selected value by pressing the "PP store" key on the local keyboard.

6.2 Options

The control unit used in this set has been prepared for operation of all the functions possible with this set. For correct operation, however, the control unit has to "know" the functions/features located in the set. This is done with a so-called option code.

A number is allocated to each function. The possible functions are shown with their respective numbers in the tables alongside.

Optioncode 1

The numbers of the functions shown in the table have to be added to each other. The total forms the number for option code 1.

For example, a set has:

Function	Number
Front-end FQ618/ME/IF	2
A PIP module	8
A NICAM module	64
	--- +
Optioncode 1 now becomes	74

Option code 2

The number of the functions shown in the table have to be added to each other. The total forms the number for option code 2.

For example, a set has:

Function	Number
100 Hz high-end box	4
Scandinavian languages	8
	--- +
Option code 2 now becomes	12

The option codes are set as follows:

- Select a: option 1
- Using P +/- set the desired option number.
- Store the value chosen by pressing the "PP store" key on the local keyboard.

These option codes are software adaptations. If the set has to be equipped for these features, the necessary hardware has also to be fitted.

Optioncode 1	
Nbr.	Function
0	Front end = FE816/IF A reception of PAL BG or PAL BG and SECAM BG is now possible.
1	Front end = FE844 Only reception of the UHF band is now possible.
2	Front end = FE816/ME/IF Reception of SECAM L but not of SECAM L' is now possible (reception of NTSC-M is now usually also possible).
4	Front end = FE816/MF/IF Reception of both SECAM L and SECAM L' is now possible (NTSC M reception is generally possible now via the Euroconnector).
8	PIP module fitted This makes it possible to show PIP (Picture In Picture) displays.
16	NTSC-M reception possible This is normally always in combination with front end FE816/ME/IF or FE816/MF/IF.
32	SECAM DK module fitted In this case transmissions using the SECAM DK system can also be received.
64	NICAM module fitted In this case the digital sound with NICAM transmission can be received. Check that the IC is used at position 7145 (PCF8574 or PCF8574A) in connection with number 16 in option code 2.
128	Second front end for PIP fitted If this second front end is fitted a second transmitter can be displayed in the PIP picture. The PIP function (number 8) still applies. Since IC-PCF8574A is now probably used in position 7145 on the NICAM module, number 16 in option code 2 will apply.

Optioncode 2	
Nbr.	Function
4	100 Hz High-end box fitted This will always be the case.
8	Scandinavian languages This enables the use of Scandinavian languages to be selected in the operation menus.
16	NICAM with PCF8574A If the PCF8574A is used instead of the PCF8574 on the NICAM panel at position 7145. This is always the case in sets with a second front end for PIP.

1. The Service Default Mode

The FL1.2 is equipped with a service default mode. The service default mode is a fixed, definite state to which the set can be switched.

1.1 Definition state

The definition of the fixed state in the service default mode is as follows:

- all sound and picture controls are in the central position (exception volume which is turned down)
- tuned to 475.25 MHz
- system:
 - * PAL/SECAM BG for Multi Europe
 - * PAL I for UK
 - * SECAM L for Multi French

1.2 Switch on and off

The service default mode is switched on by shorting pins S24 and S25 on the small signal panel.

The service default mode can only be switched off by switching the set to stand-by. If the set is switched off and then on again using the mains switch or the mains plug, the service default mode will remain on.

If the set switches to stand-by immediately after switching-on, the set cannot be operated and also cannot be switched to the service default mode. The child-proof lock has already been activated. To deactivate the child-proof lock the following series of commands has to be given using the remote control (see also Section 9):

<MENU> - <BLUE> - <RED> - <MENU + > - <MENU OFF>

1.3 Fault signals

To indicate that the set is in the service default mode, the following is displayed on the screen:

SERVICE 00 00 05 06 05

The five numbers after the word "service" stand for the last five fault signals noted by the operator(s). The number on the extreme right represents the last fault signal, that on the extreme left the last fault signal but 4.

Since this enables fault reports to be looked at afterward, it means that intermittent faults can be traced.

When the set leaves the service default mode, the fault-report memory is cleared.

1.4 Operation

During the service default mode the set will accept all operating commands. When, however, the set is switched off and on, it will return to the state as defined above.

2. Software protection

If it is observed by the control that the front end has ceased to give an I²C response, or that IC7430, IC7600 and also IC 7680 are no longer giving any response, the set will switch to the protection mode since it will be assumed that the +5 V or the +13 V power-supply voltage is absent. This software protection device consists of a fault signal (LEDs , code 99) and the switching of the set to stand-by. To enable the fault to be traced, the set has now to be switched to the service default mode. The software protection system is then switched out of circuit.

3. Replacement of EEPROM IC7137

If, during a repair, the EEPROM has to be replaced, the microprocessor will detect that the EEPROM is empty. A fault signal (No. 21) will then be displayed.

If the service mode is now activated (see section 7), the microprocessor will load the EEPROM with a number of standard values for the white balance and the other linear settings. These values, however, must all be checked and, if necessary, re-adjusted.

All options have also to be set, the programs installed and the personal preference set.

List of
I²C Blo

ERR
COD

01

02












04

05

06

07

09

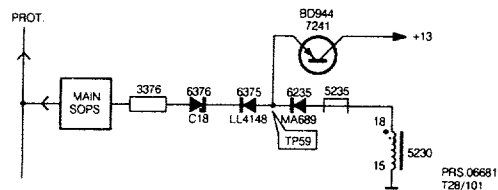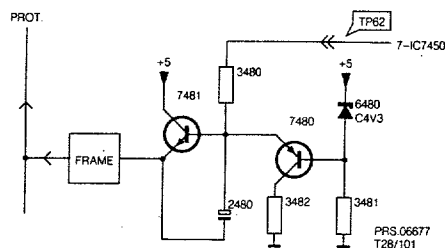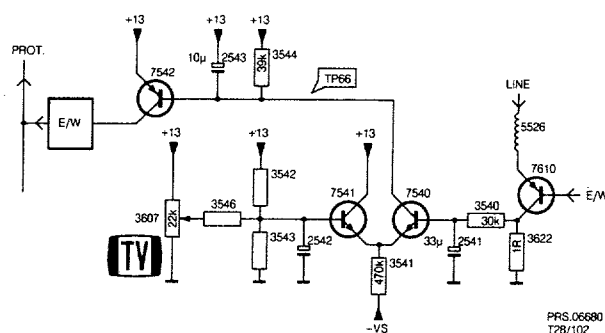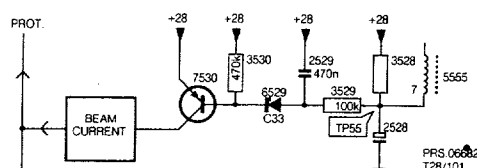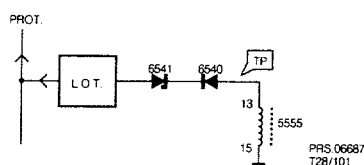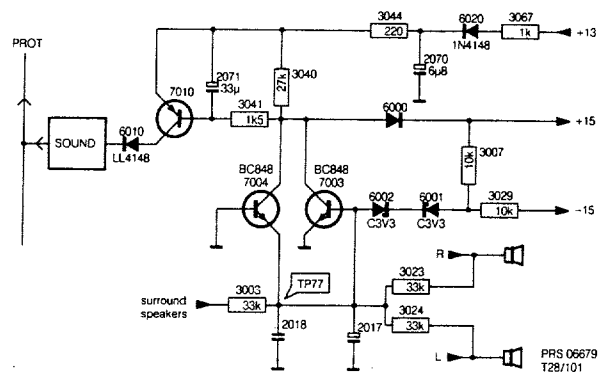

Repair tips

4. Servicing of SMDs (Surface Mounted Devices)

4.1 General cautions on handling and storage

- Oxidation on the terminals of SMDs results in poor soldering. Do not handle SMDs with bare hands.
- Avoid using storage places that are sensitive to oxidation such as places with sulphur or chlorine gas, direct sunlight, high temperatures or a high degree of humidity.
The capacitance or resistance value of the SMDs may be affected by this.
- Rough handling of circuit boards containing SMDs may cause damage to the components as well as the circuit boards. Circuit boards containing SMDs should never be bent or flexed. Different circuit board materials expand and contract at different rates when heated or cooled and the components and/or solder connections may be damaged due to the stress. Never rub or scrape chip components as this may cause the value of the component to change. Similarly, do not slide the circuit board across any surface.

4.2 Removal of SMDs

- Heat the solder (for 2-3 seconds) at each terminal of the chip. By means of litz wire and a slight horizontal force, small components can be removed with the soldering iron. They can also be removed with a solder sucker (see Fig. 8.1A) or:
- While holding the SMD with a pair of tweezers, take it off gently using the soldering iron's heat applied to each terminal (see Fig. 8.1B).
- Remove the excess solder on the solder lands by means of litz wire or a solder sucker (see Fig. 8.1C).

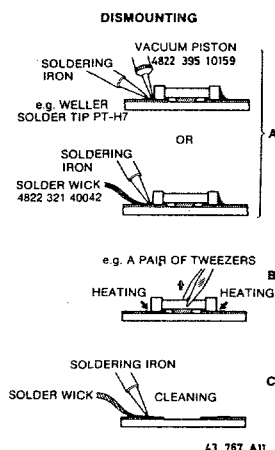


Fig. 8.1




Fig. 8.2

Caution on removal:

- When handling the soldering iron, use suitable pressure and be careful.
- When removing the chip, do not use undue force with the pair of tweezers.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).
- The chip, once removed, must never be reused.

4.3 Attachment of SMDs

- Locate the SMD on the solder lands by means of tweezers and solder the component on one side. Ensure that the component is positioned correctly on the solder lands (see Fig. 8.2A).
- Next complete the soldering of the terminals of the component (see Fig. 8.2B).

Caution when attaching SMDs:

- When soldering the SMD terminals, do not touch them directly with the soldering iron. The soldering should be done as quickly as possible; care must be taken to avoid damage to the terminals of the SMDs themselves.
- Keep the SMD's body in contact with the printed board when soldering.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).
- Soldering should not be done outside the solder land.
- Soldering flux (of rosin) may be used, but should not be acidic.
- After soldering, let the SMD cool down gradually at room temperature.
- The quantity of solder must be proportional to the size of the solder land. If the quantity is too great, the SMD might crack or the solder lands might be torn loose from the printed board (see Fig. 8.3).

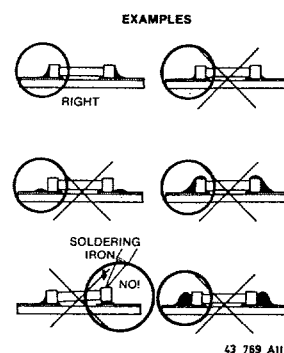


Fig. 8.3

MAIN MENU

PRESS "MENU" ON
THE REMOTE CONTROL

MAIN MENU

a picture	
b sound	
c recording source	
d special features	-----
e programme list	-----
select : a-e off	

PICTURE

a brightness		
b colour		
c contrast		
d sharpness		
select : a-d menu off		

SOUND

a balance		
b treble		
c bass		
d speech on/off		
e sound mode stereo		
select : a-e menu off		

RECORDING SOURCE

a TV to VCR	
b aux to VCR	
c FRONT to VCR	
select : a-c menu off	

BACK TO MAIN MENU

MENU

MENU* ON
E CONTROL

MENU

ce

s

t

off

IG SOURCE

R

enu off

SPECIAL FEATURES

- a child lock
- b sleeptimer
- c display prog. No
- d demonstration
- e pip size

select : a-e menu off

stop demonstration
by switching off
the set


PROGRAMME LIST

pr.name	pr.name	pr.name
0	10	20
1	11	21
2	12	22
3	13	23
4	14	24
5	15	25
6	16	26
7	17	27
8	18	28
9	19	29

select : menu off

MAIN MENU

MDA 02820
T-26/112

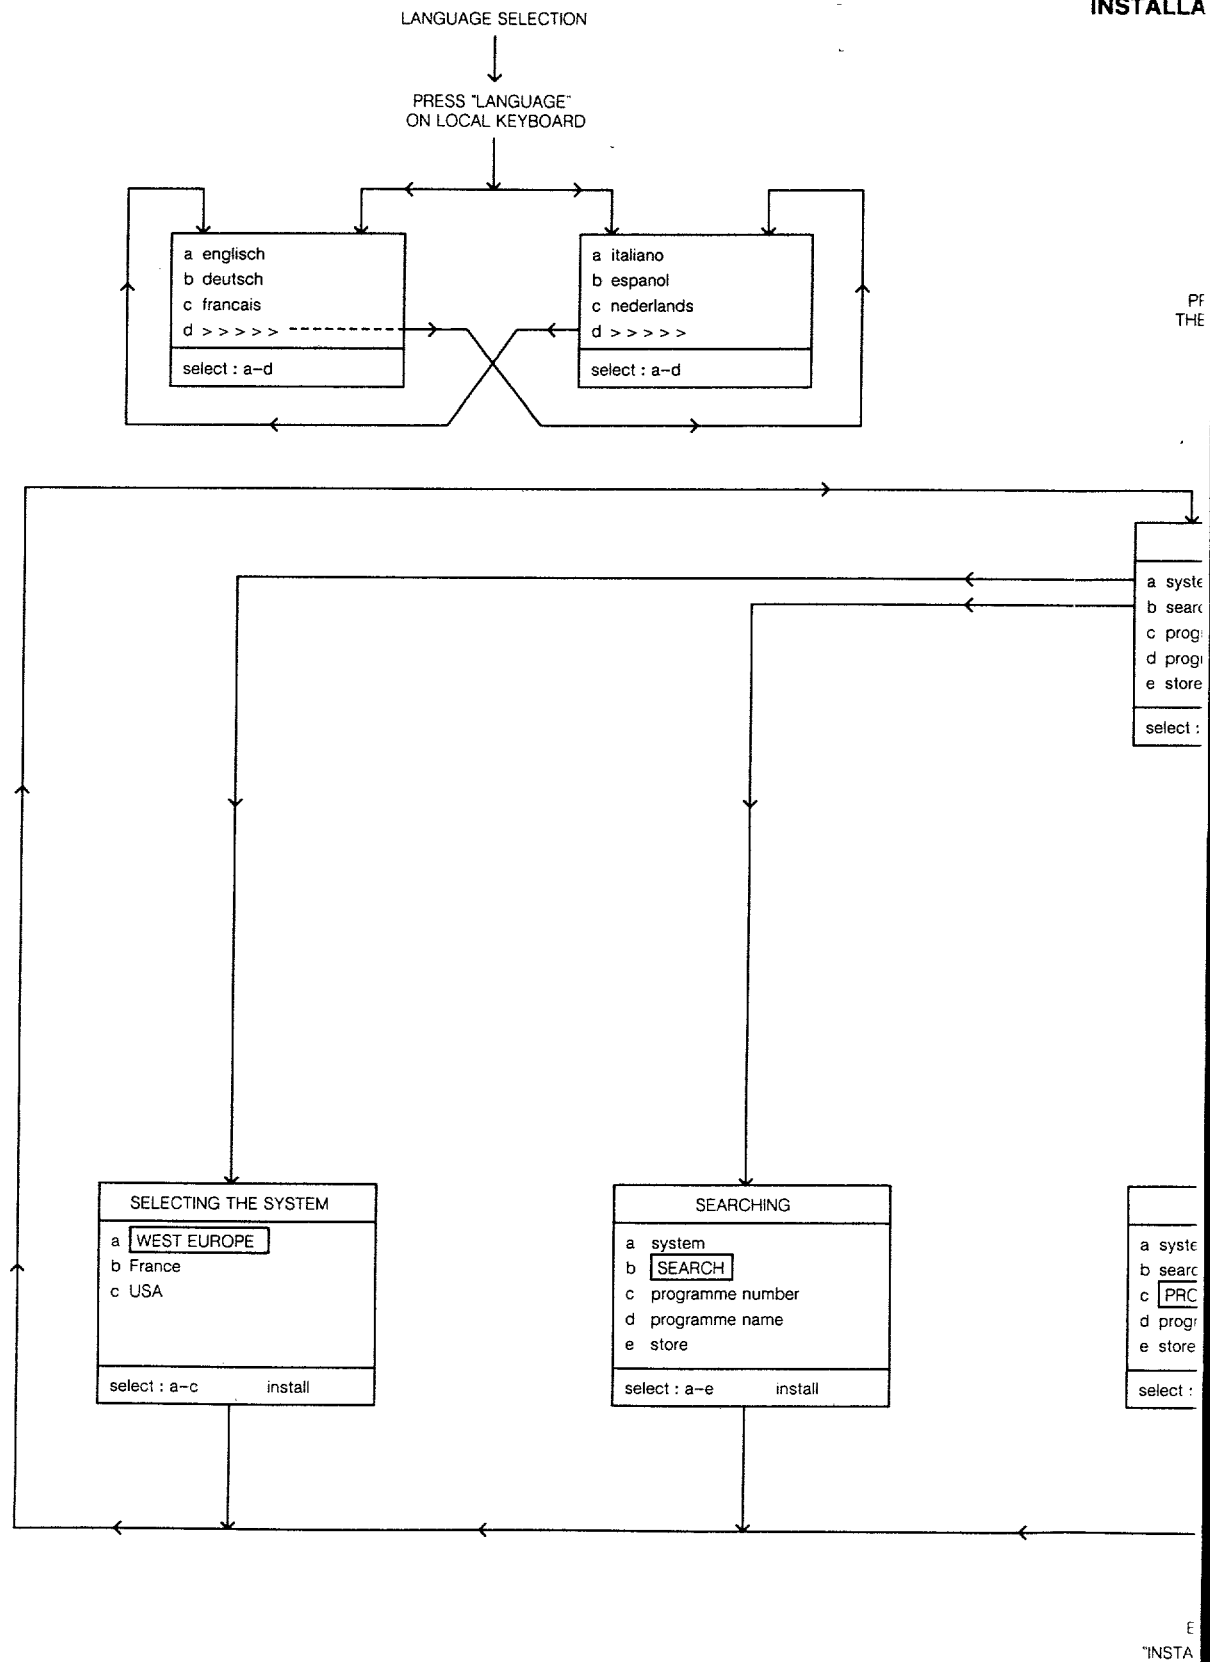

Large signal panel **A B G**

Lar

			-II-			-II-			-II-		
4822 265 40469	6P female gold plated		2023	5322 122 33446	3,3nF 10% 63V	2365	5322 122 32838	82nF 10% 63V	2547		
4822 265 40472	10P female gold plated		2024	5322 122 33446	3,3nF 10% 63V	2372	5322 121 42502	390nF 5% 63V	2548		
4822 290 40295	7P male		2026	4822 122 32927	220nF	2376	4822 124 40272	33μF 20% 16V	255		
4822 265 40442	10P male		2027	4822 122 32927	220nF	2380	4822 122 33496	100nF 10% 63V	2600		
4822 265 20509	2P male grey		2028	4822 122 32927	220nF	2381	4822 122 33496	100nF 10% 63V	2605		
4822 267 40985	6P male		2029	4822 122 32927	220nF	2382	4822 122 33496	100nF 10% 63V	2606		
4822 265 30525	2P male		2030	4822 126 11175	22pF 5% 50V	2386	5322 122 31647	1nF 10% 63V	2608		
4822 264 40207	3P male		2031	4822 126 11175	22pF 5% 50V	2401	4822 122 32542	47nF 10% 63V	2610		
4822 265 30389	2P male		2032	4822 122 31797	22nF 10% 63V	2402	4822 124 41577	4,7μF 20% 50V	2611		
4822 265 30389	2P male		2035	4822 122 31775	680pF 5% 50V	2403	4822 124 41678	22μF 20% 25V	2612		
4822 265 40596	2P male		2038	4822 122 31644	2,2nF 10% 63V	2404	4822 124 41577	4,7μF 20% 50V	2613		
4822 265 20509	2P male grey		2040	4822 122 32927	220nF	2405	4822 122 32542	47nF 10% 63V	2614		
4822 267 50591	6P male gold plated		2041	4822 122 32927	220nF	2406	4822 121 51091	1,2nF 2% 250V	2621		
4822 264 50149	10P male gold plated		2042	4822 122 32927	220nF	2407	5322 122 31647	1nF 10% 63V	2807		
4822 265 30389	2P male		2043	4822 122 32927	220nF	2408	4822 122 31172	180pF 10% 500V	2808		
4822 265 30389	2P male		2044	4822 122 32927	220nF	2409	4822 122 31797	22nF 10% 63V	2809		
4822 264 40207	3P male		2045	4822 122 32927	220nF	2410	4822 121 41854	150nF 5% 63V	3000		
Various parts			2046	4822 122 32927	220nF	2411	4822 121 41854	150nF 5% 63V	3001		
4822 466 93029	insulating plate		2047	4822 122 32927	220nF	2412	4822 122 31173	220pF 10% 500V	3002		
4822 466 92359	insulating plate		2050	4822 124 42108	33μF 20% 16V	2413	4822 122 31768	180pF 5% 50V	3003		
4822 492 70143	spring for 7216		2051	4822 124 42108	33μF 20% 16V	2415	4822 122 32542	47nF 10% 63V	3004		
4822 492 62076	spring for 7000 and 7001		2052	4822 124 42108	33μF 20% 16V	2416	4822 122 33496	100nF 10% 63V	3005		
4822 492 70788	spring for 7011		2053	4822 124 42108	33μF 20% 16V	2417	4822 122 32808	1,2nF 10% 63V	3006		
4822 492 70789	spring fix transistor		2056	4822 122 31773	560pF 5% 50V	2418	4822 122 31797	22nF 10% 63V	3007		
4822 492 70789	spring fix transistor		2057	4822 122 31773	560pF 5% 50V	2419	4822 124 40849	330μF 20% 16V	3008		
4822 492 70789	spring fix transistor		2058	4822 122 31773	560pF 5% 50V	2450	4822 122 32442	10nF 50V	3011		
4822 492 70789	spring fix transistor		2059	4822 122 31773	560pF 5% 50V	2451	4822 122 31746	1000pF 5% 50V	3012		
4822 492 70789	spring fix transistor		2060	4822 122 32142	270pF 5% 63V	2452	4822 124 41716	220μF 20% 35V	3013		
4822 492 70789	spring fix transistor		2061	4822 122 32142	270pF 5% 63V	2455	4822 122 31746	1000pF 5% 50V	3014		
4822 492 70789	spring fix transistor		2065	4822 126 11156	684nF 20%	2456	4822 124 42264	4700μF 20% 25V	3015		
4822 492 70789	spring fix transistor		2066	4822 126 11156	684nF 20%	2457	4822 124 42249	2,2μF 10% 50V	3021		
4822 492 70789	spring fix transistor		2070	4822 124 40272	33μF 20% 16V	2458	4822 122 31797	22nF 10% 63V	3022		
4822 492 70789	spring fix transistor		2071	4822 124 42184	33μF 20% 25V	2459	4822 122 32891	68nF 10% 63V	3023		
4822 492 70789	spring fix transistor		2072	4822 124 40178	100μF 20% 10V	2460	4822 122 33496	100nF 10% 63V	3024		
4822 492 70789	spring fix transistor		2073	4822 124 21212	15μF 20% 40V	2480	4822 124 23495	10μF 20% 25V	3025		
4822 492 70789	spring fix transistor		2074	5322 122 31647	1nF 10% 63V	2502	4822 121 41689	100nF 10% 250V	3030		
4822 492 70789	spring fix transistor		2200	4822 121 43819	680nF 10% 250V	2503	4822 126 11823	270pF 10% 500V	3031		
4822 492 70789	spring fix transistor		2203	4822 121 40487	100nF 10% 400V	2504	4822 126 11539	1,2nF 10% 2KV	3032		
4822 492 70789	spring fix transistor		2214	4822 124 23492	220μF 50% 385V	2507	4822 121 41673	220nF 10% 100V	3033		
4822 492 70789	spring fix transistor		2215	4822 122 33665	3,3nF 20% 125V	2509	4822 122 40112	560pF 20% 500V	3034		
4822 276 12998	main switch		2216	4822 126 10202	1,5nF 10% 2KV	2510	4822 126 11494	2,2nF 10% 500V	3035		
4822 256 30274	fuse holder		2231	4822 122 32585	470pF 10% 500V	2511	4822 124 41739	47μF 20% 160V	3036		
4822 290 60812	socket for ext. loudspeakers		2232	4822 124 40738	330μF 20% 25V	2512	4822 124 40435	10μF 20% 50V	3037		
4822 267 20417	socket for squeeters		2233	4822 122 32585	470pF 10% 500V	2513	4822 124 40435	10μF 20% 50V	3038		
4822 276 13094	switch loudsp. ON/OFF		2234	4822 124 40738	330μF 20% 25V	2517	4822 126 11157	470pF 10% 500V	3040		
1200 4822 070 33152	fuse T3,15A		2235	4822 122 32585	470pF 10% 500V	2518	4822 124 22449	4,7μF 30% 350V	3041		
1250 4822 071 52501	fuse T0,25A		2237	4822 122 33708	2,2nF 10% 1KV	2519	4822 124 41831	1μF 20% 160V	3042		
-II-			2238	4822 124 22583	47μF 160V	2520	4822 121 43397	680nF 5% 250V	3043		
2000 5322 122 33062	270pF 10% 500V		2239	4822 124 40193	68μF 20% 16V	2521	4822 121 43397	680nF 5% 250V	3044		
2001 4822 122 31784	4,7nF 10% 50V		2240	4822 124 42183	1000μF 20% 63V	2522	4822 121 43397	680nF 5% 250V	3045		
2002 4822 122 31784	4,7nF 10% 50V		2254	4822 126 11496	120pF 5% 2KV	2523	5322 121 41603	10nF 5% 2KV	3046		
2003 4822 126 11175	22pF 5% 50V		2255	4822 122 32142	270pF 5% 63V	2524	4822 121 70006	18nF 5% 630V	3047		
2008 4822 122 31797	22nF 10% 63V		2258	5322 121 42502	390nF 5% 63V	2525	4822 124 22347	47μF 20% 50V	3048		
2009 4822 126 11175	22pF 5% 50V		2260	4822 122 31727	470pF 5% 63V	2526	4822 126 11502	470pF 10% 500V	3049		
2011 4822 122 31775	680pF 5% 50V		2261	5322 124 21189	100μF 20% 40V	2527	4822 121 70005	15nF 5% 630V	3050		
2012 4822 122 32927	220nF		2262	4822 122 31727	470pF 5% 63V	2529	4822 124 23491	0,47μF 20% 50V	3051		
2013 4822 122 32927	220nF		2263	4822 124 40849	330μF 20% 16V	2530	4822 122 31797	22nF 10% 63V	3052		
2015 4822 124 42109	22μF 10% 50V		2270	4822 124 40178	100μF 20% 10V	2531	4822 121 40516	22nF 10% 250V	3053		
2016 4822 124 42109	22μF 10% 50V		2272	4822 122 33496	100nF 10% 63V	2533	5322 122 32818	2,2nF 10% 100V	3054		
2018 4822 122 31797	22nF 10% 63V		2302	4822 122 31765	100pF 5% 50V	2534	4822 126 11502	470pF 10% 500V	3055		
2019 4822 122 31414	10nF 100V		2303	4822 122 31808	150pF 10% 50V	2535	4822 124 23488	1000μF 20% 35V	3056		
2020 4822 122 31414	10nF 100V		2308	4822 122 32891	68nF 10% 63V	2536	4822 126 11157	470pF 10% 500V	3057		
2021 4822 122 31414	10nF 100V		2321	4822 121 43047	1μF 10% 63V	2537	4822 124 40184	1000μF 20% 10V	3058		
2022 4822 122 31414	10nF 100V		2331	4822 122 32891	68nF 10% 63V	2541	4822 124 42184	33μF 20% 25V	3059		
			2351	4822 121 41854	150nF 5% 63V	2542	4822 124 22466	1μF 20% 50V	3060		
			2360	4822 122 31981	33nF + -0,5pF 50V	2543	4822 124 23495	10μF 20% 25V	3061		
			2361	4822 121 42589	82nF 5% 63V	2544	4822 124 41525	100μF 20% 25V	3062		
						2546	4822 122 33496	100nF 10% 63V	3063		

Large signal panel (continued)



2547	4822 122 32566	3,9nF 10% 63V
2548	4822 124 22466	1μF 20% 50V
2551	4822 124 40195	150μF 20% 16V
2600	4822 124 41577	4,7μF 20% 50V
2605	4822 122 31781	1500pF 10% 50V
2606	4822 122 31797	22nF 10% 63V
2609	5322 121 42386	100nF 5% 63V
2610	4822 124 41576	2,2μF 20% 50V
2611	4822 124 41577	4,7μF 20% 50V
2612	4822 124 41577	4,7μF 20% 50V
2613	4822 122 31784	4,7nF 10% 50V
2615	4822 122 33498	2,7nF 10% 63V
2626	4822 122 32153	1,8nF 10% 63V
2801	4822 122 32153	1,8nF 10% 63V
2805	4822 124 40435	10μF 20% 50V
2806	4822 122 31797	22nF 10% 63V



3000	4822 051 10912	9k1 2% 0,25W
3001	4822 051 10912	9k1 2% 0,25W
3004	4822 051 10104	100k 2% 0,25W
3005	4822 051 10104	100k 2% 0,25W
3006	4822 051 10204	200k 2% 0,25W
3009	4822 051 10204	200k 2% 0,25W
3011	4822 051 10203	20k 2% 0,25W
3012	4822 051 10203	20k 2% 0,25W
3013	4822 116 52268	300k 5% 0,5W
3014	4822 116 52268	300k 5% 0,5W
3016	4822 052 10828	8Ω 2% 0,33W
3021	4822 052 10828	8Ω 2% 0,33W
3022	4822 052 10828	8Ω 2% 0,33W
3027	4822 051 10103	10k 2% 0,25W
3028	4822 051 10103	10k 2% 0,25W
3029	4822 051 10123	12k 2% 0,25W
3030	4822 051 10123	12k 2% 0,25W
3031	4822 051 10102	1k 2% 0,25W
3032	4822 051 10102	1k 2% 0,25W
3033	4822 116 52244	15k 5% 0,5W
3034	4822 051 10472	4k7 2% 0,25W
3035	4822 051 10153	15k 2% 0,25W
3036	4822 051 10152	1k5 2% 0,25W
3037	4822 051 10152	1k5 2% 0,25W
3040	4822 051 10273	27k 2% 0,25W
3041	4822 051 10152	1k5 2% 0,25W
3043	4822 051 10203	20k 2% 0,25W
3044	4822 051 10221	220Ω 2% 0,25W
3049	4822 051 10102	1k 2% 0,25W
3050	4822 051 10103	10k 2% 0,25W
3051	4822 051 10203	20k 2% 0,25W
3052	4822 051 10472	4k7 2% 0,25W
3053	4822 051 10472	4k7 2% 0,25W
3054	4822 110 42205	4M7 5% 0,5W
3060	4822 051 10203	20k 2% 0,25W
3065	4822 051 10184	180k 2% 0,25W
3066	4822 051 10184	180k 2% 0,25W
3067	4822 116 52299	7k5 5% 0,5W
3068	4822 116 52207	1k2 5% 0,5W
3069	4822 051 10752	7k5 2% 0,25W
3072	4822 051 10479	47Ω 2% 0,25W
3073	4822 051 10223	22k 2% 0,25W
3074	4822 051 10103	10k 2% 0,25W
3201	4822 110 42205	4M7 5% 0,5W
3202	4822 110 42205	4M7 5% 0,5W
3204	4822 116 40215	NTC/PTC
3209	4822 113 80575	1Ω5 10% 5W
3210	4822 116 52239	120k 5% 0,5W
3211	4822 116 52239	120k 5% 0,5W
3212	4822 116 52234	100k 5% 0,5W



3213	4822 051 10823	82k 2% 0,25W
3216	4822 115 90309	56Ω 10% 5W
3239	4822 116 52297	68k 5% 0,5W
3240	4822 116 52297	68k 5% 0,5W
3241	4822 113 80572	2Ω 2 10% 5W
3242	4822 051 10122	1k2 2% 0,25W
3243	4822 116 52226	560Ω 5% 0,5W
3244	4822 051 10151	150Ω 2% 0,25W
3245	4822 116 52226	560Ω 5% 0,5W
3247	4822 051 20222	2k2 5% 0,1W
3248	4822 051 20222	2k2 5% 0,1W
3249	4822 116 52258	220k 5% 0,5W
3250	4822 116 52198	62Ω 5% 0,5W
3251	4822 051 10102	1k 2% 0,25W
3252	4822 116 52258	220k 5% 0,5W
3253	4822 116 82738	10k 10%
3255	4822 116 52243	1k5 5% 0,5W
3266	4822 051 10151	150Ω 2% 0,25W
3267	4822 051 10101	100Ω 2% 0,25W
3268	4822 053 11689	68Ω 5% 2W
3270	4822 051 10118	1Ω1 5% 0,25W
3271	4822 053 10399	39Ω 5% 1W
3272	4822 116 90536	120Ω 1% 0,125W
3273	4822 051 10472	4k7 2% 0,25W
3274	4822 051 10102	1k 2% 0,25W
3275	4822 116 52206	120Ω 5% 0,5W
3300	4822 053 10753	75k 5% 1W
3304	4822 051 10473	47k 2% 0,25W
3305	4822 051 10332	3k3 2% 0,25W
3306	4822 051 10823	82k 2% 0,25W
3308	4822 053 12151	150Ω 5% 3W
3309	4822 051 10103	10k 2% 0,25W
3310	4822 116 52184	18Ω 5% 0,5W
3311	4822 051 10471	470Ω 2% 0,25W
3312	4822 051 10101	100Ω 2% 0,25W
3313	4822 116 52184	18Ω 5% 0,5W
3314	4822 116 52223	430Ω 5% 0,5W
3315	4822 116 52223	430Ω 5% 0,5W
3317	4822 051 10682	6k8 2% 0,25W
3320	4822 051 10471	470Ω 2% 0,25W
3321	4822 051 10471	470Ω 2% 0,25W
3322	4822 051 10471	470Ω 2% 0,25W
3331	4822 116 52267	30k 5% 0,5W
3332	4822 116 52233	10k 5% 0,5W
3351	4822 052 11279	27Ω 5% 0,5W
3356	4822 051 10751	750Ω 2% 0,25W
3357	4822 050 27871	787Ω 1% 0,6W
3358	4822 116 52183	16Ω 5% 0,5W
3360	4822 051 10122	1k2 2% 0,25W
3362	4822 051 10151	150Ω 2% 0,25W
3364	4822 051 10471	470Ω 2% 0,25W
3365	4822 051 10221	220Ω 2% 0,25W
3366	4822 051 10221	220Ω 2% 0,25W
3368	4822 116 52226	560Ω 5% 0,5W
3369	4822 116 52226	560Ω 5% 0,5W
3370	4822 051 10332	3k3 2% 0,25W
3371	4822 100 11348	1k 30% LIN
3372	4822 051 10561	560Ω 2% 0,25W
3374	4822 116 52301	75k 5% 0,5W
3375	4822 051 10242	2k4 2% 0,25W
3376	4822 116 52175	100Ω 5% 0,5W
3378	4822 051 10101	100Ω 2% 0,25W
3380	4822 051 10152	1k5 2% 0,25W
3381	4822 051 10152	1k5 2% 0,25W
3382	4822 051 10103	10k 2% 0,25W
3383	4822 051 10103	10k 2% 0,25W
3387	4822 051 10223	22k 2% 0,25W
3402	4822 051 10562	5k6 2% 0,25W



3403	4822 051 10229	22Ω 2% 0,25W
3404	4822 051 10182	1k8 2% 0,25W
3405	4822 051 10333	33k 2% 0,25W
3406	4822 100 11483	10k 30% 0,1W
3407	4822 051 10561	560Ω 2% 0,25W
3408	4822 051 10563	56k 2% 0,25W
3409	4822 116 52265	270k 5% 0,5W
3410	4822 100 11731	150k 30% 0,1W
3411	4822 051 10204	200k 2% 0,25W
3412	4822 051 10474	470k 2% 0,25W
3414	4822 051 10154	150k 2% 0,25W
3415	4822 100 11392	47k 30% LIN
3417	4822 116 52256	2k2 5% 0,5W
3418	4822 051 10201	200Ω 2% 0,25W
3419	4822 052 10279	27Ω 5% 0,33W
3421	4822 051 10152	1k5 2% 0,25W
3422	4822 105 11023	1k 30% 0,1W
3424	4822 051 10201	200Ω 2% 0,25W
3426	4822 051 10331	330Ω 2% 0,25W
3428	4822 051 10333	33k 2% 0,25W
3429	4822 116 52205	1k1 5% 0,5W
3430	4822 116 52224	470Ω 5% 0,5W
3438	4822 116 52205	1k1 5% 0,5W
3439	4822 111 90368	680k 2% 0,125W
3440	4822 051 10163	16k 2% 0,25W
3441	4822 116 52293	6k2 5% 0,5W
3442	4822 051 10332	3k3 2% 0,25W
3443	4822 051 10223	22k 2% 0,25W
3444	4822 051 10103	10k 2% 0,25W
3448	4822 116 52233	10k 5% 0,5W
3450	4822 051 10562	5k6 2% 0,25W
3451	4822 051 10432	4k3 2% 0,25W
3453	4822 053 10181	180Ω 5% 1W
3455	4822 051 10471	470Ω 2% 0,25W
3456	4822 051 10114	110k 2% 0,25W
3457	4822 051 10822	8k2 2% 0,25W
3458	4822 116 83332	1Ω1 5% 0,5W
3459	4822 116 80176	1Ω 5% 0,5W
3460	4822 053 12181	180Ω 5% 3W
3461	4822 116 80176	1Ω 5% 0,5W
3462	4822 116 80176	1Ω 5% 0,5W
3463	5322 116 82222	1Ω2 5% 0,5W
3464	4822 053 10271	270Ω 5% 1W
3465	4822 051 10681	680Ω 2% 0,25W
3467	4822 100 20166	10k 30% LIN
3468	4822 053 12181	180Ω 5% 3W
3473	4822 051 10109	10Ω 2% 0,25W
3479	4822 051 10683	68k 2% 0,25W
3480	4822 116 52234	100k 5% 0,5W
3481	4822 051 10102	1k 2% 0,25W
3482	4822 051 10229	22Ω 2% 0,25W
3484	4822 051 10224	220k 2% 0,25W
3485	4822 051 10102	1k 2% 0,25W
3500	4822 116 80176	1Ω 5% 0,5W
3501	4822 116 52274	36k 5% 0,5W
3502	4822 116 52306	9k1 5% 0,5W
3503	4822 116 52306	9k1 5% 0,5W
3504	4822 116 52176	10Ω 5% 0,5W
3505	4822 116 52229	750Ω 5% 0,5W
3506	4822 053 11108	1Ω 5% 2W
3507	4822 116 52184	18Ω 5% 0,5W
3508	4822 116 83003	1k5 10% 5W
3509	4822 053 20104	100k 5% 0,25W
3510	4822 053 10681	680Ω 5% 1W
3511	4822 053 11128	1Ω2 5% 2W
3512	4822 051 10331	330Ω 2% 0,25W
3513	4822 100 11319	4k7 30% LIN
3514	4822 116 52197	56Ω 5% 0,5W

Large signal panel (continued)


Large

	3515 4822 052 10108 1Ω 5% 0,33W	3516 4822 052 10108 1Ω 5% 0,33W	3517 4822 052 11108 1Ω 5% 0,5W	3518 4822 116 52267 30k 5% 0,5W	3519 4822 116 52267 30k 5% 0,5W
	3520 4822 052 11911 910Ω 5% 0,5W	3521 4822 052 11911 910Ω 5% 0,5W	3522 4822 053 12279 27Ω 5% 3W	3523 4822 116 52233 10k 5% 0,5W	3524 4822 116 52176 10Ω 5% 0,5W
	3525 4822 116 52207 1k2 5% 0,5W	3526 4822 116 52306 9k1 5% 0,5W	3527 4822 051 10102 1k 2% 0,25W	3528 4822 116 52229 750Ω 5% 0,5W	3529 4822 051 10104 100k 2% 0,25W
	3530 4822 051 10474 470k 2% 0,25W	3531 4822 116 52274 36k 5% 0,5W	3532 4822 116 52213 180Ω 5% 0,5W	3533 4822 116 52213 180Ω 5% 0,5W	3534 4822 053 11128 1Ω 2% 2W
	3535 4822 053 11128 1Ω 2% 2W	3536 4822 053 10331 330Ω 5% 1W	3537 4822 116 52197 56Ω 5% 0,5W	3538 4822 050 28202 8k2 1% 0,6W	3539 4822 052 10108 1Ω 5% 0,33W
	3540 4822 116 52267 30k 5% 0,5W	3541 4822 116 52272 330k 5% 0,5W	3542 4822 051 10104 100k 2% 0,25W	3543 4822 051 10242 2k4 2% 0,25W	3544 4822 051 10393 39k 2% 0,25W
	3545 4822 116 52208 130Ω 5% 0,5W	3546 4822 051 10104 100k 2% 0,25W	3547 4822 051 10109 10Ω 2% 0,25W	3548 4822 051 10392 3k9 2% 0,25W	3549 4822 051 10124 120k 2% 0,25W
	3550 4822 051 10132 1k3 2% 0,25W	3551 4822 051 10151 150Ω 2% 0,25W	3552 4822 116 52207 1k2 5% 0,5W	3553 4822 116 52207 1k2 5% 0,5W	3556 4822 053 11108 1Ω 5% 2W
	3558 4822 051 10109 10Ω 2% 0,25W	3560 4822 113 80453 6Ω 8 10% 5W	3561 5322 116 81141 820Ω 5%	3562 5322 116 80434 2k2 1% 0,125W	3563 4822 116 52175 100Ω 5% 0,5W
	3564 4822 051 10569 56Ω 2% 0,25W	3570 4822 116 52207 1k2 5% 0,5W	3601 4822 051 10104 100k 2% 0,25W	3602 4822 100 11213 22k 30% LIN	3603 4822 051 10163 16k 2% 0,25W
	3604 4822 051 10624 620k 2% 0,25W	3605 4822 051 10203 20k 2% 0,25W	3606 4822 051 10223 22k 2% 0,25W	3607 4822 100 11213 22k 30% LIN	3608 4822 051 10103 10k 2% 0,25W
	3609 4822 051 10473 47k 2% 0,25W	3610 4822 051 10472 4k7 2% 0,25W	3611 4822 116 52256 2k2 5% 0,5W	3612 4822 116 52283 4k7 5% 0,5W	3613 4822 051 10202 2k 2% 0,25W
	3614 4822 116 52249 1k8 5% 0,5W	3615 4822 116 52224 470Ω 5% 0,5W	3616 4822 051 10332 3k3 2% 0,25W	3617 4822 051 20222 2k2 5% 0,1W	3618 4822 051 10683 68k 2% 0,25W
	3619 4822 051 20222 2k2 5% 0,1W	3620 4822 051 10622 6k2 2% 0,25W	3621 4822 051 10114 110k 2% 0,25W		
	3622 4822 116 80176 1Ω 5% 0,5W	3623 4822 116 80176 1Ω 5% 0,5W	3626 4822 051 10204 200k 2% 0,25W	3627 4822 051 10202 2k 2% 0,25W	3628 4822 051 10104 100k 2% 0,25W
	3629 4822 051 10624 620k 2% 0,25W	3630 4822 051 10103 10k 2% 0,25W	3631 4822 116 52233 10k 5% 0,5W	3632 4822 051 10134 130k 2% 0,25W	3633 4822 051 10102 1k 2% 0,25W
	3800 4822 116 52289 5k6 5% 0,5W	3801 4822 051 10184 180k 2% 0,25W	3802 4822 051 10104 100k 2% 0,25W	3803 4822 051 20222 2k2 5% 0,1W	3804 4822 051 10103 10k 2% 0,25W
	3805 4822 111 41424 22Ω 5% 0,3W	3806 4822 051 20222 2k2 5% 0,1W	3807 4822 116 52256 2k2 5% 0,5W	3809 4822 051 10104 100k 2% 0,25W	3810 4822 050 11002 1k 1% 0,4W
	Jumper				
	4000 4822 051 10008 0Ω 5% 0,25W	4001 4822 051 10008 0Ω 5% 0,25W	4003 4822 051 10008 0Ω 5% 0,25W	4004 4822 051 10008 0Ω 5% 0,25W	4006 4822 051 10008 0Ω 5% 0,25W
	4007 4822 051 10008 0Ω 5% 0,25W	4074 4822 051 10008 0Ω 5% 0,25W	4200 4822 051 10008 0Ω 5% 0,25W	4400 4822 051 10008 0Ω 5% 0,25W	4402 4822 051 10008 0Ω 5% 0,25W
	4403 4822 051 10008 0Ω 5% 0,25W	4404 4822 051 10008 0Ω 5% 0,25W	4406 4822 051 10008 0Ω 5% 0,25W	4407 4822 051 10008 0Ω 5% 0,25W	4408 4822 051 10008 0Ω 5% 0,25W
	4409 4822 051 10008 0Ω 5% 0,25W	4415 4822 051 10008 0Ω 5% 0,25W	4511 4822 051 10008 0Ω 5% 0,25W	4512 4822 051 10008 0Ω 5% 0,25W	4601 4822 051 10008 0Ω 5% 0,25W
	4802 4822 051 10008 0Ω 5% 0,25W	4803 4822 051 10008 0Ω 5% 0,25W	4804 4822 051 10008 0Ω 5% 0,25W		
	5204 4822 157 63508 18μH	5230 4822 148 81192 SOPS	5237 4822 526 10494 ferrite bead	5241 4822 157 62412 27μH 10%5K	5255 4822 146 30955 transf. assy CU15B20
	5260 4822 526 10494 ferrite bead	5308 4822 157 63302 150μH 10%	5310 4822 157 63301 1μH 15%	5381 4822 157 52265 100μH 10%	5503 4822 157 63252 LINE DRIVER
	5505 4822 157 51588 0,82μH 20%	5506 4822 157 51588 0,82μH 20%	5507 4822 157 63506 coil	5510 4822 157 62886 33μH 10%8	5511 4822 157 52407 39μH 7,5%
	5514 4822 157 63256 DC-SHIFT	5520 4822 157 63514 LINEARITY	5521 4822 157 63512 LINEARITY CORR.	5524 4822 526 10494 ferrite bead	5525 4822 157 52392 27μH 10%
	5526 4822 157 63513 EAST-WEST	5527 4822 157 63493 1,5μH 20%	5534 4822 158 10551 27μH 7,5%	5543 4822 157 62412 27μH 10%	5555 4822 140 10426 L.O.T.
	6000 4822 130 80446 LL4148	6001 4822 130 80446 LL4148	6008 4822 209 73095 P4KE30C-7000	6010 4822 130 80446 LL4148	6011 4822 130 80446 LL4148
	6012 4822 130 80446 LL4148	6016 4822 130 80446 LL4148	6021 4822 130 80446 LL4148	6201 4822 130 80446 LL4148	6210 4822 130 33887 GP15J-16
	6211 4822 130 33887 GP15J-16	6212 4822 130 33887 GP15J-16	6213 4822 130 33887 GP15J-16	6216 4822 130 42606 BYD33J	6230 4822 130 33529 BY229F-200
	6232 4822 130 33529 BY229F-200	6235 4822 130 81104 MA689	6237 4822 130 80572 RGP30J-L7004	6238 4822 130 80572 RGP30J-L7004	6246 4822 130 82347 LLZ-F6V8
	6251 4822 130 80954 LLZ-C5V6	6260 4822 130 80446 LL4148	6262 4822 130 60778 BYD73B	6266 4822 130 34278 BZX79-F6V8	6272 4822 130 34173 BZX55-B5V6
	6280 4822 130 30621 1N4148	6302 4822 130 80446 LL4148	6303 4822 130 80446 LL4148	6304 4822 130 80446 LL4148	6306 4822 130 34499 BZX79-C20
	6308 4822 130 42488 BYD33D	6312 4822 130 42488 BYD33D	6315 4822 130 80446 LL4148	6319 4822 130 34173 BZX79-C5V6	6321 4822 130 80954 LLZ-C5V6
	6331 4822 130 80446 LL4148	6349 4822 130 80446 LL4148	6350 4822 130 80446 LL4148	6351 4822 130 80446 LL4148	6352 4822 130 80446 LL4148
	6353 4822 130 80446 LL4148	6355 4822 130 80446 LL4148	6356 4822 130 82345 LLZ-C22	6357 4822 130 80446 LL4148	6370 4822 130 81512 LLZ-C6V2
	6371 4822 130 80446 LL4148	6372 4822 130 80446 LL4148	6373 4822 130 82583 LLZ-C9V1	6375 4822 130 80446 LL4148	6376 4822 130 80922 LLZ-C18
	6402 4822 130 80446 LL4148	6403 4822 130 80446 LL4148	6404 4822 130 80446 LL4148	6417 4822 130 81223 LLZ-C2V4	6422 4822 130 80446 LL4148
	6440 4822 130 30621 1N4148	6441 4822 130 80446 LL4148	6452 4822 130 42488 BYD33D	6480 4822 130 31554 BZX79-C4V3	6506 5322 130 32184 BYV27/50
	6515 4822 130 42488 BYD33D				

Large signal panel (continued)

DAF panel **B**

6516 4822 130 42488 BYD33D
 6517 4822 130 42488 BYD33D
 6519 4822 130 32896 BYD33M
 6520 4822 130 32896 BYD33M
 6526 4822 130 33531 BY229F-600
 6527 4822 130 82584 MUR10150E
 6529 4822 130 34329 BZX79-C43
 6530 4822 130 30842 BAV21
 6534 4822 130 82758 BYV29F-300
 6536 4822 130 33529 BY229F-200
 6542 4822 130 42488 BYD33D
 6546 4822 130 80446 LL4148
 6547 4822 130 30621 1N4148
 6551 4822 130 31981 BZX79-F3V9
 6570 4822 130 31024 BZX79-C18
 6611 4822 130 81027 LLZ-C11
 6633 4822 130 81512 LLZ-C6V2
 6801 4822 130 80446 LL4148
 6802 5322 130 34337 BAV99
 6803 4822 130 80446 LL4148
 6804 4822 130 80446 LL4148



7000 4822 209 73311 TDA1521Q/N4
 7001 4822 209 73311 TDA1521Q/N4
 7002 4822 209 83163 LM833N
 7003 4822 130 61207 BC848
 7005 5322 130 42136 BC848C
 7006 5322 130 42136 BC848C
 7007 4822 130 61207 BC848
 7008 4822 130 61207 BC848
 7009 4822 209 83163 LM833N
 7010 5322 130 42012 BC858
 7011 4822 209 63913 TDA1521AQ/N4
 7012 4822 130 61207 BC848
 7013 4822 130 61207 BC848
 7201 5322 130 42756 BC857C
 7216 4822 130 60851 2SC3973B
 7241 4822 130 61003 BD944F
 7242 5322 130 41981 BC848A
 7243 5322 130 41981 BC848A
 7250 4822 130 62509 BUX85F
 7251 4822 130 61207 BC848
 7268 4822 130 44121 BC338
 7270 4822 130 40823 BD135
 7272 4822 130 61207 BC848
 7273 4822 130 42513 BC858C
 7305 5322 130 42136 BC848C
 7311 4822 130 42513 BC858C
 7312 4822 130 40982 BD437
 7318 4822 130 42615 BC817-40
 7320 4822 130 82034 CNX83A
 7321 4822 130 62742 BD943F
 7360 4822 130 42513 BC858C
 7369 5322 130 42755 BC847C
 7370 5322 130 42136 BC848C
 7371 4822 130 42513 BC858C
 7380 4822 130 42513 BC858C
 7381 5322 130 42136 BC848C
 7384 5322 130 42755 BC847C
 7400 4822 209 30402 TDA2579B/N1/S1
 7402 5322 130 42136 BC848C
 7417 4822 130 42513 BC858C
 7443 4822 130 61207 BC848
 7444 4822 130 61207 BC848
 7450 4822 209 30403 TDA3654Q/N3/S1
 7451 5322 130 42012 BC858A



7469 4822 130 44283 BC636
 7480 4822 130 42513 BC858C
 7481 5322 130 42136 BC848C
 7501 4822 130 42159 TBF819
 7506 4822 130 62843 2SC4288A
 7512 4822 130 41344 BC337-40
 7513 4822 130 41327 BC327-40
 7530 4822 130 61233 BC857
 7540 5322 130 42755 BC847C
 7541 5322 130 42755 BC847C
 7542 5322 130 42756 BC857C
 7543 4822 130 80136 BC856
 7550 4822 130 61003 BD944F
 7551 4822 130 62846 ON4590
 7552 4822 130 62846 ON4590
 7601 4822 130 61207 BC848
 7602 5322 130 42012 BC858
 7603 5322 130 42012 BC858
 7608 4822 130 44503 BC547C
 7610 4822 130 62845 BDT60F
 7616 5322 130 42136 BC848C
 7618 5322 130 42136 BC848C
 7800 5322 209 10576 4053B
 7801 4822 130 61207 BC848
 7802 4822 130 61207 BC848

4822 265 20533 2P male
 4822 265 40596 2P male
 4822 267 41018 2P male
 4822 265 20509 2P male



2860 4822 126 11825 680pF 10% 2KV



3861 4822 051 10123 12k 2% 0,25W



5860 5322 150 31002 AT4043/67

Sn

4822 265 40252	7P male	2138	4822 124 40193	68μF 20% 16V	2375	4822 122 32863	22nF 80% 50V	266
4822 267 50637	10P male	2160	4822 124 40849	330μF 20% 16V	2376	5322 122 31641	47nF 50V	266
4822 265 41113	7P	2161	4822 122 33496	100nF 10% 63V	2377	5322 121 42661	330nF 5% 63V	266
4822 265 41114	9P	2163	4822 122 33496	100nF 10% 63V	2378	4822 122 31947	100nF 20% 63V	266
4822 265 41086	9P male	2164	4822 122 33496	100nF 10% 63V	2379	4822 125 50207	33pF trim.	266
4822 265 41082	10P	2166	4822 124 40684	150μF 20% 6,3V	2380	4822 125 50207	33pF trim.	266
4822 290 40295	7P	2168	4822 122 32927	220nF	2381	5322 121 42661	330nF 5% 63V	266
4822 267 40648	5P male gold plated	2169	4822 122 32442	10nF 50V	2382	5322 122 31647	1nF 10% 63V	268
4822 264 50149	10P male gold plated	2170	4822 124 40195	150μF 20% 16V	2383	4822 122 32442	10nF 50V	268
		2171	4822 122 32862	10nF 80% 50V	2384	5322 122 31647	1nF 10% 63V	269
		2172	4822 124 41506	47μF 20% 16V	2385	4822 122 32442	10nF 50V	269
4822 264 40207	3P male	2193	4822 122 32153	1,8nF 10% 63V	2386	4822 122 32862	10nF 80% 50V	269
4822 264 40207	3P male	2194	4822 122 32153	1,8nF 10% 63V	2387	4822 124 40435	10μF 20% 50V	269
4822 264 50149	10P male gold plated	2196	4822 124 22606	68μF 20% 16V	2388	5322 122 33446	3,3nF 10% 63V	269
4822 264 50149	10P male gold plated	2197	4822 124 22606	68μF 20% 16V	2390	4822 122 32863	22nF 80% 50V	269
		2216	4822 122 31947	100nF 20% 63V	2391	4822 122 32863	22nF 80% 50V	269
		2219	4822 122 32927	220nF	2392	4822 122 32863	22nF 80% 50V	269
4822 264 50149	10P male gold plated	2225	4822 124 41554	220μF 20% 10V	2395	4822 122 32863	22nF 80% 50V	269
		2226	4822 121 42408	220nF 5% 63V	2396	4822 122 32863	22nF 80% 50V	270
4822 265 20512	2P	2228	4822 122 32927	220nF	2397	4822 122 32863	22nF 80% 50V	270
4822 265 40442	10P male	2234	4822 121 42408	220nF 5% 63V	2398	4822 124 40435	10μF 20% 50V	270
4822 265 40442	10P male	2240	4822 122 32927	220nF	2399	4822 124 41506	47μF 20% 16V	270
4822 264 40207	3P male	2241	4822 121 42408	220nF 5% 63V	2400	4822 122 32863	22nF 80% 50V	270
4822 264 40207	3P male	2242	4822 124 40196	220μF 20% 16V	2433	4822 122 32863	22nF 80% 50V	271
4822 265 40442	10P male	2243	4822 121 42408	220nF 5% 63V	2434	5322 122 33446	3,3nF 10% 63V	271
4822 265 40442	10P male							
4822 265 20509	2P	2245	4822 122 32927	220nF	2435	5322 122 33446	3,3nF 10% 63V	272
4822 265 30828	5P male	2249	4822 122 32862	10nF 80% 50V	2436	4822 122 31961	68pF 5% 63V	272
4822 265 30899	5P male	2250	4822 051 10102	1k 2% 0,25W	2438	4822 122 32863	22nF 80% 50V	272
Various parts		2252	4822 121 42408	220nF 5% 63V	2440	4822 122 32863	22nF 80% 50V	272
		2253	4822 122 32863	22nF 80% 50V	2442	4822 122 32863	22nF 80% 50V	272
		2254	4822 122 32927	220nF	2445	4822 122 32927	220nF	273
4822 267 60307	socket SVHS	2255	4822 124 41643	100μF 20% 16V	2446	4822 122 32927	220nF	273
4822 267 60304	socket SCART + 4xCINCH	2257	4822 122 33496	100nF 10% 63V	2447	4822 122 32927	220nF	
4822 267 51058	socket SCART	2258	4822 122 31765	100pF 5% 50V	2451	5322 121 42661	330nF 5% 63V	
4822 267 51099	socket 2xCINCH + 1xSVHS	2260	4822 122 31947	100nF 20% 63V	2452	4822 124 40242	1μF 20% 63V	310
4822 267 51098	socket HEADPH. + CINCH	2268	4822 122 31947	100nF 20% 63V	2453	4822 122 31774	56pF 5% 50V	310
4822 218 20986	keyboard	2269	4822 122 32482	22pF 5% 63V	2454	4822 122 32444	33pF 5% 50V	310
4822 267 60307	socket SVHS	2270	4822 122 32863	22nF 80% 50V	2455	4822 122 32444	33pF 5% 50V	310
4822 255 40901	socket 40 POLE	2274	4822 122 32862	10nF 80% 50V	2456	4822 122 32444	33pF 5% 50V	310
1100	4822 212 23281	2301	5322 122 31647	1nF 10% 63V	2476	4822 124 41577	4,7μF 20% 50V	311
1160	4822 210 10409	2305	4822 122 32444	33pF 5% 50V	2478	4822 122 31784	4,7nF 10% 50V	311
1160	4822 210 10416	2306	4822 122 31772	47pF 5% 50V	2479	4822 122 32863	22nF 80% 50V	311
1160	4822 210 10412	2307	4822 122 31971	10pF 10% 50V	2480	4822 124 40272	33μF 20% 16V	311
1231	4822 242 80364	2310	4822 122 31961	68pF 5% 63V	2600	4822 122 31947	100nF 20% 63V	312
1248	4822 242 80364	2311	4822 122 31808	150pF 10% 50V	2602	4822 122 31947	100nF 20% 63V	312
1379	4822 242 70736	2312	4822 122 32863	22nF 80% 50V	2604	4822 122 31947	100nF 20% 63V	312
		2318	4822 121 42408	220nF 5% 63V	2606	4822 122 31947	100nF 20% 63V	312
1380	4822 242 70304	2324	4822 122 32863	22nF 80% 50V	2608	4822 122 32927	220nF	312
		2338	4822 122 31772	47pF 5% 50V	2620	4822 122 33496	100nF 10% 63V	312
1602	4822 242 73857	2342	4822 122 31972	39pF 5% 50V	2621	4822 122 33496	100nF 10% 63V	312
		2343	4822 122 31727	470pF 5% 63V	2622	4822 122 33496	100nF 10% 63V	312
		2344	4822 122 31775	680pF 5% 50V	2623	4822 122 33496	100nF 10% 63V	312
		2345	4822 122 31807	1200pF 5% 50V	2624	5322 122 31842	330pF 5% 63V	312
		2346	4822 051 10008	0Ω 5% 0,25W	2626	4822 121 42408	220nF 5% 63V	313
		2347	5322 122 31647	1nF 10% 63V	2627	4822 124 41678	22μF 20% 25V	313
		2353	4822 122 32862	10nF 80% 50V	2628	5322 122 31842	330pF 5% 63V	313
2100	4822 124 40684	2360	4822 124 40272	33μF 20% 16V	2630	4822 122 32927	220nF	313
2114	4822 124 22606	2361	4822 124 40849	330μF 20% 16V	2632	5322 122 31842	330pF 5% 63V	313
2118	4822 122 31797	2365	4822 122 31352	180pF 2% 100V	2634	4822 121 42408	220nF 5% 63V	313
2119	4822 122 31797	2366	4822 122 32863	22nF 80% 50V	2636	5322 122 31842	330pF 5% 63V	313
2120	4822 122 32863	2367	4822 122 32862	10nF 80% 50V	2638	4822 121 42408	220nF 5% 63V	313
2121	5322 122 31647	2368	4822 122 32862	10nF 80% 50V	2640	5322 122 31842	330pF 5% 63V	313
2122	4822 122 32442	2369	4822 122 31825	27pF 10% 50V	2642	4822 122 32927	220nF	314
2123	4822 126 11804	2371	4822 122 31825	27pF 10% 50V	2644	5322 122 31842	330pF 5% 63V	314
2130	4822 122 31797	2372	4822 122 31965	220pF 5% 63V	2646	4822 122 32927	220nF	314
2131	4822 124 22606	2373	4822 122 31965	220pF 5% 63V	2658	4822 122 31961	68pF 5% 63V	314
2132	4822 122 31797	2374	4822 122 32863	22nF 80% 50V	2659	4822 122 31961	68pF 5% 63V	314
2137	4822 122 32442	2374	4822 051 10008	0Ω 5% 0,25W	2660	5322 122 31647	1nF 10% 63V	314


Small signal panel (continued)

									
0% 50V	2662	5322 122 31647	1nF 10% 63V	3146	4822 050 11002	1k 1% 0,4W	3237	4822 116 52217	270Ω 5% 0,5W
0V	2664	4822 122 32153	1,8nF 10% 63V	3148	4822 051 10473	47k 2% 0,25W	3238	4822 116 52222	390Ω 5% 0,5W
5% 63V	2666	4822 122 32153	1,8nF 10% 63V	3149	4822 051 10473	47k 2% 0,25W	3239	4822 051 10271	270Ω 2% 0,25W
20% 63V	2680	4822 122 31947	100nF 20% 63V	3150	4822 051 10473	47k 2% 0,25W	3240	4822 051 10759	75Ω 2% 0,25W
m.	2681	4822 122 32542	47nF 10% 63V	3151	4822 051 10562	5k6 2% 0,25W	3241	4822 051 10759	75Ω 2% 0,25W
m.	2682	4822 124 40195	150μF 20% 16V	3153	4822 051 10103	10k 2% 0,25W	3242	4822 116 52219	330Ω 5% 0,5W
5% 63V	2684	4822 121 51252	470nF 5% 63V	3154	4822 051 10152	1k5 2% 0,25W	3243	4822 051 10152	1k5 2% 0,25W
% 63V	2686	4822 121 51252	470nF 5% 63V	3155	4822 051 10104	100k 2% 0,25W	3244	4822 051 10102	1k 2% 0,25W
0V	2688	4822 122 31782	15nF 10% 50V	3156	4822 051 10562	5k6 2% 0,25W	3245	4822 051 10474	470k 2% 0,25W
% 63V	2690	4822 122 31782	15nF 10% 50V	3157	4822 050 11002	1k 1% 0,4W	3246	4822 051 10331	330Ω 2% 0,25W
0V	2692	4822 122 31981	33nF + -0,5pF 50V	3158	4822 050 11002	1k 1% 0,4W	3247	4822 051 10102	1k 2% 0,25W
0% 50V	2694	4822 122 31916	5,6nF 10% 63V	3159	4822 051 10103	10k 2% 0,25W	3248	4822 051 10681	680Ω 2% 0,25W
0% 63V	2696	4822 122 31981	33nF + -0,5pF 50V	3160	4822 052 10758	7Ω5 5% 0,33W	3249	4822 051 10102	1k 2% 0,25W
0% 50V	2697	4822 122 31965	220pF 5% 63V	3161	4822 051 10103	10k 2% 0,25W	3251	4822 051 10759	75Ω 2% 0,25W
0% 50V	2698	4822 122 31916	5,6nF 10% 63V	3162	4822 050 27508	7Ω5 1% 0,6W	3252	4822 051 10759	75Ω 2% 0,25W
0% 50V	2699	4822 122 31965	220pF 5% 63V	3163	4822 051 10223	22k 2% 0,25W	3253	4822 051 10561	560Ω 2% 0,25W
0% 50V	2700	4822 124 40242	1μF 20% 63V	3164	4822 051 10101	100Ω 2% 0,25W	3254	4822 116 81193	15Ω 5% 0,3W
0% 50V	2702	4822 124 40242	1μF 20% 63V	3165	4822 051 10101	100Ω 2% 0,25W	3255	4822 051 10821	820Ω 2% 0,25W
0% 50V	2704	4822 122 31644	2,2nF 10% 63V	3166	4822 052 10228	2Ω2 5% 0,33W	3256	4822 051 10103	10k 2% 0,25W
0% 18V	2706	4822 124 41678	22μF 20% 25V	3167	4822 051 10122	1k2 2% 0,25W	3257	4822 051 10103	10k 2% 0,25W
0% 50V	2707	4822 122 31784	4,7nF 10% 50V	3168	4822 051 10242	2k4 2% 0,25W	3259	4822 051 10103	10k 2% 0,25W
0% 50V	2714	4822 122 32863	22nF 80% 50V	3169	4822 116 52175	100Ω 5% 0,5W	3260	4822 116 81193	15Ω 5% 0,3W
0% 63V	2716	4822 122 32597	6,8nF 10% 63V	3170	4822 116 82772	3Ω9 5% 0,3W	3261	4822 051 10471	470Ω 2% 0,25W
0% 63V	2720	4822 124 41678	22μF 20% 25V	3171	4822 052 11511	510Ω 5% 0,5W	3262	4822 051 10103	10k 2% 0,25W
% 63V	2721	4822 122 31784	4,7nF 10% 50V	3172	4822 111 41424	22Ω 5% 0,3W	3263	4822 051 10689	68Ω 2% 0,25W
0% 50V	2726	4822 122 31644	2,2nF 10% 63V	3180	4822 116 52224	470Ω 5% 0,5W	3264	4822 051 10471	470Ω 2% 0,25W
0% 50V	2727	4822 124 40435	10μF 20% 50V	3181	4822 051 10822	8k2 2% 0,25W	3265	4822 051 10103	10k 2% 0,25W
0% 50V	2728	4822 124 40435	10μF 20% 50V	3182	4822 116 52214	200Ω 5% 0,5W	3266	4822 051 10103	10k 2% 0,25W
0% 50V	2734	4822 122 32863	22nF 80% 50V	3183	4822 116 52233	10k 5% 0,5W	3267	4822 051 10103	10k 2% 0,25W
0% 63V	2736	4822 122 32597	6,8nF 10% 63V	3184	4822 116 90536	120Ω 1% 0,125W	3268	4822 051 10101	100Ω 2% 0,25W
0% 63V	3100	4822 051 10102	1k 2% 0,25W	3185	4822 051 10471	470Ω 2% 0,25W	3269	4822 051 10561	560Ω 2% 0,25W
0% 50V	3101	4822 116 52175	100Ω 5% 0,5W	3186	4822 116 52256	2k2 5% 0,5W	3270	4822 051 10472	4k7 2% 0,25W
0% 50V	3103	4822 051 10101	100Ω 2% 0,25W	3187	4822 051 10759	75Ω 2% 0,25W	3271	4822 051 10471	470Ω 2% 0,25W
0% 50V	3104	4822 116 52175	100Ω 5% 0,5W	3188	4822 051 20222	2k2 5% 0,1W	3272	4822 116 52228	680Ω 5% 0,5W
0% 50V	3105	4822 051 10101	100Ω 2% 0,25W	3189	4822 051 10223	22k 2% 0,25W	3273	4822 051 10471	470Ω 2% 0,25W
0% 50V	3115	4822 116 52175	100Ω 5% 0,5W	3191	4822 116 81202	62k 1% 0,125W	3274	4822 051 10103	10k 2% 0,25W
0% 50V	3116	4822 116 52175	100Ω 5% 0,5W	3193	4822 051 10331	330Ω 2% 0,25W	3275	4822 051 10689	68Ω 2% 0,25W
0% 16V	3117	4822 051 20222	2k2 5% 0,1W	3194	4822 051 10331	330Ω 2% 0,25W	3276	4822 051 10471	470Ω 2% 0,25W
0% 63V	3119	4822 051 20222	2k2 5% 0,1W	3196	4822 051 10473	47k 2% 0,25W	3277	4822 051 10271	270Ω 2% 0,25W
0% 63V	3120	4822 051 20222	2k2 5% 0,1W	3197	4822 051 10473	47k 2% 0,25W	3279	4822 051 10689	68Ω 2% 0,25W
0% 63V	3121	4822 051 10123	12k 2% 0,25W	3200	4822 051 10472	4k7 2% 0,25W	3281	4822 116 52201	75Ω 5% 0,5W
0% 63V	3122	4822 051 10472	4k7 2% 0,25W	3201	4822 051 10472	4k7 2% 0,25W	3285	4822 051 10103	10k 2% 0,25W
0% 63V	3123	4822 051 10472	4k7 2% 0,25W	3205	4822 051 10759	75Ω 2% 0,25W	3286	4822 051 10103	10k 2% 0,25W
0% 63V	3124	4822 051 10101	100Ω 2% 0,25W	3206	4822 051 10759	75Ω 2% 0,25W	3300	4822 051 10103	10k 2% 0,25W
0% 63V	3125	4822 051 10101	100Ω 2% 0,25W	3207	4822 051 10759	75Ω 2% 0,25W	3301	4822 051 10332	3k3 2% 0,25W
0% 63V	3126	4822 051 10101	100Ω 2% 0,25W	3208	4822 051 10101	100Ω 2% 0,25W	3303	4822 051 10361	360Ω 2% 0,25W
0% 63V	3127	4822 051 10101	100Ω 2% 0,25W	3209	4822 051 10101	100Ω 2% 0,25W	3303	4822 051 10241	240Ω 2% 0,25W
0% 63V	3128	4822 051 10471	470Ω 2% 0,25W	3210	4822 051 10101	100Ω 2% 0,25W	3304	4822 116 90536	120Ω 1% 0,125W
0% 63V	3129	4822 116 52175	100Ω 5% 0,5W	3211	4822 116 52217	270Ω 5% 0,5W	3305	4822 051 10104	100k 2% 0,25W
0% 25V	3131	4822 116 52175	100Ω 5% 0,5W	3215	4822 051 10689	68Ω 2% 0,25W	3306	4822 051 10221	220Ω 2% 0,25W
0% 63V	3132	4822 116 52175	100Ω 5% 0,5W	3216	4822 116 81193	15Ω 5% 0,3W	3310	4822 116 52283	4k7 5% 0,5W
0% 63V	3133	4822 051 10151	150Ω 2% 0,25W	3217	4822 116 52224	470Ω 5% 0,5W	3311	4822 051 10132	1k3 2% 0,25W
0% 63V	3134	4822 116 52175	100Ω 5% 0,5W	3218	4822 051 10471	470Ω 2% 0,25W	3312	4822 051 10511	510Ω 2% 0,25W
0% 63V	3135	4822 051 10101	100Ω 2% 0,25W	3219	4822 051 10471	470Ω 2% 0,25W	3313	4822 051 20222	2k2 5% 0,1W
0% 63V	3136	4822 051 10101	100Ω 2% 0,25W	3220	4822 051 10471	470Ω 2% 0,25W	3314	4822 051 10102	1k 2% 0,25W
0% 63V	3137	4822 116 52183	16Ω 5% 0,5W	3222	4822 116 52217	270Ω 5% 0,5W	3315	4822 051 10103	10k 2% 0,25W
0% 63V	3138	4822 116 52175	100Ω 5% 0,5W	3224	4822 051 10759	75Ω 2% 0,25W	3316	4822 051 10112	1k1 2% 0,25W
0% 63V	3139	4822 116 52175	100Ω 5% 0,5W	3225	4822 051 10471	470Ω 2% 0,25W	3317	4822 116 52233	10k 5% 0,5W
0% 63V	3140	4822 050 11002	1k 1% 0,4W	3226	4822 051 10152	1k5 2% 0,25W	3324	4822 051 10223	22k 2% 0,25W
0% 63V	3141	4822 050 11002	1k 1% 0,4W	3227	4822 051 10112	1k1 2% 0,25W	3325	4822 051 10682	6k8 2% 0,25W
0% 63V	3142	4822 050 11002	1k 1% 0,4W	3228	4822 051 10474	470k 2% 0,25W	3326	4822 051 10103	10k 2% 0,25W
0% 63V	3143	4822 050 11002	1k 1% 0,4W	3229	4822 051 10331	330Ω 2% 0,25W	3327	4822 051 10122	1k2 2% 0,25W
0% 63V	3144	4822 050 11002	1k 1% 0,4W	3230	4822 050 11002	1k 1% 0,4W	3329	4822 051 10118	1Ω1 5% 0,25W
0% 63V	3145	4822 050 11002	1k 1% 0,4W	3231	4822 051 10681	680Ω 2% 0,25W	3336	4822 051 10472	4k7 2% 0,25W
				3232	4822 051 10102	1k 2% 0,25W	3338	4822 051 10391	390Ω 2% 0,25W
				3233	4822 051 10102	1k 2% 0,25W	3339	4822 051 10153	15k 2% 0,25W
				3234	4822 051 10759	75Ω 2% 0,25W	3342	4822 051 20222	2k2 5% 0,1W
				3235	4822 051 10759	75Ω 2% 0,25W	3344	4822 051 10273	27k 2% 0,25W

Small signal panel (continued)

						Jumpers		
3350	4822 116 90536	120Ω 1% 0,125W	3644	4822 051 10102	1k 2% 0,25W	4235	4822 051 10008	0Ω 5% 0,25W
3351	4822 051 10472	4k7 2% 0,25W	3646	4822 051 10184	180k 2% 0,25W	4236	4822 051 10008	0Ω 5% 0,25W
3353	4822 051 10332	3k3 2% 0,25W	3650	4822 051 10392	3k9 2% 0,25W	4241	4822 051 10008	0Ω 5% 0,25W
3360	4822 052 10278	207 5% 0,33W	3651	4822 051 10123	12k 2% 0,25W	4246	4822 051 10008	0Ω 5% 0,25W
3361	4822 051 10102	1k 2% 0,25W	3652	4822 051 10392	3k9 2% 0,25W	4255	4822 051 10008	0Ω 5% 0,25W
3369	4822 051 10331	330Ω 2% 0,25W	3653	4822 051 10123	12k 2% 0,25W	4260	4822 051 10008	0Ω 5% 0,25W
3370	4822 100 11391	330Ω 30% LIN	3654	4822 116 52244	15k 5% 0,5W	4262	4822 051 10008	0Ω 5% 0,25W
3371	4822 051 10431	430Ω 2% 0,25W	3660	4822 051 10331	330Ω 2% 0,25W	4280	4822 051 10008	0Ω 5% 0,25W
3372	4822 051 10331	330Ω 2% 0,25W	3662	4822 051 10151	150Ω 2% 0,25W	4302	4822 051 10008	0Ω 5% 0,25W
3375	4822 051 10008	0Ω 5% 0,25W	3664	4822 051 10331	330Ω 2% 0,25W	4319	4822 051 10008	0Ω 5% 0,25W
3377	4822 051 10332	3k3 2% 0,25W	3665	4822 116 81193	15Ω 5% 0,3W	4320	4822 051 10008	0Ω 5% 0,25W
3380	4822 050 11002	1k 1% 0,4W	3666	4822 051 10151	150Ω 2% 0,25W	4321	4822 051 10008	0Ω 5% 0,25W
3382	4822 051 20222	2k2 5% 0,1W	3668	4822 051 10331	330Ω 2% 0,25W	4322	4822 051 10008	0Ω 5% 0,25W
3383	4822 051 10103	10k 2% 0,25W	3672	4822 051 10331	330Ω 2% 0,25W	4330	4822 051 10008	0Ω 5% 0,25W
3385	4822 051 10105	1M 5% 0,25W	3680	4822 052 10279	27Ω 5% 0,33W	4331	4822 051 10008	0Ω 5% 0,25W
3387	4822 050 11002	1k 1% 0,4W	3682	4822 051 10568	506 5% 0,25W	4360	4822 051 10008	0Ω 5% 0,25W
3389	4822 051 10182	1k8 2% 0,25W	3684	4822 116 52175	100Ω 5% 0,5W	4361	4822 051 10008	0Ω 5% 0,25W
3390	4822 051 10911	910Ω 2% 0,25W	3686	4822 116 52175	100Ω 5% 0,5W	4377	4822 051 10008	0Ω 5% 0,25W
3391	4822 051 20222	2k2 5% 0,1W	3700	4822 116 52263	2k7 5% 0,5W	4420	4822 051 10008	0Ω 5% 0,25W
3392	4822 051 10101	100Ω 2% 0,25W	3702	4822 051 10223	22k 2% 0,25W	4440	4822 051 10008	0Ω 5% 0,25W
3393	4822 051 10101	100Ω 2% 0,25W	3704	4822 051 10102	1k 2% 0,25W	4450	4822 051 10008	0Ω 5% 0,25W
3394	4822 051 10101	100Ω 2% 0,25W	3706	4822 116 81203	10Ω 5% 0,3W	4452	4822 051 10008	0Ω 5% 0,25W
3395	4822 051 10471	470Ω 2% 0,25W	3708	4822 051 10101	100Ω 2% 0,25W	4455	4822 051 10008	0Ω 5% 0,25W
3396	4822 051 20222	2k2 5% 0,1W	3710	4822 051 20183	18k 5% 0,1W	4476	4822 051 10008	0Ω 5% 0,25W
3397	4822 111 41424	22Ω 5% 0,3W	3712	4822 116 52203	91Ω 5% 0,5W	4477	4822 051 10008	0Ω 5% 0,25W
3398	4822 116 52175	100Ω 5% 0,5W	3713	4822 116 52203	91Ω 5% 0,5W	4496	4822 051 10008	0Ω 5% 0,25W
3399	4822 116 52175	100Ω 5% 0,5W	3714	4822 051 10828	8Ω 5% 0,25W	4498	4822 051 10008	0Ω 5% 0,25W
3400	4822 051 10471	470Ω 2% 0,25W	3720	4822 116 81203	10Ω 5% 0,3W	4610	4822 051 10008	0Ω 5% 0,25W
3410	4822 116 52224	470Ω 5% 0,5W	3722	4822 116 52263	2k7 5% 0,5W	4672	4822 051 10008	0Ω 5% 0,25W
3425	4822 116 52224	470Ω 5% 0,5W	3724	4822 051 10223	22k 2% 0,25W	4673	4822 051 10008	0Ω 5% 0,25W
3426	4822 116 52224	470Ω 5% 0,5W	3726	4822 051 10102	1k 2% 0,25W			
3450	4822 051 20222	2k2 5% 0,1W	3728	4822 051 10101	100Ω 2% 0,25W	5100	4822 157 53906	47μH 10%
3451	4822 051 10432	4k3 2% 0,25W	3730	4822 051 20183	18k 5% 0,1W	5115	4822 152 20677	10μH 10%
3453	4822 051 10511	510Ω 2% 0,25W	3732	4822 116 52203	91Ω 5% 0,5W	5270	4822 157 52983	22μH 10%
3454	4822 051 10101	100Ω 2% 0,25W	3733	4822 116 52203	91Ω 5% 0,5W	5303	4822 157 53302	1μH 20%
3455	4822 051 10101	100Ω 2% 0,25W	3734	4822 051 10828	8Ω 5% 0,25W	5304	4822 157 53302	1μH 20%
3456	4822 051 10101	100Ω 2% 0,25W	Jumpers			5305	4822 157 62823	26μH 6%
3465	4822 050 11002	1k 1% 0,4W	4066	4822 051 10008	0Ω 5% 0,25W	5310	4822 157 63245	82μH 10%
3475	4822 051 10124	120k 2% 0,25W	4100	4822 051 10008	0Ω 5% 0,25W	5345	4822 157 62822	4,5μH 6%
3476	4822 051 10154	150k 2% 0,25W	4105	4822 051 10008	0Ω 5% 0,25W	5346	4822 157 62823	26μH 6%
3477	4822 116 52286	5k1 5% 0,5W	4106	4822 051 10008	0Ω 5% 0,25W	5370	4822 157 62824	7,5μH 6%
3478	4822 051 10471	470Ω 2% 0,25W	4107	4822 051 10008	0Ω 5% 0,25W	5454	4822 157 63065	0,68μH 20%
3479	4822 051 10223	22k 2% 0,25W	4108	4822 051 10008	0Ω 5% 0,25W	5455	4822 157 63065	0,68μH 20%
3480	4822 052 10278	207 5% 0,33W	4109	4822 051 10008	0Ω 5% 0,25W	5456	4822 157 63065	0,68μH 20%
3481	4822 052 10278	207 5% 0,33W	4111	4822 051 10008	0Ω 5% 0,25W			
3482	4822 116 52223	430Ω 5% 0,5W	4112	4822 051 10008	0Ω 5% 0,25W	6117	4822 130 80906	LLZ-F7V5
3483	4822 116 52175	100Ω 5% 0,5W	4114	4822 051 10008	0Ω 5% 0,25W	6120	4822 130 80446	LL4148
3600	4822 051 10362	3k6 2% 0,25W	4115	4822 051 10008	0Ω 5% 0,25W	6121	4822 130 80446	LL4148
3602	4822 100 11212	2k2 30% LIN	4120	4822 051 10008	0Ω 5% 0,25W	6163	4822 130 81226	LLZ-F33
3603	4822 051 10332	3k3 2% 0,25W	4121	4822 051 10008	0Ω 5% 0,25W	6168	4822 130 80446	LL4148
3604	4822 051 10182	1k8 2% 0,25W	4125	4822 051 10008	0Ω 5% 0,25W	6172	4822 130 80906	LLZ-C7V5
3605	4822 051 10472	4k7 2% 0,25W	4127	4822 051 10008	0Ω 5% 0,25W	6173	4822 130 80446	LL4148
3606	4822 052 10279	27Ω 5% 0,33W	4130	4822 051 10008	0Ω 5% 0,25W	6178	4822 130 81222	LLZ-C15
3608	4822 051 10101	100Ω 2% 0,25W	4148	4822 051 10008	0Ω 5% 0,25W	6205	4822 130 81015	LLZ-C10
3610	4822 051 10101	100Ω 2% 0,25W	4162	4822 051 10008	0Ω 5% 0,25W	6206	4822 130 81015	LLZ-C10
3612	4822 051 10102	1k 2% 0,25W	4164	4822 051 10008	0Ω 5% 0,25W	6207	4822 130 81015	LLZ-C10
3620	4822 051 10184	180k 2% 0,25W	4166	4822 051 10008	0Ω 5% 0,25W	6280	4822 130 80446	LL4148
3622	4822 051 10184	180k 2% 0,25W	4170	4822 051 10008	0Ω 5% 0,25W	6281	4822 130 80446	LL4148
3624	4822 051 10102	1k 2% 0,25W	4171	4822 051 10008	0Ω 5% 0,25W	6342	4822 130 80888	BA682
3626	4822 051 10184	180k 2% 0,25W	4184	4822 051 10008	0Ω 5% 0,25W	6343	4822 130 80888	BA682
3628	4822 051 10102	1k 2% 0,25W	4200	4822 051 10008	0Ω 5% 0,25W	6386	4822 130 80446	LL4148
3630	4822 051 10184	180k 2% 0,25W	4201	4822 051 10008	0Ω 5% 0,25W	6387	4822 130 80954	LLZ-C5V6
3632	4822 051 10102	1k 2% 0,25W	4203	4822 051 10008	0Ω 5% 0,25W	6450	4822 130 81512	LLZ-C6V2
3634	4822 051 10184	180k 2% 0,25W	4205	4822 051 10008	0Ω 5% 0,25W	6465	4822 130 80446	LL4148
3636	4822 051 10102	1k 2% 0,25W	4210	4822 051 10008	0Ω 5% 0,25W	6470	4822 130 80446	LL4148
3638	4822 051 10184	180k 2% 0,25W	4227	4822 051 10008	0Ω 5% 0,25W			
3640	4822 051 10102	1k 2% 0,25W	4234	4822 051 10008	0Ω 5% 0,25W			
3642	4822 051 10184	180k 2% 0,25W						

Small s



6471	4
6478	4
6479	4
6480	4
6610	4
6660	4
6661	4
6662	4
6663	4
6664	4
6665	4
	
7000	5
7119	5
7120	5
7121	4
7130	5
7137	4
7176	4
7177	4
7178	5
7182	5
7183	5
7186	4
7188	5
7193	4
7216	4
7219	4
7226	5
7228	5
7243	5
7244	5
7258	5
7260	4
7261	5
7265	5
7268	4
7270	5
7273	4
7305	5
7311	5
7312	5
7313	4
7314	5
7315	5
7324	4
7326	5
7338	5
7350	5
7360	4
7365	4
7366	4
7390	4
7395	4
7410	4
7430	4
7450	5
7451	5
7480	5
7600	4
7620	4
7622	4
7630	4
7635	4
7660	5
7661	5

Small signal panel (continued)



6471 4822 130 30621 1N4148
 6478 4822 130 82345 LLZ-C22
 6479 4822 130 80877 BAV103
 6480 4822 130 82348 LLZ-F9V1
 6610 4822 130 30621 1N4148
 6660 4822 130 80446 LL4148
 6661 4822 130 81223 LLZ-C2V4
 6662 4822 130 80446 LL4148
 6663 4822 130 81223 LLZ-C2V4
 6664 4822 130 80446 LL4148
 6665 4822 130 80446 LL4148



7000 5322 130 44921 BD943
 7119 5322 130 41982 BC848B
 7120 5322 130 41982 BC848B
 7121 4822 130 42513 BC858C
 7130 5322 130 42136 BC848C
 7137 4822 209 71521 X2404
 7176 4822 130 42513 BC858C
 7177 4822 130 42513 BC858C
 7178 5322 130 41982 BC848B
 7182 5322 130 44743 BSR12
 7183 5322 130 41982 BC848B
 7186 4822 209 73852 PMBT2369
 7188 5322 130 41982 BC848B
 7193 4822 209 61115 LF353N
 7216 4822 130 42615 BC817-40
 7219 4822 209 63292 TEA6414
 7226 5322 130 41983 BC858B
 7228 5322 130 41982 BC848B
 7243 5322 130 41983 BC858B
 7244 5322 130 41982 BC848B
 7258 5322 209 10421 HEF4094BP
 7260 4822 130 42615 BC817-40
 7261 5322 130 42136 BC848C
 7265 5322 130 41982 BC848B
 7268 4822 130 42615 BC817-40
 7270 5322 130 41982 BC848B
 7273 4822 130 42615 BC817-40
 7305 5322 130 41983 BC858B
 7311 5322 130 41982 BC848B
 7312 5322 130 42136 BC848C
 7313 4822 130 42513 BC858C
 7314 5322 130 42136 BC848C
 7315 5322 130 42136 BC848C
 7324 4822 209 63901 TDA4568/V2
 7326 5322 130 42136 BC848C
 7338 5322 130 41982 BC848B
 7350 5322 130 41982 BC848B
 7360 4822 130 42615 BC817-40
 7365 4822 209 30011 TDA4650/V4
 7366 4822 209 63108 TDA4660/V2S2
 7390 4822 130 42513 BC858C
 7395 4822 209 30394 TDA8443B/C1
 7410 4822 209 73852 PMBT2369
 7430 4822 209 63298 TDA4680/V4
 7450 5322 130 42136 BC848C
 7451 5322 130 42755 BC847C
 7480 5322 130 44921 BD943
 7600 4822 209 63967 TDA8417/V2
 7620 4822 209 10263 4052B
 7622 4822 209 10263 4052B
 7630 4822 209 61115 LF353N
 7635 4822 209 61115 LF353N
 7660 5322 130 41982 BC848B
 7661 5322 130 41982 BC848B



7662 5322 130 41982 BC848B
 7680 4822 209 63734 TDA8425/V7
 7704 4822 209 83163 LM833N
 7706 5322 130 41982 BC848B
 7708 5322 130 41983 BC858B
 7730 5322 130 41982 BC848B
 7732 5322 130 41983 BC858B

16/9 identification panel **A C**

4822 265 41152 8P
 4822 290 40295 8P
 4822 265 20509 2P male
 4822 264 40207 3P male



2457 4822 122 31797 22nF 10% 63V
 2458 4822 122 31797 22nF 10% 63V
 2459 4822 122 31797 22nF 10% 63V
 2460 4822 122 31797 22nF 10% 63V




3457 4822 051 10153 15k 2% 0,25W
 3459 4822 051 10103 10k 2% 0,25W
 3462 4822 051 10153 15k 2% 0,25W
 3463 4822 051 10103 10k 2% 0,25W
 3464 4822 051 10472 4k7 2% 0,25W
 3465 4822 051 10472 4k7 2% 0,25W
 3466 4822 051 10151 150Ω 2% 0,25W
 3467 4822 051 10101 100Ω 2% 0,25W
 3468 4822 051 10101 100Ω 2% 0,25W
 3469 4822 051 10223 22k 2% 0,25W
 3470 4822 051 10823 82k 2% 0,25W
 3471 4822 051 10008 0Ω 5% 0,25W

Jumpers

4402 4822 051 10008 0Ω 5% 0,25W
 4403 4822 051 10008 0Ω 5% 0,25W



6451 4822 130 80446 LL4148
 6452 4822 130 80446 LL4148




7452 5322 209 10883 PCF8574P
 7453 4822 130 42513 BC858C
 7454 4822 130 42513 BC858C
 7455 5322 130 41982 BC848B

High end-box **L M**

High

											
	4822 255 40901	IC socket 40P	2152	4822 122 31766	120pF 5% 50V	2230	4822 122 32142	270pF 5% 63V	313		
	4822 267 70257	IC socket 48P	2153	4822 126 11492	220nF 10% 50V	2233	4822 122 31965	220pF 5% 63V	313		
	4822 267 60253	IC socket 22P	2154	4822 122 33496	100nF 10% 63V	2235	4822 122 33498	2,7nF 10% 63V	314		
	4822 267 60253	IC socket 22P	2156	4822 122 31765	100pF 5% 50V	2236	4822 122 32891	68nF 10% 63V	314		
	4822 267 50885	IC socket 16P.	2157	4822 122 31765	100pF 5% 50V	2237	4822 122 33496	100nF 10% 63V	314		
	4822 267 50885	IC socket 16P.	2158	4822 122 33496	100nF 10% 63V	2250	4822 122 33496	100nF 10% 63V	314		
	4822 267 50885	IC socket 16P.	2160	4822 122 31765	100pF 5% 50V	2251	4822 124 41554	220µF 20% 10V	314		
	4822 265 40472	10P gold plated	2161	4822 122 31765	100pF 5% 50V	2252	4822 122 33496	100nF 10% 63V	314		
	4822 265 40472	10P gold plated	2162	4822 122 33496	100nF 10% 63V	2253	4822 121 51252	470nF 5% 63V	314		
	4822 265 40472	10P gold plated	2163	4822 122 33496	100nF 10% 63V	2254	4822 121 51252	470nF 5% 63V	314		
Various parts			2164	4822 122 33496	100nF 10% 63V	2255	4822 122 33496	100nF 10% 63V	314		
1100	4822 242 72572	crystal 12,000 000 MHz	2165	4822 122 31981	33nF + -0,5pF 50V	2256	4822 122 31965	220pF 5% 63V	315		
1200	4822 242 71417	crystal 13,875 000 MHz	2166	4822 122 33496	100nF 10% 63V	2257	4822 122 31965	220pF 5% 63V	315		
			2167	4822 122 33496	100nF 10% 63V	2258	4822 122 31769	18pF 5% 50V	315		
2100	4822 122 32999	2,2N 5% 63V	2168	4822 122 33496	100nF 10% 63V	2259	4822 122 31774	56pF 5% 50V	315		
2101	4822 122 32999	2,2N 5% 63V	2169	4822 122 33496	100nF 10% 63V	2260	4822 122 31774	56pF 5% 50V	315		
2102	4822 122 31825	27pF 10% 50V	2170	4822 122 33496	100nF 10% 63V	2261	4822 122 33496	100nF 10% 63V	315		
2103	4822 122 31825	27pF 10% 50V	2171	4822 122 33496	100nF 10% 63V	2262	4822 124 41643	100µF 20% 16V	315		
2104	4822 124 40435	10µF 20% 50V	2172	4822 122 33496	100nF 10% 63V	2265	4822 124 41643	100µF 20% 16V	315		
2105	4822 122 33496	100nF 10% 63V	2173	4822 122 33496	100nF 10% 63V	2266	4822 122 33496	100nF 10% 63V	316		
2106	4822 122 33498	2,7nF 10% 63V	2174	4822 122 33496	100nF 10% 63V	2267	4822 122 33496	100nF 10% 63V	316		
2107	4822 124 40435	10µF 20% 50V	2175	4822 122 33496	100nF 10% 63V	2268	4822 124 41997	470µF 10V	316		
2108	4822 124 41506	47µF 20% 16V	2176	4822 122 33496	100nF 10% 63V	2269	4822 122 33496	100nF 10% 63V	316		
2109	4822 122 31965	220pF 5% 63V	2177	4822 122 33496	100nF 10% 63V	2270	4822 122 33496	100nF 10% 63V	316		
2110	4822 122 31965	220pF 5% 63V	2178	4822 122 33496	100nF 10% 63V	2271	4822 122 33496	100nF 10% 63V	316		
2111	5322 122 31842	330pF 5% 63V	2179	4822 122 31774	56pF 5% 50V	2272	4822 122 33496	100nF 10% 63V	316		
2112	4822 122 33496	100nF 10% 63V	2180	4822 122 31774	56pF 5% 50V	2273	4822 124 40731	330µF 20% 6,3V	316		
2113	5322 122 32163	5,6pF 5% 100V	2181	4822 122 33496	100nF 10% 63V	2274	4822 124 40435	10µF 20% 50V	316		
2114	4822 122 33496	100nF 10% 63V	2182	4822 122 33496	100nF 10% 63V	2275	4822 122 33496	100nF 10% 63V	317		
2115	4822 122 31965	220pF 5% 63V	2183	4822 122 33496	100nF 10% 63V	2276	4822 122 33496	100nF 10% 63V	317		
2116	4822 122 31965	220pF 5% 63V	2184	4822 122 31772	47pF 5% 50V	2277	4822 124 41506	47µF 20% 16V	317		
2117	5322 122 31842	330pF 5% 63V	2185	4822 122 31772	47pF 5% 50V				3001	4822 051 10339	33Ω 2% 0,25W
2118	4822 122 31981	33nF + -0,5pF 50V	2186	4822 122 32082	4,7pF 5% 50V	3001	4822 051 10399	39Ω 2% 0,25W	317		
2119	4822 126 11492	220nF 10% 50V	2187	4822 124 40435	10µF 20% 50V	3100	4822 051 20222	2k2 5% 0,1W	317		
2120	4822 122 31797	22nF 10% 63V	2188	4822 122 32999	2,2nF 5% 63V	3101	4822 051 20222	2k2 5% 0,1W	319		
2121	4822 122 31797	22nF 10% 63V	2189	4822 122 32442	10nF 50V	3102	4822 051 10473	47k 2% 0,25W	320		
2122	4822 122 32442	10nF 50V	2198	4822 122 31971	10pF 10% 50V	3103	4822 051 10473	47k 2% 0,25W	320		
2123	4822 122 33496	100nF 10% 63V	2199	4822 122 31772	47pF 5% 50V	3104	4822 051 10201	200Ω 2% 0,25W	320		
2124	4822 122 33496	100nF 10% 63V	2200	4822 124 41643	100µF 20% 16V	3106	4822 051 10752	7k5 2% 0,25W	320		
2125	4822 122 31971	10pF 10% 50V	2201	5322 122 31842	330pF 5% 63V	3107	4822 051 10562	5k6 2% 0,25W	320		
2126	4822 122 33496	100nF 10% 63V	2202	4822 124 41576	2,2µF 20% 50V	3108	4822 051 10331	330Ω 2% 0,25W	320		
2127	4822 122 33496	100nF 10% 63V	2203	4822 122 31825	27pF 10% 50V	3109	4822 051 10152	1k5 2% 0,25W	320		
2128	4822 122 33496	100nF 10% 63V	2204	4822 122 32442	10nF 50V	3110	4822 051 10102	1k 2% 0,25W	320		
2130	4822 122 31765	100pF 5% 50V	2205	4822 122 32442	10nF 50V	3111	4822 051 10473	47k 2% 0,25W	321		
2131	4822 122 31765	100pF 5% 50V	2206	4822 122 32504	15pF 5% 50V	3112	4822 051 10103	10k 2% 0,25W	321		
2133	4822 122 31765	100pF 5% 50V	2207	4822 122 31765	100pF 5% 50V	3113	4822 051 10109	10Ω 2% 0,25W	321		
2134	4822 122 31746	1000pF 5% 50V	2208	4822 122 32142	270pF 5% 63V	3114	4822 051 10104	100k 2% 0,25W	321		
2135	4822 122 31772	47pF 5% 50V	2209	4822 122 31797	22nF 10% 63V	3119	4822 051 10152	1k5 2% 0,25W	321		
2136	4822 122 31746	1000pF 5% 50V	2210	4822 122 31727	470pF 5% 63V	3120	4822 051 10332	3k3 2% 0,25W	321		
2137	4822 122 32504	15pF 5% 50V	2211	5322 122 31647	1nF 10% 63V	3121	4822 051 10472	4k7 2% 0,25W	321		
2138	4822 122 31971	10pF 10% 50V	2212	4822 122 32504	15pF 5% 50V	3122	4822 051 10473	47k 2% 0,25W	321		
2139	4822 122 31971	10pF 10% 50V	2213	4822 122 31765	100pF 5% 50V	3123	4822 051 10152	1k5 2% 0,25W	322		
2140	4822 122 31971	10pF 10% 50V	2214	4822 122 31765	100pF 5% 50V	3124	4822 051 10101	100Ω 2% 0,25W	322		
2141	4822 122 31772	47pF 5% 50V	2215	4822 124 41576	2,2µF 20% 50V	3125	4822 051 10109	10Ω 2% 0,25W	322		
2142	4822 122 31772	47pF 5% 50V	2216	4822 122 33496	100nF 10% 63V	3126	4822 051 10272	2k7 2% 0,25W	322		
2143	4822 122 31772	47pF 5% 50V	2217	4822 124 41576	2,2µF 20% 50V	3127	4822 051 10221	220Ω 2% 0,25W	322		
2144	4822 122 31772	47pF 5% 50V	2218	4822 124 41596	22µF 20% 50V	3128	4822 051 10472	4k7 2% 0,25W	322		
2146	4822 122 31746	1000pF 5% 50V	2219	4822 122 33496	100nF 10% 63V	3129	4822 051 10472	4k7 2% 0,25W	322		
2147	4822 122 32507	6,8pF 5% 50V	2220	4822 124 41577	4,7µF 20% 50V	3130	4822 051 10102	1k 2% 0,25W	322		
2148	4822 122 31746	1000pF 5% 50V	2221	4822 122 33496	100nF 10% 63V	3131	4822 051 10109	10Ω 2% 0,25W	322		
2149	4822 122 31746	1000pF 5% 50V	2222	4822 122 33496	100nF 10% 63V	3132	4822 051 10152	1k5 2% 0,25W	322		
2150	5322 121 42661	330nF 5% 63V	2223	4822 124 41643	100µF 20% 16V	3133	4822 051 10101	100Ω 2% 0,25W	323		
2151	4822 122 31768	180pF 5% 50V	2224	4822 121 42937	2,7nF 1% 250V	3134	4822 051 10221	220Ω 2% 0,25W	323		
			2225	4822 122 31765	100pF 5% 50V	3135	4822 051 10272	2k7 2% 0,25W	323		
			2227	4822 124 40435	10µF 20% 50V	3136	4822 116 81193	15Ω 5% 0,3W	325		
			2228	4822 122 31808	150pF 10% 50V	3137	4822 051 10223	22k 2% 0,25W			
			2229	4822 122 33496	100nF 10% 63V						

High end-box (continued)

					
5% 63V	3138	4822 051 10124	120k 2% 0,25W	7100	4822 130 61207 BC848
5% 63V	3139	4822 051 10101	100Ω 2% 0,25W	7102	4822 130 61207 BC848
0% 63V	3140	4822 051 10224	220k 2% 0,25W	7103	5322 130 42012 BC858
0% 63V	3141	4822 051 10223	22k 2% 0,25W	7104	4822 130 61207 BC848
0% 63V	3142	4822 051 10104	100k 2% 0,25W	7105	5322 130 42012 BC858
10% 63V	3143	4822 051 10104	100k 2% 0,25W	7106	4822 130 61207 BC848
10% 10V	3144	4822 051 10272	2k7 2% 0,25W	7107	4822 130 61207 BC848
0% 63V	3145	4822 051 10759	75Ω 2% 0,25W	7108	4822 130 40938 BC548
5% 63V	3146	4822 051 20222	2k2 5% 0,1W	7109	5322 130 42012 BC858A
5% 63V	3147	4822 051 10479	47Ω 2% 0,25W	7110	5322 130 42012 BC858
0% 63V	3148	4822 051 10479	47Ω 2% 0,25W	7111	4822 130 61207 BC848
5% 63V	3151	4822 051 10271	270Ω 2% 0,25W	7112	5322 130 42012 BC858
5% 63V	3152	4822 051 10621	620Ω 2% 0,25W	7113	5322 130 42012 BC858
6 50V	3153	4822 051 10122	1k2 2% 0,25W	7116	4822 130 42131 BF550
6 50V	3155	4822 051 10221	220Ω 2% 0,25W	7117	4822 130 42131 BF550
6 50V	3156	4822 051 10221	220Ω 2% 0,25W	7119	5322 130 42136 BC848C
0% 63V	3157	4822 051 10181	180Ω 2% 0,25W	7120	5322 130 42136 BC848C
0% 16V	3158	4822 051 10331	330Ω 2% 0,25W	7121	5322 130 42136 BC848C
0% 16V	3159	4822 051 20222	2k2 5% 0,1W	7122	5322 130 42136 BC848C
0% 63V	3160	4822 051 10241	240Ω 2% 0,25W	7123	5322 130 42012 BC858
0% 63V	3161	4822 051 10101	100Ω 2% 0,25W	7124	5322 130 42136 BC848C
0V	3162	4822 051 10221	220Ω 2% 0,25W	7125	5322 130 42136 BC848C
0% 63V	3163	4822 051 10471	470Ω 2% 0,25W	7156	4822 130 61207 BC848
0% 63V	3164	4822 051 20222	2k2 5% 0,1W	7157	4822 130 61207 BC848
0% 63V	3165	4822 051 10471	470Ω 2% 0,25W	7159	4822 130 61207 BC848
0% 63V	3166	4822 051 20222	2k2 5% 0,1W	7160	5322 130 42012 BC858
0% 6,3V	3168	4822 051 10101	100Ω 2% 0,25W	7200	4822 209 63645 SAA5231/V7
5% 50V	3169	4822 051 10474	470k 2% 0,25W	7201	4822 209 63902 SAA9042P/A/MO A
0% 63V	3170	4822 116 83319	287Ω 1% 0,125W	7202	4822 209 63893 LH2464-10
0% 63V	3171	4822 051 10681	680Ω 2% 0,25W	7203	4822 209 63297 TDA2579B/N1
5% 16V	3172	4822 051 10391	390Ω 2% 0,25W	7204	4822 209 63903 PCF80C51BH-3P/J265
0,25W	3173	4822 051 10102	1k 2% 0,25W	7205	4822 209 63892 UPD91237C/CEO 28A
0,25W	3174	4822 051 10102	1k 2% 0,25W	7206	4822 209 82341 PC74HCT04P
0,1W	3175	4822 051 10683	68k 2% 0,25W	7207	4822 209 82341 PC74HCT04P
0,1W	3176	4822 051 10103	10k 2% 0,25W	7209	4822 209 83163 LM833N
0,25W	3178	4822 051 10122	1k2 2% 0,25W	7210	4822 209 63894 PC74HCT4066P
0,25W	3198	4822 051 10008	0Ω 5% 0,25W	7211	4822 209 60199 MN6550B
0,25W	3200	4822 052 10189	18Ω 5% 0,33W	7212	4822 209 60199 MN6550B
0,25W	3202	4822 051 10101	100Ω 2% 0,25W	7213	4822 209 60199 MN6550B
0,25W	3203	4822 051 10101	100Ω 2% 0,25W	7214	5322 209 11588 PC74HCT195P
0,25W	3204	4822 051 10103	10k 2% 0,25W	7215	5322 209 11588 PC74HCT195P
0,25W	3205	4822 051 10102	1k 2% 0,25W	7216	5322 209 11588 PC74HCT195P
0,25W	3206	4822 051 10332	3k3 2% 0,25W	7217	5322 209 11588 PC74HCT195P
0,25W	3207	4822 051 10104	100k 2% 0,25W	7218	4822 209 72042 MC78L05ACP
0,25W	3208	4822 051 10102	1k 2% 0,25W	7250	4822 209 60525 TMS4C1050-3N
0,25W	3209	4822 051 10562	5k6 2% 0,25W	7251	4822 209 60525 TMS4C1050-3N
0,25W	3210	4822 111 41424	22Ω 5% 0,3W	7252	4822 209 60525 TMS4C1050-3N
0,25W	3211	4822 051 10229	22Ω 2% 0,25W	7253	4822 209 63891 SDA9060
0,25W	3212	4822 051 10122	1k2 2% 0,25W	7254	4822 209 63897 TDA4563/V5
0,25W	3213	4822 051 10561	560Ω 2% 0,25W	7255	4822 209 72042 MC78L05ACP
0,25W	3214	4822 051 10303	30k 2% 0,25W		
0,25W	3215	4822 051 10102	1k 2% 0,25W		
0,25W	3216	4822 051 10562	5k6 2% 0,25W		
0,25W	3217	4822 051 10101	100Ω 2% 0,25W		
0,25W	3218	4822 051 10155	1M 5 5% 0,25W		
0,25W	3220	4822 051 10473	47k 2% 0,25W		
0,25W	3221	4822 051 10181	180Ω 2% 0,25W		
0,25W	3222	4822 051 10683	68k 2% 0,25W		
0,25W	3223	4822 051 10102	1k 2% 0,25W		
0,25W	3224	4822 051 20222	2k2 5% 0,1W		
0,25W	3225	4822 051 10221	220Ω 2% 0,25W		
0,25W	3226	4822 051 10681	680Ω 2% 0,25W		
0,25W	3227	4822 051 10221	220Ω 2% 0,25W		
0,25W	3228	4822 100 20166	10k 30% LIN		
0,25W	3230	4822 051 10562	5k6 2% 0,25W		
0,25W	3231	4822 051 20222	2k2 5% 0,1W		
0,25W	3232	4822 051 10102	1k 2% 0,25W		
0,25W	3251	4822 051 10393	39k 2% 0,25W		

Second tuner PIP

Secon

										
4822 265 40503	5P female gold plated		2391	4822 122 32927	220nF		3242	4822 050 11002	1k 1% 0,4W	
4822 265 40472	10P female gold plated		2395	4822 122 32927	220nF		3250	4822 051 10911	910Ω 2% 0,25W	
4822 265 20509	2P grey		2397	4822 122 32927	220nF		3265	4822 051 10104	100k 2% 0,25W	
4822 265 20511	2P blue		2404	4822 122 31965	220pF 5% 63V		3270	4822 051 10103	10k 2% 0,25W	
4822 265 30828	5P male		2405	4822 122 32862	10nF 80% 50V		3275	4822 051 10103	10k 2% 0,25W	
4822 265 30899	5P		2409	4822 122 31965	220pF 5% 63V		3276	4822 051 10102	1k 2% 0,25W	
Various parts			2410	4822 122 32862	10nF 80% 50V		3330	4822 051 10473	47k 2% 0,25W	
1155	4822 320 40051	delay line DL711	2413	4822 122 31765	100pF 5% 50V		3332	4822 051 10152	1k5 2% 0,25W	
1201	4822 242 70304	crystal 8,867 238 MHz	2414	4822 122 32862	10nF 80% 50V		3335	4822 051 10271	270Ω 2% 0,25W	
1212	4822 242 70736	crystal 7,159 090 MHz	2415	4822 122 31965	220pF 5% 63V		3336	4822 051 10682	6k8 2% 0,25W	
1500	4822 212 23792	PLL PANEL	2430	4822 122 31947	100nF 20% 63V		3337	4822 050 11002	1k 1% 0,4W	
1600	4822 210 50124	UV916E/IEC	2432	4822 122 31947	100nF 20% 63V		3338	4822 051 10332	3k3 2% 0,25W	
1610	4822 242 80275	OFWG3962	2434	4822 122 31947	100nF 20% 63V		3340	4822 116 52253	2k 5% 0,5W	
			2438	4822 121 42472	10nF 10% 50V		3341	4822 052 10129	12Ω 5% 0,33W	
			2439	4822 121 41856	22nF 5% 250V		3345	4822 111 41424	22Ω 5% 0,3W	
			2440	4822 122 31965	220pF 5% 63V		3353	4822 052 10568	5Ω6 5% 0,33W	
			2441	4822 122 31727	470pF 5% 63V		3354	4822 051 10331	330Ω 2% 0,25W	
			2442	4822 124 40242	1μF 20% 63V		3376	4822 051 10008	0Ω 5% 0,25W	
			2445	5322 122 31842	330pF 5% 63V		3377	4822 051 10008	0Ω 5% 0,25W	
			2447	4822 124 41643	100μF 20% 16V		3378	4822 051 10008	0Ω 5% 0,25W	
			2448	4822 122 31947	100nF 20% 63V		3404	4822 051 10431	430Ω 2% 0,25W	
			2604	4822 124 40195	150μF 20% 16V		3405	4822 051 10271	270Ω 2% 0,25W	
			2614	4822 124 41506	47μF 20% 16V		3406	4822 051 10162	1k6 2% 0,25W	
			2615	4822 124 41576	2,2μF 20% 50V		3407	4822 051 10332	3k3 2% 0,25W	
			2616	4822 122 32927	220nF		3410	4822 051 10391	390Ω 2% 0,25W	
			2618	4822 122 32442	10nF 50V		3411	4822 051 10361	360Ω 2% 0,25W	
			2619	4822 124 40849	330μF 20% 16V		3412	4822 051 10751	750Ω 2% 0,25W	
			2620	4822 122 32442	10nF 50V		3414	4822 051 10181	180Ω 2% 0,25W	
			2621	4822 122 31797	22nF 10% 63V		3416	4822 051 10182	1k8 2% 0,25W	
			2622	4822 122 31947	100nF 20% 63V		3434	4822 051 10473	47k 2% 0,25W	
			2623	4822 122 31797	22nF 10% 63V		3436	4822 051 10473	47k 2% 0,25W	
			2627	4822 122 32927	220nF		3437	4822 051 10101	100Ω 2% 0,25W	
			3103	4822 051 10821	820Ω 2% 0,25W		3438	4822 051 10513	51k 2% 0,25W	
			3104	4822 051 10821	820Ω 2% 0,25W		3440	4822 116 52222	390Ω 5% 0,5W	
			3105	4822 051 10362	3k6 2% 0,25W		3441	4822 051 10519	51Ω 2% 0,25W	
			3106	4822 116 52233	10k 5% 0,5W		3442	4822 051 10919	91Ω 2% 0,25W	
			3107	4822 051 10103	10k 2% 0,25W		3444	4822 116 52175	100Ω 5% 0,5W	
			3108	4822 051 10103	10k 2% 0,25W		3446	4822 116 52175	100Ω 5% 0,5W	
			3155	4822 051 10391	390Ω 2% 0,25W		3448	4822 051 10392	3k9 2% 0,25W	
			3156	4822 051 10122	1k2 2% 0,25W		3450	4822 051 10431	430Ω 2% 0,25W	
			3157	4822 100 11391	330Ω 30% LIN		3452	4822 051 10431	430Ω 2% 0,25W	
			3158	4822 051 10759	75Ω 2% 0,25W		3454	4822 051 10431	430Ω 2% 0,25W	
			3170	4822 051 10112	1k1 2% 0,25W		3464	4822 051 10102	1k 2% 0,25W	
			3175	4822 051 10621	620Ω 2% 0,25W		3471	4822 051 10752	7k 5 2% 0,25W	
			3196	4822 050 11002	1k 1% 0,4W		3472	4822 051 10103	10k 2% 0,25W	
			3200	4822 051 10103	10k 2% 0,25W		3473	4822 051 10102	1k 2% 0,25W	
			3201	4822 051 10103	10k 2% 0,25W		3474	4822 116 52277	39k 5% 0,5W	
			3202	4822 051 10103	10k 2% 0,25W		3475	4822 051 10821	820Ω 2% 0,25W	
			3211	4822 051 10103	10k 2% 0,25W		3476	4822 051 10152	1k5 2% 0,25W	
			3212	4822 051 10103	10k 2% 0,25W		3600	4822 051 10103	10k 2% 0,25W	
			3214	4822 051 10102	1k 2% 0,25W		3601	4822 051 10103	10k 2% 0,25W	
			3220	4822 051 10512	5k1 2% 0,25W		3602	4822 051 10101	100Ω 2% 0,25W	
			3221	4822 116 52233	10k 5% 0,5W		3603	4822 051 10101	100Ω 2% 0,25W	
			3222	4822 051 10008	0Ω 5% 0,25W		3604	4822 052 10158	1Q5 5% 0,33W	
			3227	4822 116 52299	7k 5 5% 0,5W		3605	4822 051 10223	22k 2% 0,25W	
			3228	4822 051 10472	4k7 2% 0,25W		3610	4822 100 11319	4k7 30% LIN	
			3231	4822 051 10302	3k 2% 0,25W		3611	4822 051 10332	3k3 2% 0,25W	
			3232	4822 051 10229	22Ω 2% 0,25W		3612	4822 051 10272	2k7 2% 0,25W	
			3233	4822 051 10152	1k5 2% 0,25W		3613	4822 051 10103	10k 2% 0,25W	
			3234	4822 051 10202	2k 2% 0,25W		3614	4822 051 10123	12k 2% 0,25W	
			3235	4822 051 10202	2k 2% 0,25W		3615	4822 051 10822	8k2 2% 0,25W	
			3236	4822 051 10511	510Ω 2% 0,25W		3616	4822 050 11002	1k 1% 0,4W	
			3237	4822 051 10153	15k 2% 0,25W		3617	4822 051 10102	1k 2% 0,25W	
			3238	4822 051 10333	33k 2% 0,25W		3618	4822 052 10568	5Ω6 5% 0,33W	
			3239	4822 100 11319	4k7 30% LIN		3619	4822 051 10471	470Ω 2% 0,25W	
			3241	4822 051 10302	3k 2% 0,25W		3620	4822 051 20222	2k2 5% 0,1W	
							3621	4822 051 10105	1M 5% 0,25W	
							3622	4822 051 10272	2k7 2% 0,25W	

Jumper

4003

4007

4009

4011

4012

4013

4014

4015

4016

4017

4018

4019

4020

4021

4022

4024

4025

4026

4028

4029

4046

4047

4048

4049

4402

4415

4417

4418

4419

4420

4421

4631

4632

4634

5118

5155

5157

5170

5175

5190

5400

5402

5403

5406

5408

5410

6301

6464

6471

Second tuner PIP (continued)



3624	4822 051 10272	2k7 2% 0,25W
3625	4822 051 10511	510Ω 2% 0,25W
3630	4822 051 10101	100Ω 2% 0,25W
3631	4822 051 10101	100Ω 2% 0,25W
3632	4822 051 10102	1k 2% 0,25W
3633	4822 051 10753	75k 2% 0,25W
3634	4822 051 10753	75k 2% 0,25W
3635	4822 051 10562	5k6 2% 0,25W
3636	4822 051 10911	910Ω 2% 0,25W
3637	4822 051 20183	18k 5% 0,1W
3638	4822 051 10362	3k6 2% 0,25W
3997	4822 051 10479	47Ω 2% 0,25W

Jumper

4003	5322 122 31647	1nF 10% 63V
4007	4822 051 10008	0Ω 5% 0,25W
4009	4822 051 10008	0Ω 5% 0,25W
4011	4822 051 10008	0Ω 5% 0,25W
4012	4822 051 10008	0Ω 5% 0,25W
4013	4822 051 10008	0Ω 5% 0,25W
4014	4822 051 10008	0Ω 5% 0,25W
4015	4822 051 10008	0Ω 5% 0,25W
4016	4822 051 10008	0Ω 5% 0,25W
4017	4822 051 10008	0Ω 5% 0,25W
4018	4822 051 10008	0Ω 5% 0,25W
4019	4822 051 10008	0Ω 5% 0,25W
4020	4822 051 10008	0Ω 5% 0,25W
4021	4822 051 10008	0Ω 5% 0,25W
4022	4822 051 10008	0Ω 5% 0,25W
4024	4822 051 10008	0Ω 5% 0,25W
4025	4822 051 10008	0Ω 5% 0,25W
4026	4822 051 10008	0Ω 5% 0,25W
4028	4822 051 10008	0Ω 5% 0,25W
4029	4822 051 10008	0Ω 5% 0,25W
4046	4822 051 10008	0Ω 5% 0,25W
4047	4822 051 10008	0Ω 5% 0,25W
4048	4822 051 10008	0Ω 5% 0,25W
4049	4822 051 10008	0Ω 5% 0,25W
4402	4822 051 10008	0Ω 5% 0,25W
4415	4822 051 10008	0Ω 5% 0,25W
4417	4822 051 10008	0Ω 5% 0,25W
4418	4822 051 10008	0Ω 5% 0,25W
4419	4822 051 10008	0Ω 5% 0,25W
4420	4822 051 10008	0Ω 5% 0,25W
4421	4822 051 10008	0Ω 5% 0,25W
4631	4822 051 10008	0Ω 5% 0,25W
4632	4822 051 10008	0Ω 5% 0,25W
4634	4822 051 10008	0Ω 5% 0,25W



5118	4822 157 60435	10,3μH 6%
5155	4822 157 60433	7,2μH 6%
5157	4822 157 60434	9,4μH 6%
5170	4822 157 60432	10,3μH
5175	4822 157 60432	10,3μH
5190	4822 157 60432	10,3μH
5400	4822 157 50943	12μH 10%
5402	4822 157 50943	12μH 10%
5403	4822 157 52333	100μH
5406	4822 157 50943	12μH 10%
5408	4822 157 50943	12μH 10%
5410	4822 116 52184	18Ω 5% 0,5W



6301	4822 130 80446	LL4148
6464	4822 130 80235	BZX79-C3V3
6471	4822 130 81227	BZV55-F5V6



7103	5322 130 41982	BC848B
7105	5322 130 41982	BC848B
7125	4822 209 63927	TDA4554/V1
7200	5322 130 41982	BC848B
7210	5322 130 41982	BC848B
7233	5322 130 41982	BC848B
7234	5322 130 41982	BC848B
7235	5322 130 41982	BC848B
7330	5322 130 41982	BC848B
7335	5322 130 41982	BC848B
7337	5322 130 41982	BC848B
7338	5322 130 41982	BC848B
7350	4822 130 42616	BC818-40
7400	5322 130 41983	BC858B
7402	5322 130 41983	BC858B
7404	5322 130 41983	BC858B
7406	4822 209 62473	SDA9087
7470	4822 130 62844	BD826-16
7471	4822 130 62846	ON4590
7472	4822 130 62846	ON4590
7473	5322 130 41982	BC848B
7610	4822 209 30393	TDA8349A/N2
7630	4822 209 30395	SAA1300AQ/N6
7755	4822 209 63423	TDA2579A/N8/S2

NICAM sound module **K**

4822 265 41087 9P male 4822 265 41087 9P male					
Various parts					
1106	4822 242 72301	filter TH316BOM-20800DAF			
1106	4822 242 72303	filter TH316BQM			
1120	4822 242 80272	crystal 5,850 MHz			
1120	4822 242 80274	crystal 6,552 MHz			
1140	4822 242 80273	crystal 5,824 MHz			
2100	5322 122 31647	1nF 10% 63V	2182	4822 126 11493	474nF 20% 50V
2101	4822 122 31981	33nF + -0,5pF 50V	2185	4822 124 40433	47μF 20% 25V
2102	4822 122 31797	22nF 10% 63V	2186	4822 122 31797	22nF 10% 63V
2106	5322 122 31647	1nF 10% 63V	2187	4822 122 31759	18nF 10% 50V
2107	4822 122 32442	10nF 10% 50V	2187	4822 122 32442	10nF 10% 50V
2110	4822 122 32442	10nF 10% 50V	2188	4822 122 33608	39nF 10% 63V
2111	4822 124 22606	68μF 20% 16V	2188	4822 122 31797	22nF 10% 63V
2112	4822 126 11493	474nF 20% 50V	2189	4822 126 10171	2,7nF 5% 50V
2113	4822 126 11493	474nF 20% 50V	2190	4822 122 32999	2,2nF 5% 50V
2115	4822 122 31774	56pF 5% 50V	2191	4822 122 31773	560pF 5% 50V
2117	4822 125 50045	20pF trim.	2192	4822 126 11493	474nF 20% 50V
2118	4822 122 32504	15pF 5% 50V	2197	4822 124 40272	33μF 20% 16V
2120	4822 122 31769	18pF 5% 50V	2198	4822 124 40272	33μF 20% 16V
2120	4822 122 32444	33pF 5% 50V	2199	4822 122 32442	10nF 10% 50V
2121	4822 122 32442	10nF 10% 50V			
2122	4822 126 11493	474nF 20% 50V	3100	4822 051 10432	4k3 2% 0,25W
2124	4822 122 31965	220pF 5% 63V	3101	4822 051 10103	10k 2% 0,25W
2125	4822 122 31965	220pF 5% 63V	3102	4822 052 10129	12Ω 5% 0,33W
2126	4822 122 32442	10nF 10% 50V	3103	4822 051 10271	270Ω 2% 0,25W
2127	4822 122 32442	10nF 10% 50V	3104	4822 051 10111	110Ω 2% 0,25W
2128	4822 122 33496	100nF 10% 63V	3105	4822 051 10241	240Ω 2% 0,25W
2130	4822 122 33496	100nF 10% 63V	3106	4822 051 10471	470Ω 2% 0,25W
2132	4822 122 33496	100nF 10% 63V	3107	4822 051 10471	470Ω 2% 0,25W
2134	4822 122 33496	100nF 10% 63V	3110	4822 052 10278	207 5% 0,33W
2136	4822 122 32442	10nF 10% 50V	3112	4822 051 10154	150k 2% 0,25W
2137	4822 126 11493	474nF 20% 50V	3113	4822 051 10224	220k 2% 0,25W
2138	4822 122 32442	10nF 10% 50V	3115	4822 051 10511	510Ω 2% 0,25W
2139	4822 122 31774	56pF 5% 50V	3120	4822 051 10102	1k 2% 0,25W
2140	4822 122 31961	68pF 5% 63V	3122	4822 051 10393	39k 2% 0,25W
2141	4822 122 32444	33pF 5% 50V	3137	4822 051 10393	39k 2% 0,25W
2142	4822 122 32504	15pF 5% 50V	3139	4822 051 10471	470Ω 2% 0,25W
2143	4822 122 32504	15pF 5% 50V	3140	4822 051 10102	1k 2% 0,25W
2144	4822 122 32504	15pF 5% 50V	3142	4822 051 10331	330Ω 2% 0,25W
2145	4822 122 33496	100nF 10% 63V	3145	4822 052 10228	202 5% 0,33W
2150	4822 122 33496	100nF 10% 63V	3146	4822 051 10101	100Ω 2% 0,25W
2152	4822 122 33496	100nF 10% 63V	3147	4822 051 10101	100Ω 2% 0,25W
2154	4822 122 31772	47pF 5% 50V	3150	4822 052 10278	207 5% 0,33W
2155	4822 125 50045	20pF trim.	3152	4822 051 10102	1k 2% 0,25W
2156	4822 122 32442	10nF 10% 50V	3153	4822 051 10103	10k 2% 0,25W
2158	4822 122 31972	39pF 5% 50V	3160	4822 051 10104	100k 2% 0,25W
2159	4822 122 31772	47pF 5% 50V	3161	4822 051 10104	100k 2% 0,25W
2165	4822 124 41506	47μF 20% 16V	3162	4822 051 10473	47k 2% 0,25W
2166	4822 122 31797	22nF 10% 63V	3165	4822 052 10278	207 5% 0,33W
2170	4822 122 33496	100nF 10% 63V	3166	4822 116 52276	3k9 5% 0,5W
2171	4822 124 41643	100μF 20% 16V	3169	4822 051 10473	47k 2% 0,25W
2175	4822 124 40433	47μF 20% 25V	3170	4822 052 10278	207 5% 0,33W
2176	4822 122 31797	22nF 10% 63V	3175	4822 052 10109	10Ω 5% 0,33W
2177	4822 122 31759	18nF 10% 50V	3177	4822 051 10562	5k6 2% 0,25W
2177	4822 122 32442	10nF 10% 50V	3177	4822 051 10103	10k 2% 0,25W
2178	4822 122 33608	39nF 10% 63V	3178	4822 051 10102	1k 2% 0,25W
2178	4822 122 31797	22nF 10% 63V	3178	4822 051 10182	1k8 2% 0,25W
2179	4822 126 10171	2,7nF 5% 50V	3179	4822 051 10472	4k7 2% 0,25W
2180	4822 122 32999	2,2nF 5% 50V	3180	4822 051 10472	4k7 2% 0,25W
2181	4822 122 31773	560pF 5% 50V	3182	4822 051 10183	18k 2% 0,25W
			3184	4822 051 10912	9k1 2% 0,25W
			3184	4822 051 10682	6k8 2% 0,25W
			3185	4822 052 10109	10Ω 5% 0,33W
			3186	4822 051 10008	0Ω 5% 0,25W
			3187	4822 051 10562	5k6 2% 0,25W
			3187	4822 051 10103	10k 2% 0,25W
			3188	4822 051 10102	1k 2% 0,25W
			3188	4822 051 10182	1k8 2% 0,25W
			3189	4822 051 10472	4k7 2% 0,25W
			3190	4822 051 10472	4k7 2% 0,25W
			3192	4822 051 10183	18k 2% 0,25W
			3196	4822 051 10008	0Ω 5% 0,25W
			3197	4822 051 10331	330Ω 2% 0,25W

Jumpers

4101	4822 051 10008	0Ω 5% 0,25W
4102	4822 051 10008	0Ω 5% 0,25W
4103	4822 051 10008	0Ω 5% 0,25W
4104	4822 051 10008	0Ω 5% 0,25W
4105	4822 051 10008	0Ω 5% 0,25W
4106	4822 051 10008	0Ω 5% 0,25W
4107	4822 051 10008	0Ω 5% 0,25W
4108	4822 051 10008	0Ω 5% 0,25W
4109	4822 051 10008	0Ω 5% 0,25W
4110	4822 051 10008	0Ω 5% 0,25W
4111	4822 051 10008	0Ω 5% 0,25W

5124	4822 157 51238	820μH 10%
5125	4822 157 51238	820μH 10%
5155	4822 157 53575	3,3μH 10%
5180	4822 157 51462	10μH 10%

6154	4822 130 82352	BB215
6197	4822 130 81027	LLZ-C11

7100	5322 130 42136	BC848C
7101	4822 130 60514	BC859B
7110	4822 209 73558	TA8662N
7145	5322 209 10883	PCF8574P
7150	4822 209 61114	CF70123
7160	4822 130 61207	BC848
7165	4822 209 72545	SAA7220P/B
7170	4822 209 63899	TDA1543/N2/S6
7175	4822 209 83163	LM833N
7185	4822 209 83163	LM833N
7195	5322 209 10576	4053B
7198	4822 130 61207	BC848

Picture tube panel **E**

4822 255 70264 pictuer tube socket
 4822 265 20509 2P male grey
 4822 265 40596 2P male Vg2
 4822 267 40985 6P male
 4822 265 41107 7P male
 4822 492 70788 spring fix IC
 4822 492 70788 spring fix IC
 4822 492 70788 spring fix IC
 4822 404 31199 bracket



2700 4822 126 11824 100pF 10% 1KV
 2701 4822 122 31971 10pF 10% 50V
 2702 4822 122 31784 4,7nF 10% 50V
 2704 4822 122 31746 1000pF 5% 50V
 2705 4822 124 40272 33μF 20% 16V
 2706 4822 122 31797 22nF 10% 63V
 2707 4822 121 51562 33nF 10% 1600V
 2708 5322 122 31842 330pF 5% 63V
 2709 4822 124 23494 10μF 20% 250V
 2710 4822 122 31797 22nF 10% 63V
 2711 4822 122 31971 10pF 10% 50V
 2712 4822 122 31784 4,7nF 10% 50V
 2713 4822 121 42068 33nF 10% 400V
 2714 4822 122 31746 1000pF 5% 50V
 2715 4822 121 42068 33nF 10% 400V
 2720 4822 122 31825 27pF 10% 50V
 2721 4822 122 31971 10pF 10% 50V
 2722 4822 122 31784 4,7nF 10% 50V
 2724 4822 122 31746 1000pF 5% 50V
 2725 4822 122 31774 56pF 5% 50V
 2726 4822 122 31774 56pF 5% 50V
 2727 4822 122 31774 56pF 5% 50V



3700 4822 051 20222 2k2 5% 0,1W
 3701 4822 052 11108 1Ω 5% 0,5W
 3702 4822 051 10201 200Ω 2% 0,25W
 3703 4822 052 11108 1Ω 5% 0,5W
 3704 4822 051 10222 2k2 2% 0,25W
 3705 4822 051 10242 2k4 2% 0,25W
 3707 4822 051 10008 0Ω 5% 0,25W
 3708 4822 116 81434 1k 10%
 3709 4822 051 10124 120k 2% 0,25W
 3710 4822 051 10333 33k 2% 0,25W
 3712 4822 051 10201 200Ω 2% 0,25W
 3714 4822 051 20222 2k2 5% 0,1W
 3715 4822 051 10242 2k4 2% 0,25W
 3716 4822 050 21204 120k 1% 0,6W
 3718 4822 116 81434 1k 10%
 3719 4822 051 10333 33k 2% 0,25W
 3720 4822 051 10823 82k 2% 0,25W
 3722 4822 051 10201 200Ω 2% 0,25W
 3723 4822 051 10102 1k 2% 0,25W
 3724 4822 051 20222 2k2 5% 0,1W
 3725 4822 051 10242 2k4 2% 0,25W
 3726 4822 050 21204 120k 1% 0,6W
 3727 4822 111 50518 1k 5 5% 0,5W
 3728 4822 116 81434 1k 10%
 3730 4822 111 50518 1k 5 5% 0,5W
 3731 4822 052 10279 27Ω 5% 0,33W
 3732 4822 052 10189 18Ω 5% 0,33W
 3734 4822 050 21604 160k 1% 0,6W
 3735 4822 051 10103 10k 2% 0,25W
 3736 4822 051 10333 33k 2% 0,25W
 3737 4822 051 10153 15k 2% 0,25W
 3738 4822 053 12823 82k 5% 3W

3739 4822 101 10963 47k 10% LIN
 3740 4822 050 21604 160k 1% 0,6W

Jumpers

4701 4822 051 10008 0Ω 5% 0,25W
 4702 4822 051 10008 0Ω 5% 0,25W
 4703 4822 051 10008 0Ω 5% 0,25W



5700 4822 157 63249 262LYF-0086K



6700 4822 130 80879 LLZ-C3V0
 6701 4822 130 80877 BAV103
 6702 4822 130 80877 BAV103
 6703 4822 130 80877 BAV103
 6707 4822 130 82345 LLZ-C22
 6708 4822 130 32896 BYD33M
 6709 4822 130 34379 BZX79-C27



7704 4822 130 60373 BC856B
 7705 4822 209 30417 TDA6111Q/N2
 7706 4822 209 30417 TDA6111Q/N2
 7707 4822 209 30417 TDA6111Q/N2

Scavem filter panel **Y**Scavem amplifier panel **Z**

4822 265 30351 5P male 4822 264 40207 3P male 4822 265 20464 2P 4822 264 40207 3P male	4822 265 30497 5P male 4822 265 40503 5P male gold plated	5812 4822 157 63507 0,18μH 5813 4822 157 63507 0,18μH 5814 4822 157 63507 0,18μH 5815 4822 157 63507 0,18μH
 2804 4822 124 22427 47μF 20% 35V 2805 4822 122 33496 100nF 10% 63V 2806 4822 124 22427 47μF 20% 35V 2807 4822 122 33496 100nF 10% 63V 2820 4822 122 33496 100nF 10% 63V 2822 4822 122 33496 100nF 10% 63V 2824 4822 122 33496 100nF 10% 63V 2825 4822 124 42269 100μF 20% 100V 2826 4822 122 31727 470pF 5% 63V 2827 4822 122 31727 470pF 5% 63V 2832 4822 122 33496 100nF 10% 63V 2833 4822 122 33496 100nF 10% 63V 2834 4822 122 33496 100nF 10% 63V 2835 4822 122 33496 100nF 10% 63V 2836 4822 122 33496 100nF 10% 63V 2837 4822 122 33496 100nF 10% 63V	 2800 4822 122 31774 56pF 5% 50V 2801 4822 124 40435 10μF 20% 50V 2802 4822 124 41525 100μF 20% 25V 2803 4822 122 32442 10nF 50V 2808 4822 122 33496 100nF 10% 63V 2809 4822 122 32442 10nF 50V 2810 4822 122 32442 10nF 50V 2811 4822 122 31808 150pF 10% 50V 2812 4822 122 33496 100nF 10% 63V 2813 4822 122 33496 100nF 10% 63V 2814 4822 122 32442 10nF 50V 2815 4822 122 32442 10nF 50V 2816 4822 122 31808 150pF 10% 50V 2817 4822 122 32083 8,2pF 5% 50V 2818 4822 122 32083 8,2pF 5% 50V 2819 4822 122 32442 10nF 50V 2840 4822 122 33496 100nF 10% 63V 2847 4822 124 42269 100μF 20% 100V 2872 4822 122 31768 180pF 5% 50V	 6802 4822 130 80446 LL4148 6803 5322 130 34337 BAV99 6804 5322 130 34337 BAV99 6805 5322 130 34337 BAV99 6810 4822 130 80884 LLZ-C5V1 6816 4822 130 80884 LLZ-C5V1
 3809 4822 052 10478 40Ω 5% 0,33W 3810 4822 052 10478 40Ω 5% 0,33W 3830 4822 053 10331 330Ω 5% 1W 3831 4822 053 10331 330Ω 5% 1W 3833 4822 051 10152 1k5 2% 0,25W 3834 4822 051 10132 1k3 2% 0,25W 3835 4822 051 10339 33Ω 2% 0,25W 3836 4822 051 10479 47Ω 2% 0,25W 3837 4822 116 52215 220Ω 5% 0,5W 3838 4822 053 10331 330Ω 5% 1W 3839 4822 053 10331 330Ω 5% 1W 3841 4822 051 10152 1k5 2% 0,25W 3842 4822 051 10132 1k3 2% 0,25W 3843 4822 051 10339 33Ω 2% 0,25W 3844 4822 051 10479 47Ω 2% 0,25W 3845 4822 051 10479 47Ω 2% 0,25W 3846 4822 051 10569 56Ω 2% 0,25W 3847 4822 051 10479 47Ω 2% 0,25W 3848 4822 051 10103 10k 2% 0,25W 3850 4822 051 10431 430Ω 2% 0,25W 3851 4822 051 10569 56Ω 2% 0,25W	 3800 4822 051 10821 820Ω 2% 0,25W 3801 4822 116 52214 200Ω 5% 0,5W 3807 4822 052 10478 40Ω 5% 0,33W 3812 4822 051 10101 100Ω 2% 0,25W 3813 4822 051 10103 10k 2% 0,25W 3814 4822 051 10103 10k 2% 0,25W 3815 4822 051 10123 12k 2% 0,25W 3816 4822 051 10391 390Ω 2% 0,25W 3817 4822 051 10561 560Ω 2% 0,25W 3818 4822 051 10271 270Ω 2% 0,25W 3819 4822 051 10271 270Ω 2% 0,25W 3821 4822 051 10101 100Ω 2% 0,25W 3822 4822 051 10182 1k8 2% 0,25W 3823 4822 051 10182 1k8 2% 0,25W 3824 4822 051 10339 33Ω 2% 0,25W 3825 4822 051 10102 1k 2% 0,25W 3826 4822 051 10102 1k 2% 0,25W 3827 4822 051 10471 470Ω 2% 0,25W 3828 4822 051 10829 82Ω 2% 0,25W 3829 4822 051 10682 6k8 2% 0,25W 3852 4822 051 10331 330Ω 2% 0,25W 3853 4822 051 10202 2k 2% 0,25W 3854 4822 051 10331 330Ω 2% 0,25W 3855 4822 051 10202 2k 2% 0,25W 3856 4822 051 10331 330Ω 2% 0,25W 3857 4822 051 10202 2k 2% 0,25W 3858 4822 051 10331 330Ω 2% 0,25W 3859 4822 051 10202 2k 2% 0,25W 3870 4822 051 10822 8k2 2% 0,25W 3871 4822 051 10822 8k2 2% 0,25W 3872 4822 122 31768 180pF 5% 50V	 7803 4822 130 61207 BC848 7804 4822 209 30404 NE592/N8 7805 4822 130 41594 PH2369 7806 4822 130 61207 BC848 7807 4822 130 61207 BC848 7809 5322 130 60646 BSR57 7818 4822 130 42705 BC847 7819 4822 130 61233 BC857 7820 4822 130 42705 BC847 7821 4822 130 61233 BC857 7825 5322 130 42012 BC858
 5830 4822 157 50965 15μH 10% 5831 4822 157 50965 15μH 10% 5832 4822 157 50965 15μH 10% 5833 4822 157 50965 15μH 10%	Jumpers 4802 4822 051 10008 0Ω 5% 0,25W 4812 4822 051 10008 0Ω 5% 0,25W	 5801 4822 157 50965 15μH 10% 5802 4822 157 50965 15μH 10% 5803 4822 157 50965 15μH 10%
 7808 4822 130 61207 BC848 7810 4822 130 41746 BD825 7811 4822 130 42589 BF370 7812 4822 130 41746 BD825 7813 4822 130 41774 BD826 7814 4822 130 41746 BD825 7815 4822 130 41774 BD826 7816 4822 130 41746 BD825 7817 4822 130 42589 BF370		