

SERVICIO PHILIPS


BE 341-A

20 + 25 m.
15 - 51 m.
185 - 580 m.


ZB 9768 - X - 5 Q

110 - 125 - 150 V.

185 - 580 m. A	185 - 580 m. B	185 - 580 m. C
452 Kc/s 32000 pFg-VI C6, C7 min. 548, 546, 540, 541, 542, 543, 546 máx.	548 Kc/s - Y C6, C7 () 548 Kc/s. 537, 524 máx. 1630 Kc/s - Y C6, C7 () 1630 Kc/s. C33, C23 máx. 20 + 25 m. 11,55 Mc/s - Y 528, 517 máx. 15 - 51 m. 20,2 Mc/s - Y C32 máx. 20 + 25 m. 15,6 Mc/s - Y C35, C19 máx.	452 Kc/s - Y C6, C7 min. 560 min

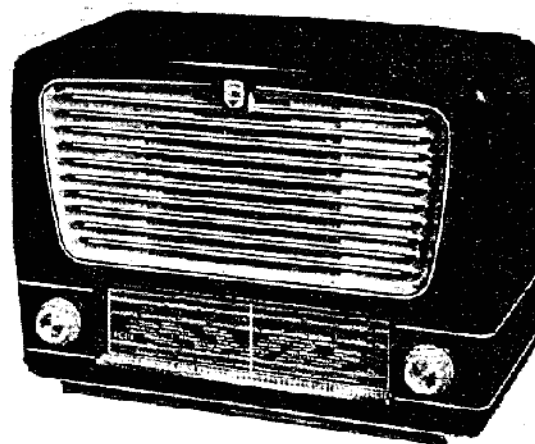

C1	25 pF	F 5003	R1	1800 Ohm	48 553 10/K8
C2	25 pF		R7	1 Mgh	48 555 10/1M
C6	11-498 pF	ZB 49 001 72	R8	47000 Ohm	48 555 10/47K
C7	11-498 pF		R9	33000 Ohm	48 557 10/33K
C19	30 pF	ZB 28 212 36	R10	39400 Ohm	48 558 10/39K
C23	30 pF	ZB 28 212 36	R11	1,5 Mgh	48 555 10/1M5
C24	124 pF	48 203 01/124E	R12	1500 Ohm	48 555 10/15K
C25	50 pF	48 203 02/50E	R13	47000 Ohm	48 555 10/47K
C26	124 pF	48 336 01/124E	R14	0,45 Mgh	48 904 30
C27	54 pF	48 336 01/54E	R15	0,05 Mgh	DL 50K-450K
C28	39 pF	48 203 10/39E	R16	10 Mgh	48 555 10/10M
C29	470 pF	48 203 20/470E	R18	0,18 Mgh	48 556 10/180K
C30	82 pF	48 203 02/82E	R19	39000 Ohm	48 555 10/39K
C31	430 pF	48 336 01/430E	R20	1000 Ohm	48 555 10/1K
C32	30 pF	ZB 28 212 36	R22	210 Ohm	48 557 05/210E
C33	30 pF	ZB 28 212 36	R23	100 Ohm	48 556 10/100E
C35	30 pF	ZB 28 212 36	R24	0,05 Mgh	48 900 60
C51	115 pF	1. bob. F. I.	R25	0,45 Mgh	3L 50K-450K
C52	115 pF				
C53	110 pF	2. bob. F. I.			
C54	110 pF				
C55	47000 pF	48 750 20/47K			
C57	1,1 pF	48 751 20/100K			
C58	33000 pF	48 750 10/33K			
C59	82 pF	48 203 10/82E			
C60	8200 pF	48 750 20/82K			
C61	10000 pF	48 751 20/10K			
C62	0,18 pF	48 751 20/180K			
C63	2200 pF	48 758 20/2K2			
C64	1500 pF	48 206 50/1K5			
C65	270 pF	48 203 05/270E			
C67	220 pF	48 203 20/220E			
C68	200 pF	48 742 10/200E			
S1, S2, S3.		F 2635			
S16, S17.		ZB A3 125 27			
S23, S24.		ZB A3 125 35			
S26, S27, S28		ZB A3 125 56			
S36, S37.		ZB A3 125 93			
S40.		ZB A3 125 84			
S40, S41, S42,					
S43, C51, C52		ZB A3 121 94			
S46, S48, C53, C54		ZB A3 124 25			
S50, S51, S52, S53.		F 2637			

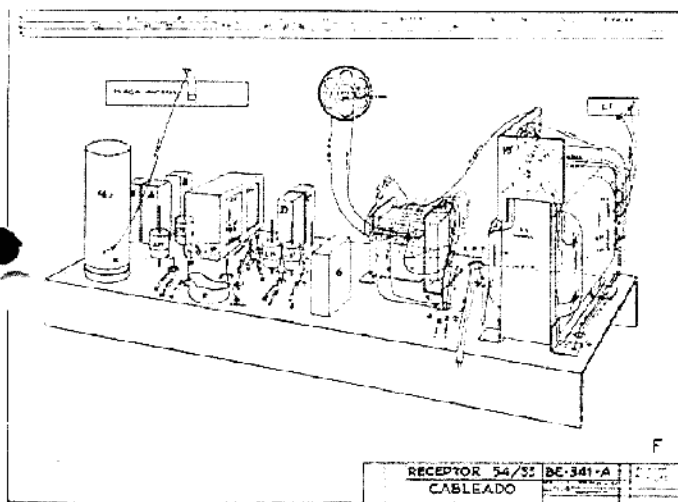

	V1	V2	V3	V4	
	ECH 81	6BF80	6BC41	EL84	
	Heptodo	Triodo			
Vf	6,3	6,3	6,3	6,3	Volts
Va	246	120	246	60	Volts
Vg2 + 4	60	60		239	Volts
- Vg	0,7	0,7	0,6	8,5	Volts
Ia	1,3	3,5	4	0,67	m.A.
Ig2 - 4	1,7	1,4	4		m.A.

