



20 + 25 m.
15 - 51 m.
59 - 187 m.
185 - 580 m.

F 9768 - X - 5 Ω

~ 110 - 125 - 150 V.

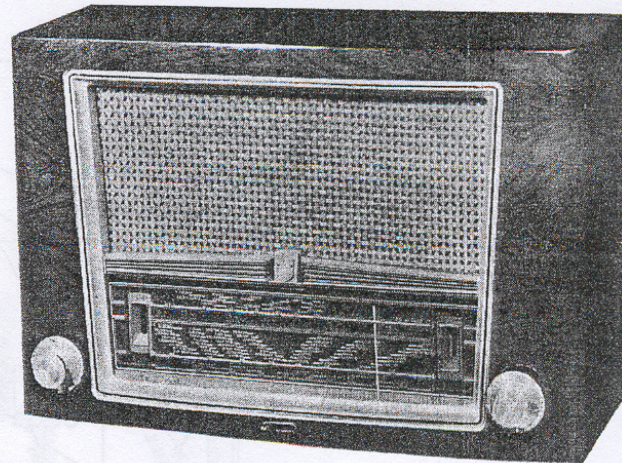

185 - 580 m.	A	185 - 580 m.	B	185 - 580 m.	C
452 Kc/s 32000 pFgI-VI		C6, C7 min.		452 Kc/s - Y	
C6, C7 min.		548 Kc/s - Y		C6, C7 min.	
S48, S46, S40, S41, S42, S43, S46 máx.		S37, S22 máx.		S60 min.	
		1630 Kc/s - Y			
		C33, C23 máx.			
		59 - 187 m.			
		1,72 Mc/s - Y			
		S12, S10 máx.			
		5,15 Mc/s - Y			
		20 + 25 m.			
		11,55 Mc/s - Y			
		S28, S17 máx.			
		15 - 51 m.			
		20,2 Mc/s - Y			
		C32 máx.			
		20 - 25 m.			
		15,6 Mc/s - Y			
		C35, C19 máx.			

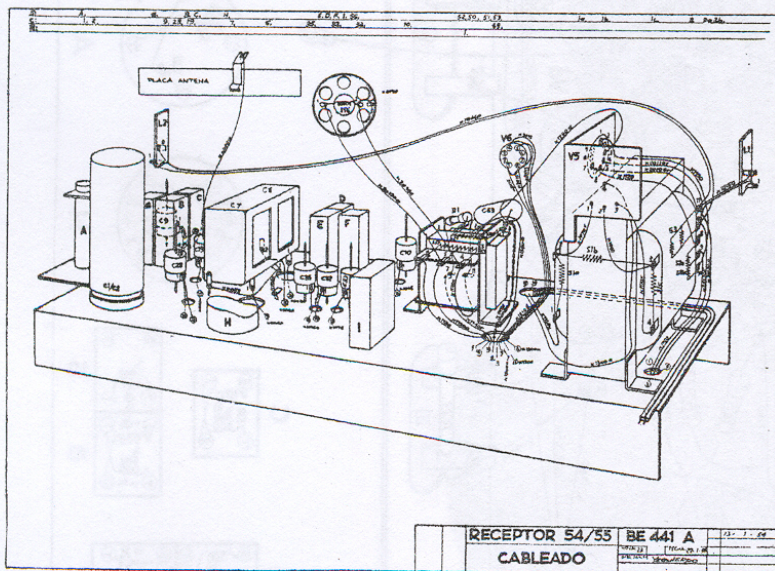

C1	50 pF	F 5001	R1	1200 Ohm	48 553 10/1K2
C2	50 pF		R5	33000 Ohm	48 555 10/33K
			R7	1 Mgh	48 555 10/1M
C6	11-498 pF	ZB 49 001 72	R8	47000 Ohm	48 555 10/47K
C7	11-498 pF		R9	33000 Ohm	48 557 10/33K
			R10	22000 Ohm	48 558 10/22K
C9	30 pF	ZB 28 21 236	R11	1,5 Mgh	48 555 10/1M5
C19	30 pF	ZB 28 21 236	R12	15000 Ohm	48 555 10/15K
C20	3000 pF	ZB 48 429 05/3K	R13	47000 Ohm	48 555 10/47K
C10	30 pF	ZB 28 212 36	R14	0,45 Mgh	ZB 48 900 00/
C22	1500 pF	48 206 50/1K5	R15	0,05 Mgh	DL 50K + 450K
C23	30 pF	ZB 28 212 36	R16	10 Mgh	48 555 10/10M
C24	126 pF	48 203 01/126E	R18	0,1 Mgh	48 556 10/100K
C25	50 pF	48 203 02/50E	R19	0 1 Mgh	48 555 10/100K
C26	126 pF	48 336 01/126E	R20	1000 Ohm	48 555 10/1K
C27	56 pF	48 336 02/56E	R21	5,6 Mgh	48 555 10/5M6
C28	39 pF	48 203 10/39E	R22	210 Ohm	48 557 05/210E
C29	470 pF	48 203 20/470E	R23	100 Ohm	48 556 10/100E
C30	82 pF	48 203 02/82E	R24	0,05 Mgh	ZB 48 904 30/
C31	360 pF	48 336 01/360E	R25	0,45 Mgh	GL 50K + 450K
C32	30 pF	ZB 28 212 36	R26	220 Ohm	48 556 10/220E
C33	30 pF	ZB 28 212 36	R27	0,82 Mgh	48 556 10/820K
C34	1575 pF	48 429 01/1K575	R28	47000 Ohm	48 555 10/47K
C35	30 pF	ZB 28 212 36	R29	1,5 Mgh	48 555 10/1M5
C51	115 pF	1.º boh. F. I.			
C52	115 pF	2.º boh. F. I.			
C53	110 pF				
C54	110 pF				
C55	47000 pF	48 750 10/47K			
C56	0,1 pF	48 751 20/100E			
C57	0,1 pF	48 751 20/100K			
C58	33000 pF	48 750 10/33K			
C59	82 pF	48 203 10/82E			
C60	10000 pF	48 750 20/10K			
C61	22000 pF	48 751 20/22K			
C62	10000 pF	48 751 20/10K			
C63	2200 pF	48 758 20/2K2			
C64	1500 pF	48 206 50/1K5			
C65	270 pF	48 203 05/270E			
C66	0,1 pF	48 751 20/100E			
C67	220 pF	48 203 20/220E			

	V1		V2	V3	V4	V6	
	ECH 81		EBF 80	EBC 41	EL 84	DM 71	
	Heptodo	Triodo					
Vf	6,3		6,3	6,3	6,3	1,4	Volts.
Va	244	129	244	73	241	60	Volts.
Vg2 + 4	78		78		235		Volts
- Vg	0,8		0,8	0,7	8,1	0,8	Volts
Ia	2,3	3,4	5,4	0,65	35	0,15	m.A.
Ig 2 + 4	2		2		4		m.A.

S1, S2, S3.	F 2633
S9, S10.	ZB A3 125 33
S16, S17.	ZB A3 125 27
S11, S12	ZB A3 125 68
S21, S22.	ZB A3 117 04
S60.	ZB A3 125 84
S26, S27, S28.	ZB A3 125 56
S36, S37.	ZB A3 125 93
S40, S41, S42, S43.	ZB A3 121 94
S46, S48.	ZB A3 124 25
S50, S51, S52, S53.	F 2637

