

S: 5, 6, 7, 8, 9, 10, 11, 12, 1, 2, 3, 4







13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23

24, 25


C: 6, 7, 8, 9, 10, 4, 13, 11, 12, 1, 2, 14, 15, 5, 17, 18, 19, 20, 21, 22, 23, 24, 25

R: 24, 2, 1, 3, 4, 5, 27, 26, 26, 6


26, 26, 6

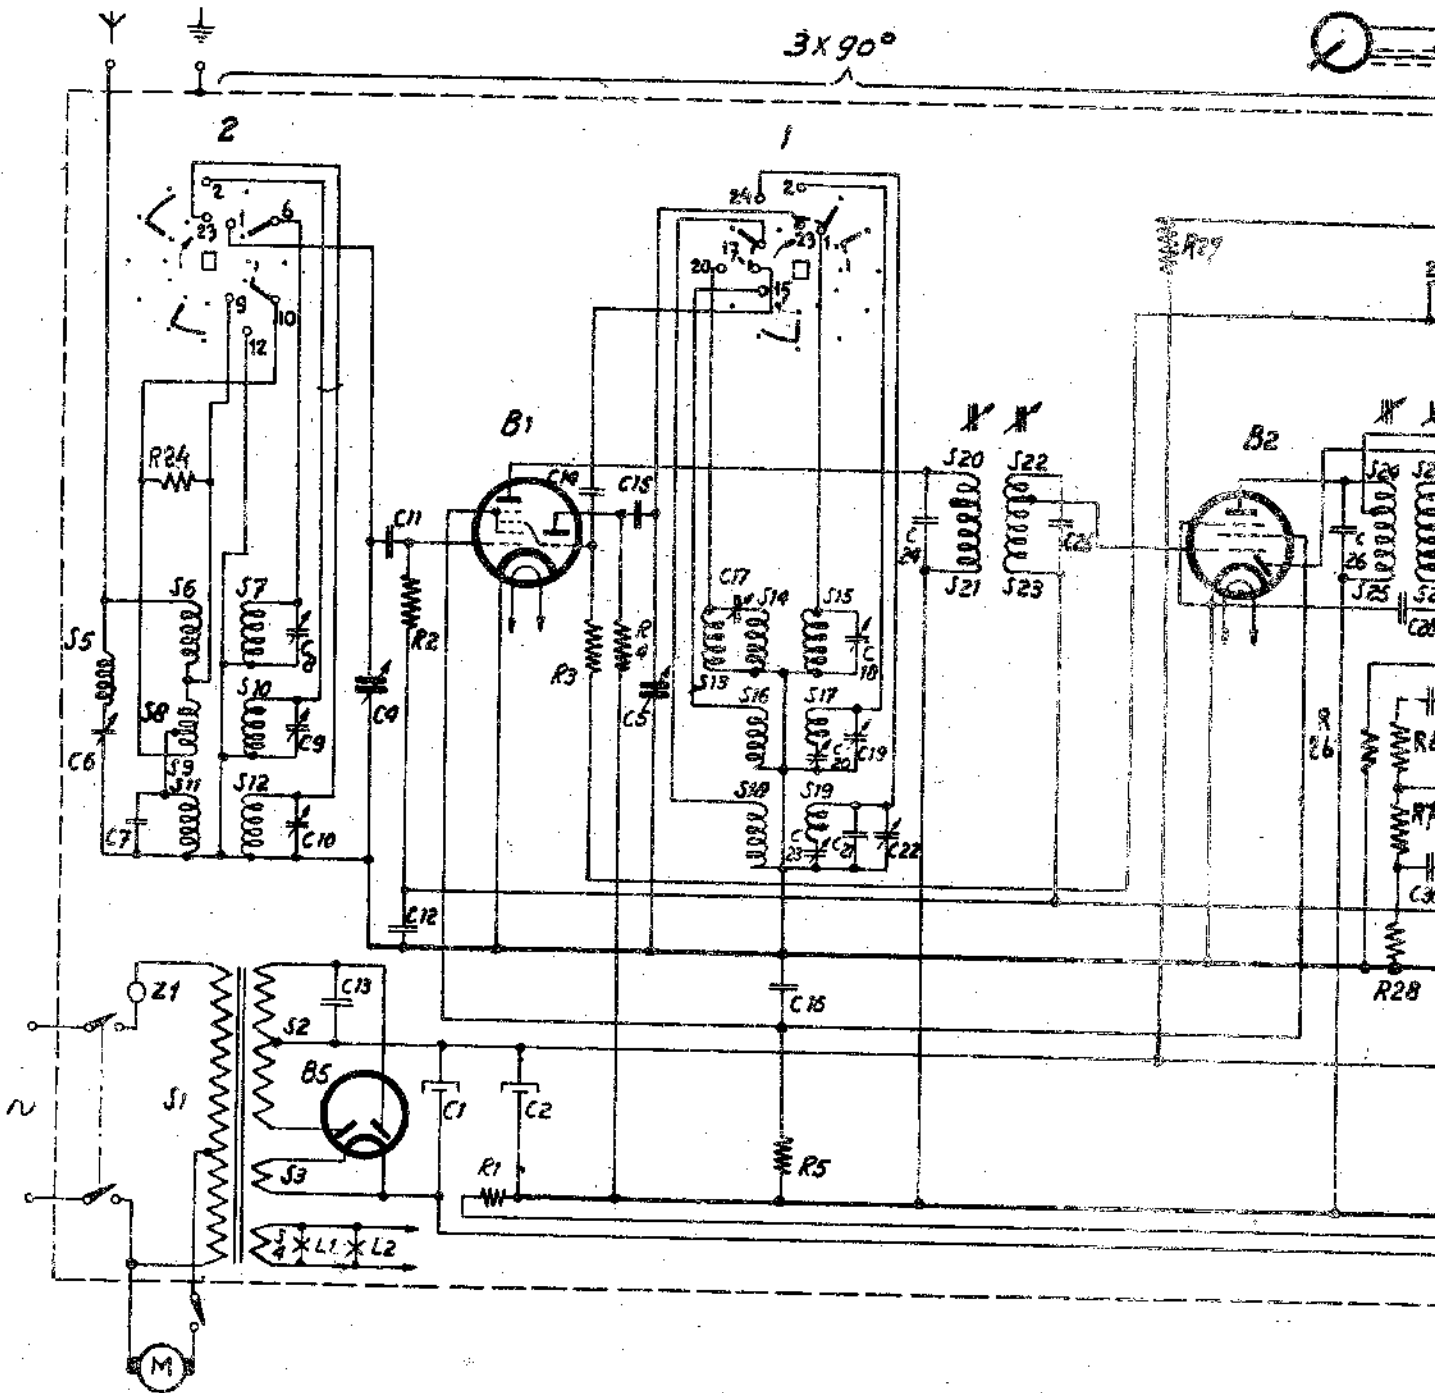

24, 25, 26, 27	28, 29, 30, 31, 32
28, 29, 30, 31, 32, 33, 35, 36, 37	37
36, 6, 7, 8, 9, 10, 11, 28, 29, 12, 13, 14, 15, 16, 17, 18, 21, 22, 19, 20	23, 25

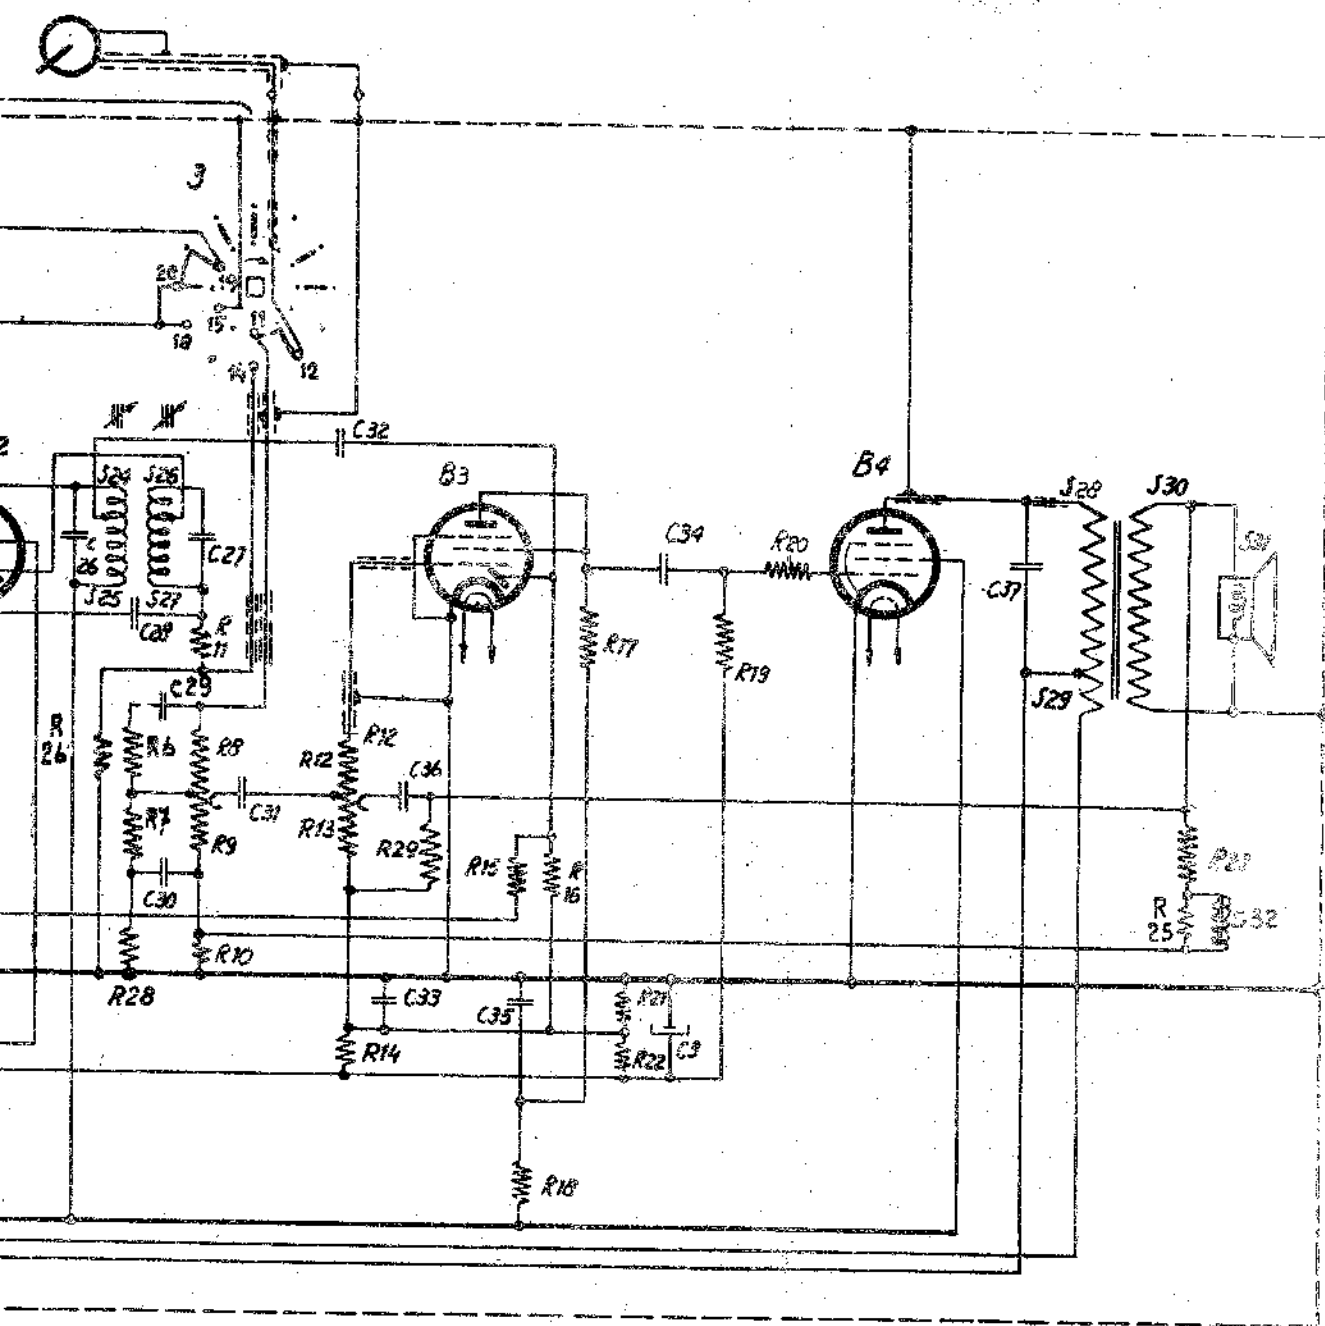

R11316

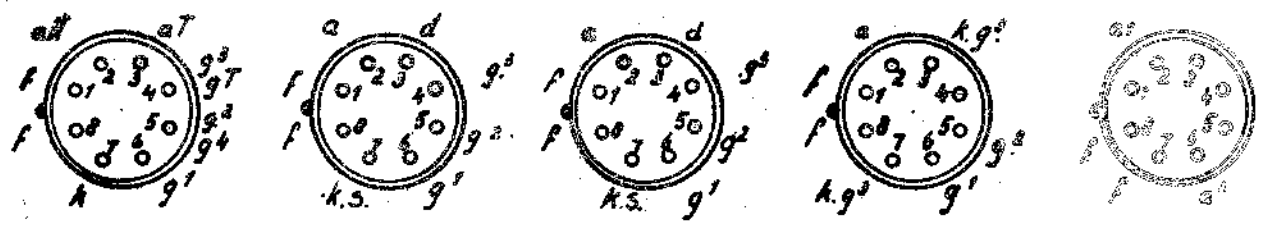

SPOELEN-COILS-BOBINES-SPULEN

Z1, S1, S2, S3, S4	A5 141 44.0	S20	3 Ohm	
S5 35 Ohm	A3 110 60.1	S21	4,8 Ohm	
S6 2 Ohm		S22	3 Ohm	A3 121 94.1
S7 <1 Ohm		S23	4,8 Ohm	
S8 50 Ohm	A3 122 77.0	C24	1,5 pF	
S9 50 Ohm		C25	115 pF	
S10 5 Ohm		S24	3 Ohm	
S11 180 Ohm		S25	4,8 Ohm	
S12 40 Ohm		S26	3 Ohm	A3 121 94.1
S13 1,8 Ohm	A3 121 82.0	S27	2,8 Ohm	
S14 <1 Ohm		C28	1,5 pF	
S15 <1 Ohm		C27	115 pF	
S16 2,8 Ohm		S28	720 Ohm	
S17 7 Ohm	A3 121 83.0	S29	20 Ohm	A3 151 15.0
S18 5 Ohm		S30	<1 Ohm	
S19 18 Ohm		S32	2,8 Ohm	A1 108 29.1

CONDENSATOREN-CONDENSERS-CONDENSATEURS-KONDENSATOREN

C1 50 uF	48 317 39/50+50	C19	30 pF	28 212 36.4
C2 50 uF		C20	400-575 pF	49 005 25.0
C3 100 uF	48 313 52/100	C21	27 pF	48 406 10/27K
C4 12-492 pF	49 001 31.0	C22	30 pF	28 212 36.4
C5 12-492 pF		C23	275 pF	49 005 25.0
C6 50 pF	28 212 36.4	C24	wie Spulen	
C7 22 pF	48 406 10/22K	C25	see coils	
C8 25 pF	49 005 29.0	C26	voir bobines	
C9 25 pF	49 005 29.0	C27	siehe Spulen	
C10 24 pF	49 071 16.0	C28	27 pF	48 406 10/27K
C11 220 pF	48 406 20/220K	C29	120 pF	48 406 10/120K
C12 47000 pF	48 750 20/47K	C30	10000 pF	48 750 20/10K
C13 22000 pF	48 758 20/22K	C31	4700 pF	48 751 20/47K
C14 82 pF	48 406 10/82K	C32	30 pF	48 406 10/30K
C15 470 pF	48 406 20/470K	C33	22000 pF	48 750 20/22K
C16 47000 pF	48 751 20/47K	C34	10000 pF	48 751 20/10K
C17 275 pF	49 005 33.0	C35	0.1 uF	48 751 20/100K
C18 30 pF	28 212 36.4	C36	160 pF	48 406 10/160K
		C37	6800 pF	48 758 20/68K

WIDERSTANDEN-RESISTANCES-RESISTANCES-WIDERSTÄNDE

R1 1200 Ohm	48 468 10/1K2	R16	1,5 MOhm	48 425 10/1M5
R2 0,82 MOhm	48 425 10/820K	R17	0,1 MOhm	48 425 10/100K
R3 22000 Ohm	48 425 10/22K	R18	0,1 MOhm	48 425 10/100K
R4 27000 Ohm	48 427 10/27K	R19	0,56 MOhm	48 425 10/560K
R5 39000 Ohm	48 427 10/39K	R20	1000 Ohm	48 425 10/1K
R6 1,5 MOhm	48 426 10/1M5	R21	33 Ohm	48 425 10/33K
R7 27000 Ohm	48 425 10/27K	R22	68 Ohm	48 425 10/68K
R8 0,65 MOhm	49 500 19.0	R23	22 Ohm	48 425 10/22K
R9 0,2 MOhm		R24	0,1 MOhm	48 425 10/100K
R10 10/2 Ohm	48 425 10/10K	R25	680 Ohm	48 425 10/680K
R11 47000 Ohm	48 425 10/47K	R26	0,36 MOhm	48 425 10/360K
R12 0,2 MOhm	49 475 14.0	R27	4700 Ohm	48 425 10/47K
R13 2 MOhm		R28	0,27 MOhm	48 425 10/270K
R14 0,82 MOhm	48 425 10/820K	R29	0,39 MOhm	48 425 10/390K
R15 1,5 MOhm	48 426 10/1M5			