


Albis 460

Kondensatoren und Widerstände zu ALBIS 460		Pos.	Wert
6	10000 pF	24	200 Ohm
8	30 pF	26	20 k Ohm
21	50000 pF	39	20 k Ohm
22	20000 pF	48	350 Ohm
25	20000 pF	50	200 k Ohm
27	100 pF	56	400 k Ohm
49	0,1 uF	59	200 k Ohm
51	0,1 uF	61	1 Megohm
57	100 pF	63	2 Megohm
58	5000 pf	64	1 Megohm
65	25 pF	66	10 k Ohm
68	8 uF	67	5 k Ohm
71	1 MF	69	200 k Ohm
72	10000 pF	70	50 k Ohm
76	8 uF	73	600 k Ohm
78	500 pF	74	200 k Ohm
83	10000 pF	75	100 Ohm
87	500 pF	77	400 Ohm
88/89	2 x 9 uF	81	200 Ohm
93	0,1 uF	84	0,5 Megohm
		85	500 k Ohm
		86	1,5 Megohm
		91	22 k Ohm
		91a	90 k Ohm
		92	20 k Ohm
		94	1 Megohm

**ALBISWERK
ZÜRICH A.G.**

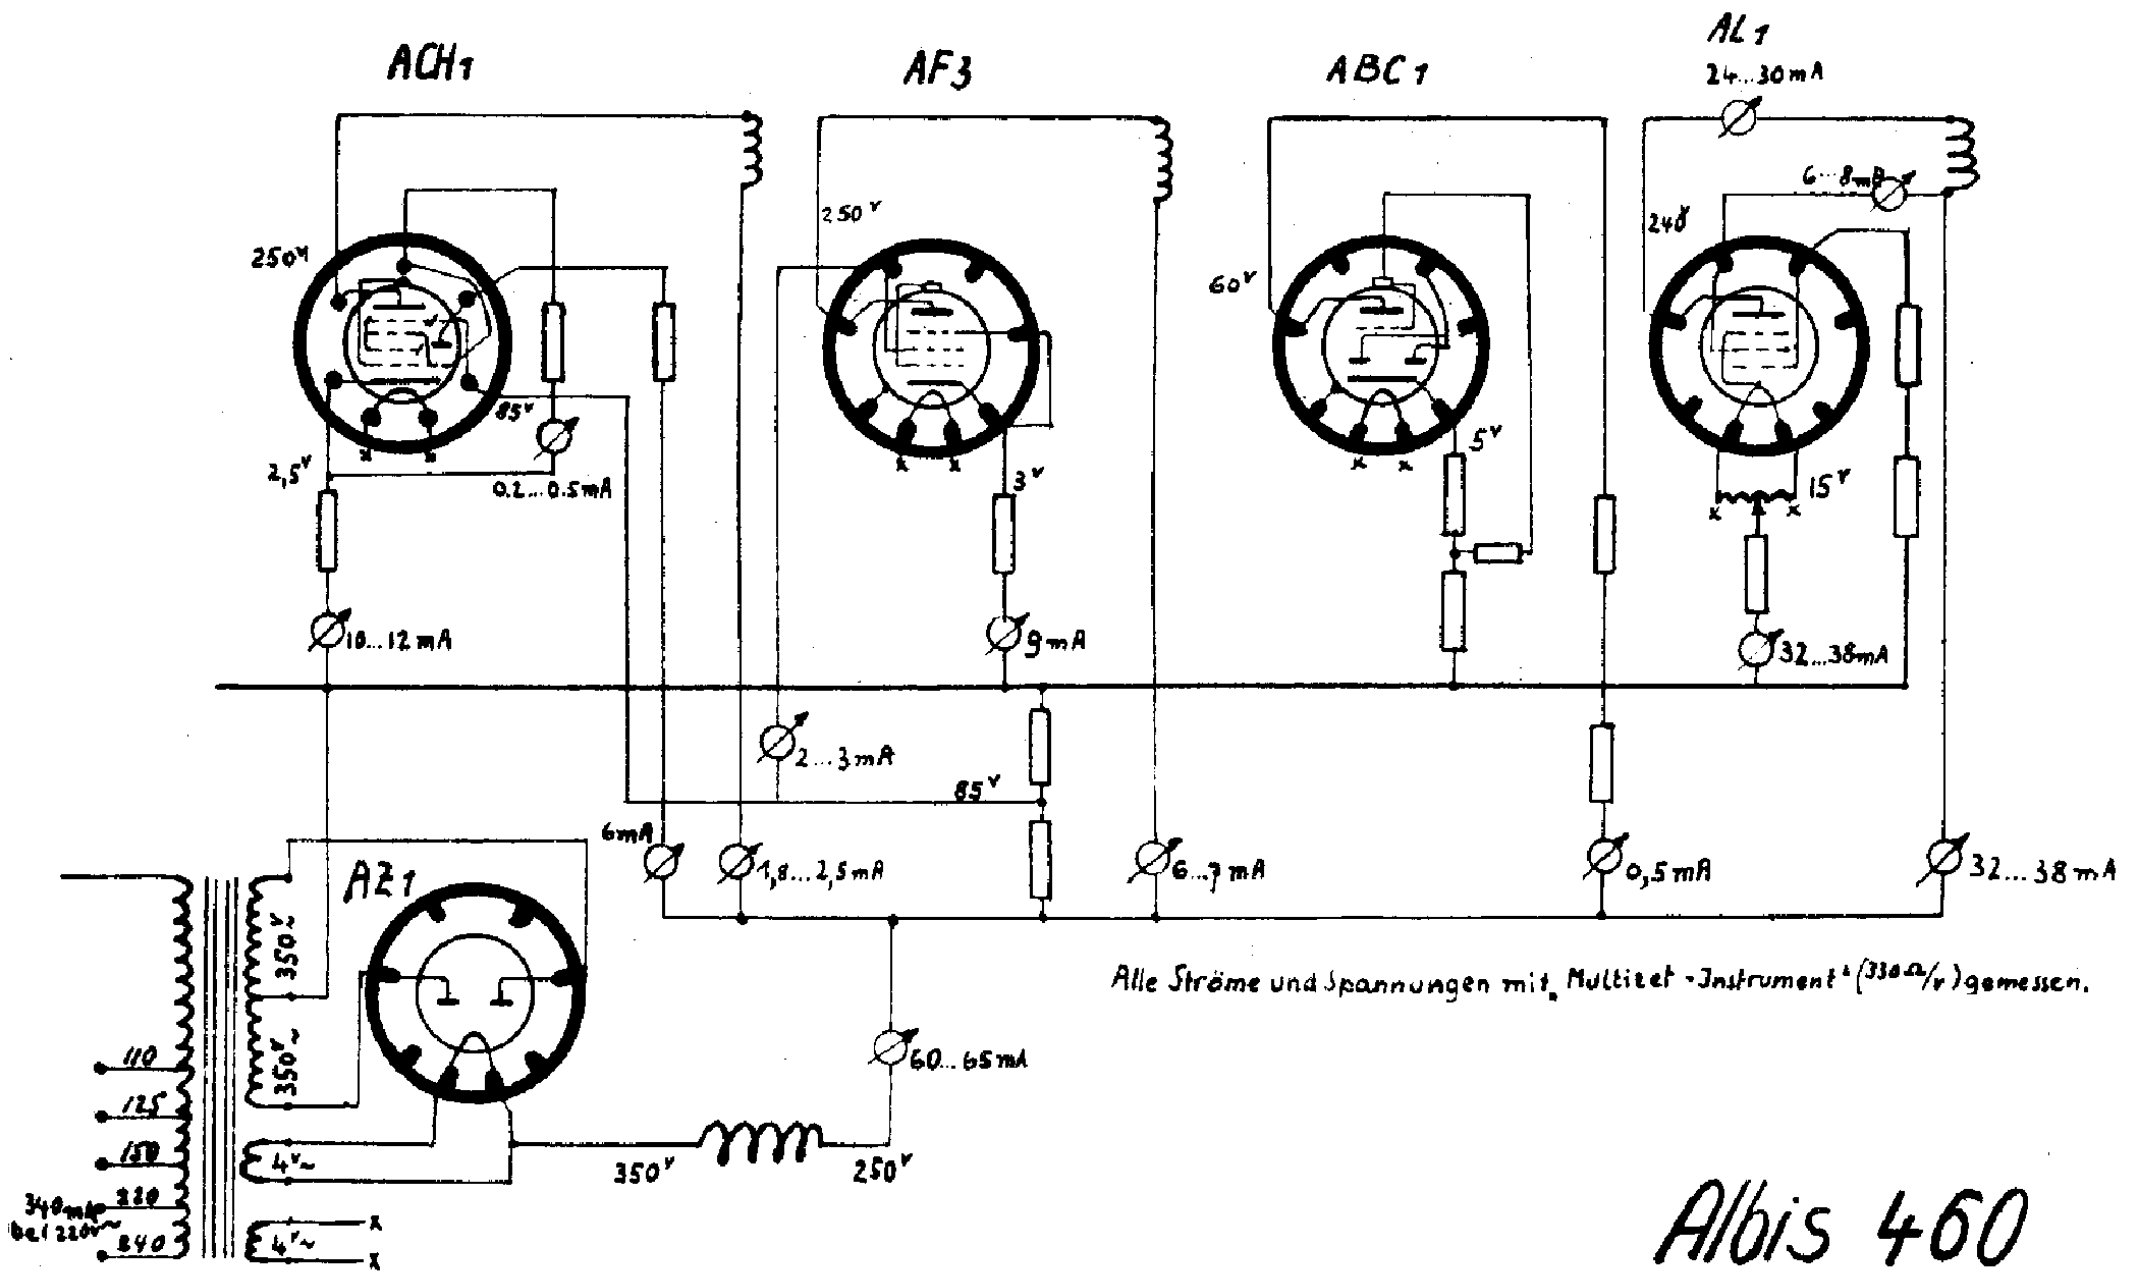

Alle Ströme und Spannungen mit Multitester-Instrument (330Ω/V) gemessen.

Albis 460