

PARTS LIST AND DESCRIPTIONS (Continued) COILS (RF-IF)

ITEM No.	USE	DC RES.		REPLACEMENT DATA			NOTES
		PRI.	SEC.	EMERSON PART No.	MEISSNER PART No.	MILLER PART No.	
L1	Loop Ant.	.80		700074			
L2	Osc. Coil	.80	80	716072	14-1073		
L3	Input IF	22Ω	23Ω	720152	13-6756	BC-352	12-C1
L4	Output IF	22Ω	22Ω	720152	13-6753	BC-353	12-C2

SELENIUM RECTIFIER


ITEM No.	RATING	EMERSON PART No.	REPLACEMENT DATA			SARKIS TARZIAN PART No.
			SYLVANIA PART No.	SELETRON PART No.	FEDERAL PART No.	
M1	.080	817024		871		65

BATTERIES

ITEM No.	VOLTAGE	EMERSON PART No.	REPLACEMENT DATA				INSTALLATION NOTES
			EVEREADY	"A-B"	"A"	BURGESS	
M2	1.5	EM236	964		2R	P45	(2 Used)
M3	67.5	EM216	477				

MISCELLANEOUS

ITEM No.	PART NAME	EMERSON PART No.	NOTES
M4	Tuning Capacitor	900088	15-213MMF, 13-110MMF
M5	Switch	510093	Interlock
M6	Cabinet Front	510092	Power Transfer
	Back		Specify Color
	Handle		Specify Color
	Dial Assy.	460357	Specify Color
	Dial Assy.	460365	Ebony & Gold
	Dial Assy.	460374	Saddle Tan & Gold
	Knob	450139	French Grey & Gold

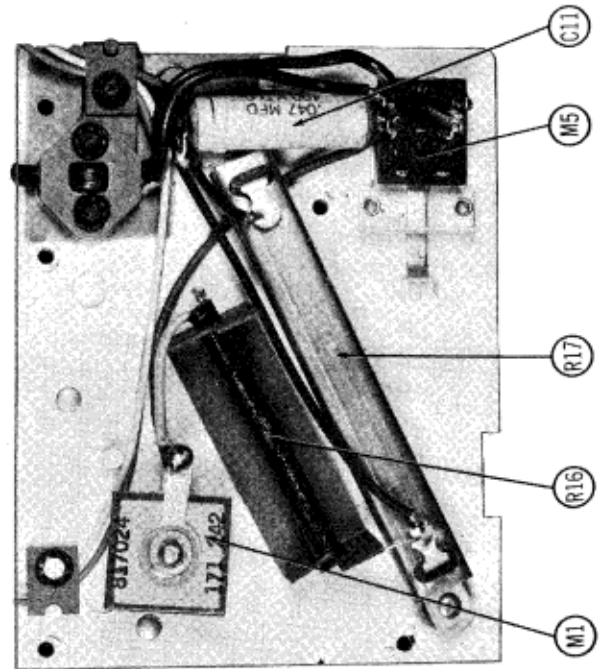

CHASSIS—BOTTOM VIEW

