


6 K 6-G

6 K 6-G

PENTHODE
(E)

V_f	=			6,3	V.	
I_f	=			0,3	A.	
V_a	=	100	135	180	250(max)	V.
V_{g2}	=	100	135	180	250(max)	V.
V_g	=	-7	-10	-13,5	-18	V.
I_a	=	9,0	12,5	18,5	32	mA.
I_{g2}	=	1,6	2,2	3,0	5,5	mA.
g	=	150	150	150	150	
R_i	=	103,5	94	81	68	k Ω
S	=	1,45	1,6	1,85	2,2	mA/V.
$W_o(10\%)$	=	0,33	0,75	1,5	3,4	W _{tt.}
R_a	=	12,0	10,4	9,0	7,6	k Ω
R_k	=	660	680	630	480	Ω

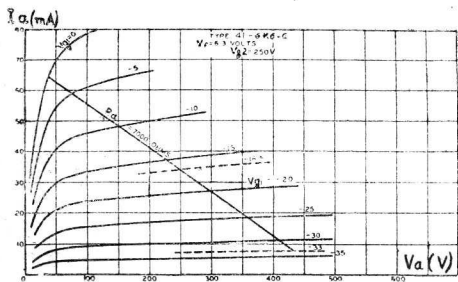

6K6-G