


25 A 6
25 A 6-G

25 A 6
25 A 6-G

PENTHODE
(E)

| | | | | | |
|----------|---|-------|-------|----------|------------------|
| V_f | = | | 25 | V. | |
| I_f | = | | 0,3 | A. | |
| V_a | = | 95 | 135 | 180(max) | V. |
| V_{g2} | = | 95 | 135 | 135(max) | V. |
| V_g | = | -15 | -20 | -20 | V. |
| I_a | = | 20 | 37 | 38 | mA. |
| I_{g2} | = | 4 | 8 | 7,5 | mA. |
| g | = | 90 | 85 | 100 | |
| R_i | = | 45 | 35 | 40 | k Ω |
| S | = | 2 | 2,45 | 2,5 | mA/V. |
| W_o | = | 0,9 | 2 | 2,75 | W _{tt.} |
| R_a | = | 4.500 | 4.000 | 5.000 | Ω |
| R_k | = | 625 | 440 | 440 | Ω |

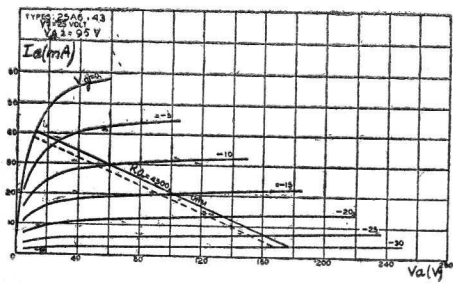

25A6(G)