


ARVIN HOME RADIC
12SA7

12SK7

CHASSIS RE-76

12SQ7

50L6GT

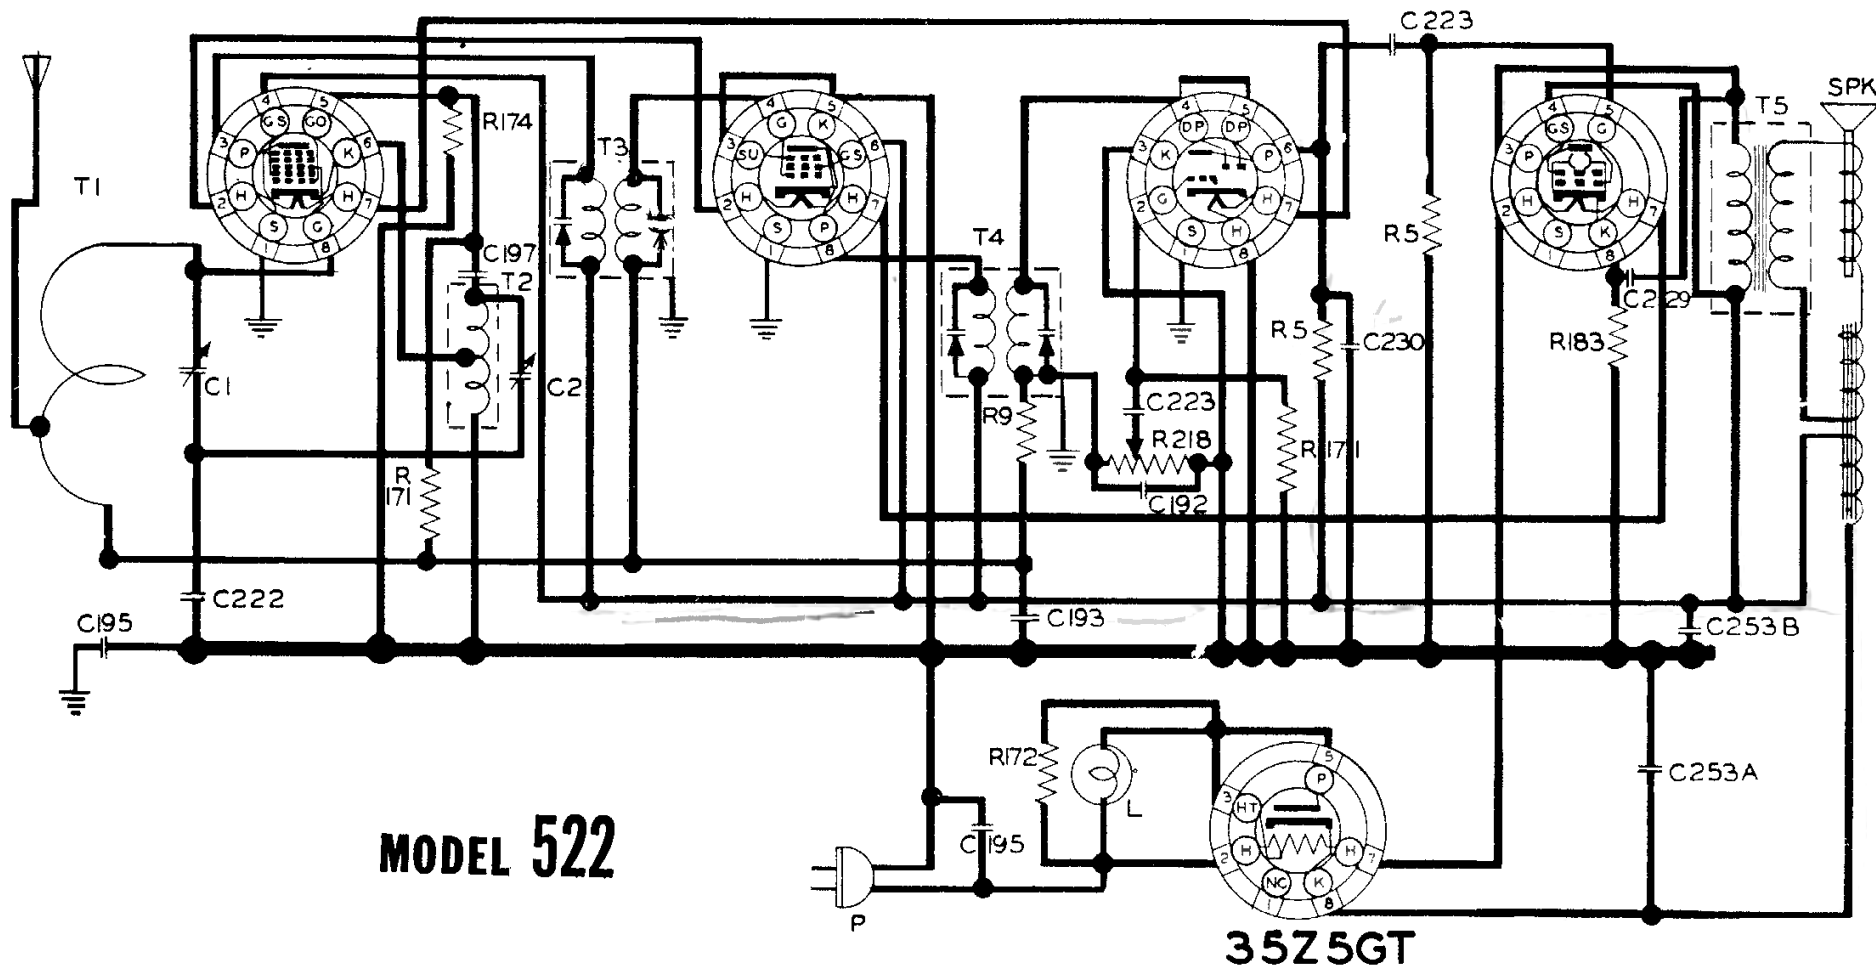

MODEL 522

35Z5GT

RESISTORS			CONDENSERS			TRANSFORMERS			MISCELLANEOUS UNITS		
R	OHM/W	PART NO	C	CAPACITY	VOLT PART NO	T	TYPE	PART NO	SYMBOL	DESCRIPTION	PART NO
28	1M	17-16857	1	TWO GANG	17-16841	1	ANTENNA LOOP	00-16851	L	DIAL LIGHT BULB MAZDA**47	17-16378
5	500K	17-2070	2	VARIABLE	17-14375	2	OSCILLATOR COIL	00-16852	P	LINE CORD & PLUG ASSY	17-16844
183	150	17-14316	253A	20 MFD	150	3	FIRST IF COIL	29-16853	SPK	SPEAKER ASSY	17-16843
174	20K	17-14291	253B	10 MFD	150	4	SECOND IF COIL	29-16854			
172	100	17-14289	192	.00025	600	5	OUTPUT TRANSF	00-16869			
171	5M	17-14288	195	.05	400						
9	1M	17-2080	222	.2	400						
			229	.02	400						
			223	.002	400						
			193	.05	200						
			197	.0001	600						
			230	.0005	400						

IF PEAK 455 K.C.
BALANCE 1400 KC - CHECK AT 600 K.C.
NOBLITT-SPARKS INDUSTRIES, INC.
COLUMBUS, INDIANA

