


EMERSON RADIO & PHONOGRAPH

MODEL - 789B

CHASSIS - 120207-B

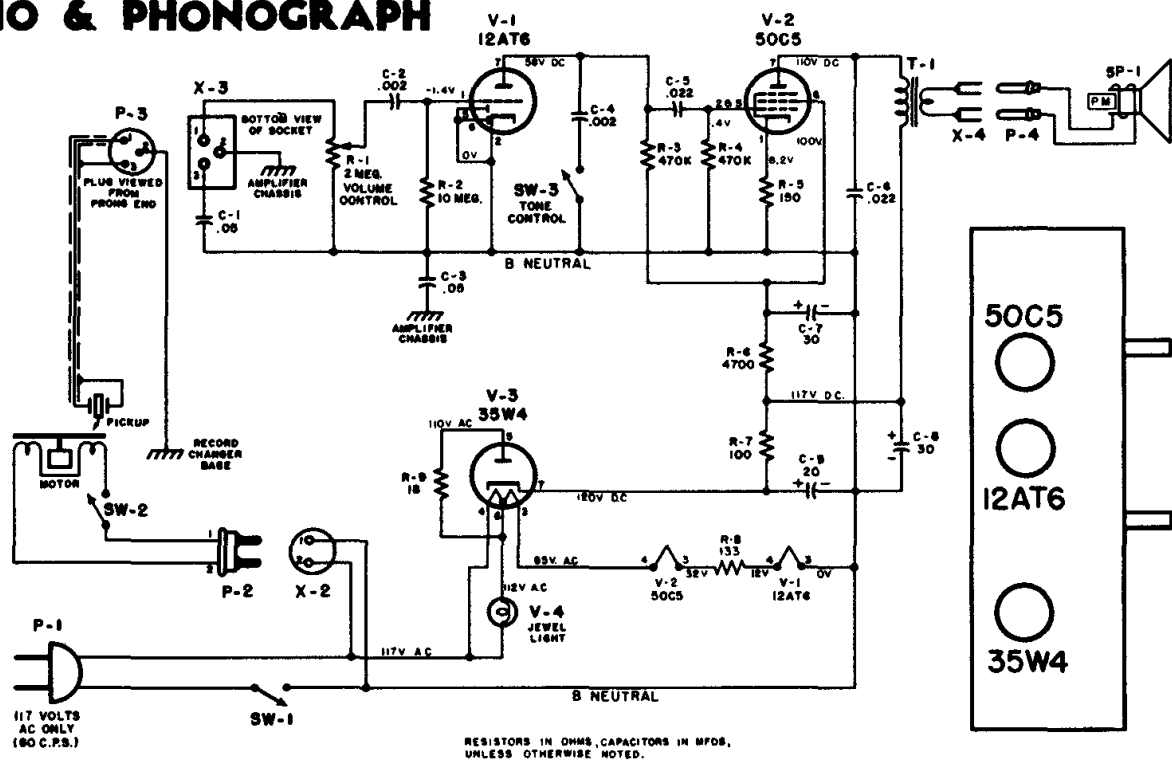

RESISTANCE READINGS FOR CHASSIS 120207-B

SYMBOL	TUBE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7
V-1	12AT6	10 MEG	0 ~	0 ~	12 ~	0 ~	0 ~	*470K ~
V-2	50C5	150 ~	470 ~	145 ~	185 ~	470 ~	*4700 ~	*250 ~
V-3	35W4	2 MEG †	2 MEG †	185 ~	205 ~	220 ~	205 ~	2 MEG †

* Resistance measured to Pin 7 of rectifier 35W4 (B+).

† Measured with VTVM R \times 10,000 when using other meters allow reading to settle (1 min.)

Emerson Radio and Phonograph *** Models 806 and 807

RESISTANCE READINGS

SYMBOL	TUBE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8
V-1	25L6	N.C.	18 ~	*150 ~	*2700 ~	Vary Vol. Control 153K to 1.1 Meg.	36 ~	0 ~	150 ~

* Taken with respect to positive terminal of Selenium Rectifier.

