


# CORONET model 6B1

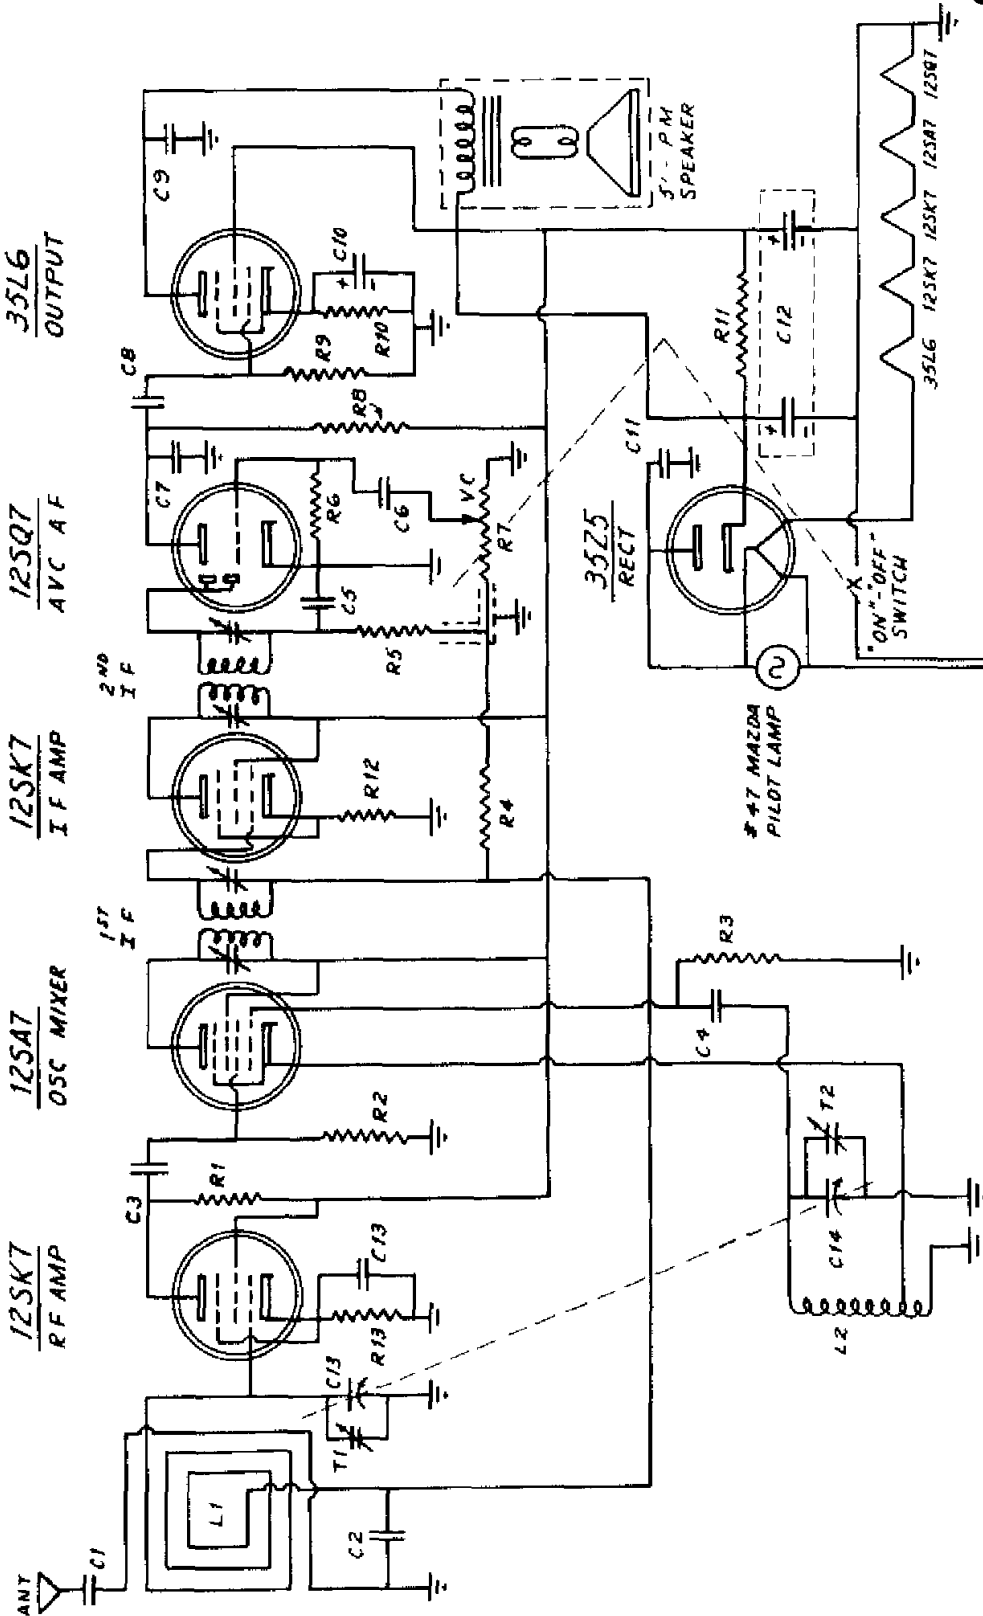

TUNING RANGE - 540 - 1650 KC  
INT FREQ - 455 KC

ITEM NOS.	RATING	VALUE
R1	1/3 to	4700-5100Ω
R2, R8	"	220K-250K
R3	"	22K-24K
R4, R6	"	1.5 MEG-2 MEG.
R5	"	47K-51K
R7	VOL. CONT.	500K
R9	1/3 W	470Ω - 510K
R10, R12, R13	"	150Ω - 180Ω
R11	2W.	1000Ω
C1		.002 - .005 MFD.
C2, R11, R13		.05
C3, R7		.00018
C4		.000082
C5		.0002 - .0003
C6, R8		.005
C9		.01
C10		49 (CAN)
C12		40 - 40
WISC.		
L1		ANT. LOOP
L2		OSC. COIL
L3, L4		3-15 MFD.
L5, L6		420
L7, L8		162

MOUNTED ON  
C13 - C14  
VAR. COND.  
GANG