


# KNIGHT MODEL 5G563

## ALLIED RADIO C O R P O R A T I O N

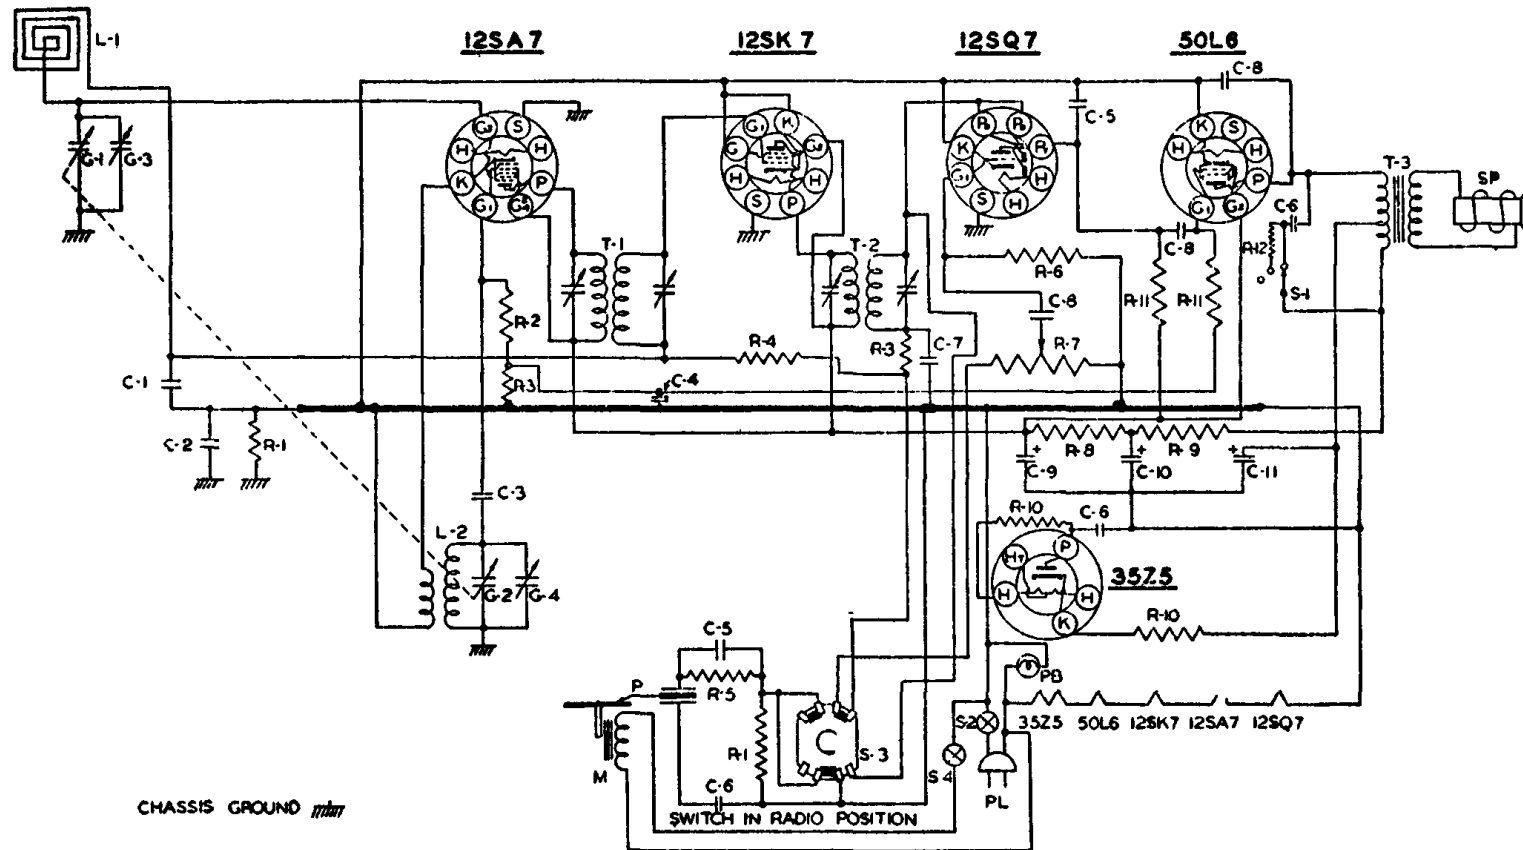

| PART NO. | DESCRIPTION                           |
|----------|---------------------------------------|
| PC-2     | C-1 .05MFD. CONDENSER 200V.           |
| PC-8     | C-2 .1MFD. CONDENSER 400V.            |
| MC-4     | C-3 .00005MFD. MICA.                  |
| PC-4     | C-4 .25MFD. CONDENSER 200V.           |
| MC-5     | C-5 .0005MFD. MICA                    |
| PC-5     | C-6 .05MFD. CONDENSER 400V.           |
| MC-7     | C-7 .0001MFD. MICA                    |
| PC-7     | C-8 .01MFD. CONDENSER 400V.           |
| EC-14    | C-9 20MFD. ] 150WV. ELECTROLYTIC      |
|          | C-10 40MFD. ]                         |
|          | C-11 40MFD. ]                         |
| IR-20    | R-1 220M $\Omega$ RESISTOR 1/2W. 20%  |
| IR-9     | R-2 22 M $\Omega$ RESISTOR 1/2W. 20%  |
| IR-10    | R-3 47 M $\Omega$ RESISTOR 1/2W. 20%  |
| IR-23    | R-4 33MEG $\Omega$ RESISTOR 1/2W. 20% |
| IR-12    | R-5 1MEG $\Omega$ RESISTOR 1/2W. 20%  |
| IR-13    | R-6 22MEG $\Omega$ RESISTOR 1/2W. 20% |
| VC-4     | R-7 1MEG. VOLUME CONTROL              |
| IR-1     | R-8 470 $\Omega$ RESISTOR 1/2W. 20%   |
| IR-42    | R-9 1000 $\Omega$ RESISTOR 1 W. 10%   |
| IR-17    | R-10 33 $\Omega$ RESISTOR 1/2W. 20%   |
| IR-11    | R-11 470M $\Omega$ RESISTOR 1/2W. 20% |
| IR-15    | R-12 2200 $\Omega$ RESISTOR 1/2W. 30% |
| GC-5     | G-1 GANG CONDENSER                    |
|          | G-2 ANT. TRIMMER                      |
|          | G-3 OSC. TRIMMER                      |
|          | G-4                                   |
| LI-6     | T-1 INPUT I.F. TRANSFORMER            |
| LI-7     | T-2 OUTPUT I.F. TRANSFORMER           |
|          | T-3 OUTPUT TRANSFORMER                |
| LL-17    | L-1 LOOP ANT.                         |
| LO-14    | L-2 OSC. COIL                         |
| SPK-12   | SP 5" PM. SPEAKER                     |
| SW-2     | S-1 TONE SWITCH                       |
|          | S-2 SWITCH ON VOLUME CONTROL          |
| SW-1     | S-3 PHONO-RADIO SWITCH                |
|          | S-4 SWITCH ON RECORD CHANGER          |
| AC-M-7   | M RECORD CHANGER MOTOR                |
| AC-PU-7  | P CRYSTAL PICKUP ARM CARTRIDGE        |
| PB-2     | PB 110V. 7 1/2W. PILOT BULB           |
| CO-2     | PL LINE CORD                          |