


MAJESTIC-MODEL 116-AUTOMOBILE RECEIVER

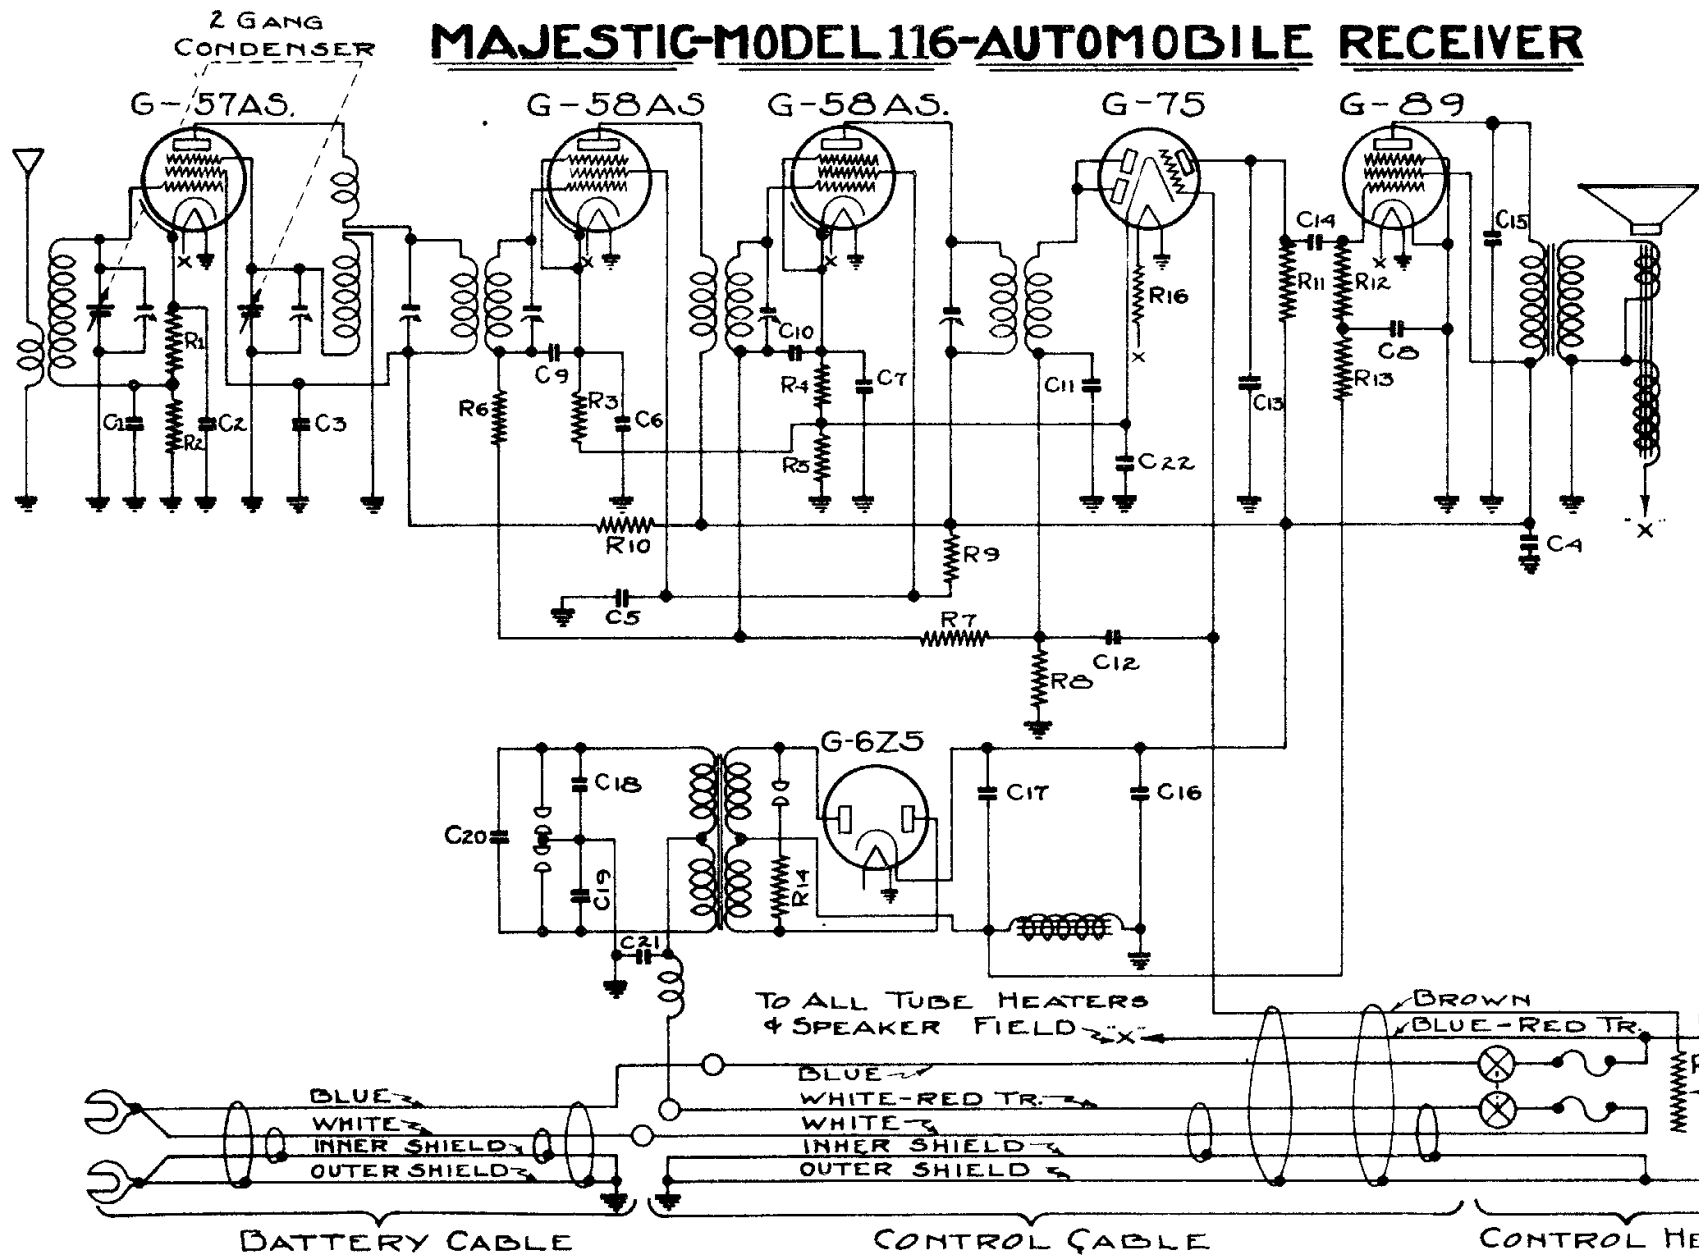

CONDENSER VALUES

NO.	MFD.	NO.	MFD.
C1	.1	C12	.01
C2	.03	C13	.005
C3	.03	C14	.01
C4	.25	C15	.005
C5	.5	C16	8.0
C6	.1	C17	8.0
C7	.1	C18	.1
C8	.1	C19	.1
C9	.03	C20	.5
C10	.01	C21	1.0
C11	.0005	C22	.01

RESISTOR VALUES

NO.	OHMS	NO.	OHMS
R1	300	R9	30,000
R2	3000	R10	15000
R3	200	R11	99,000
R4	200	R12	250,000
R5	150	R13	250,000
R6	99,000	R14	40,000
R7	500,000	R15	250,000
R8	99,000		VOLUME CONTROL
		R16	1.5 OHMS.

I.F. 175 KC.